

EarthArXiv Submission Cover Sheet

Manuscript title: Operational SAR Flood Mapping as a Full-Stack Systems Problem: An AI-Enabled Perspective

Author: Qing Yang

Peer-review and version status

This PDF is the author's accepted manuscript (peer-reviewed postprint) prepared for EarthArXiv. It is not the final typeset journal PDF.

The manuscript has been accepted for publication in **Frontiers in Water**.

Journal DOI: 10.3389/frwa.2026.1871753

Recommended citation: Yang Q. (2026). Operational SAR flood mapping as a full-stack systems problem: an AI-enabled perspective. *Frontiers in Water*, 8:1871753. <https://doi.org/10.3389/frwa.2026.1871753>

Submission note

This cover sheet is included to satisfy EarthArXiv submission guidelines requiring clear front-matter identification of peer-review status, journal, and DOI for postprints.

Version prepared for repository upload: June 25, 2026.

Operational SAR Flood Mapping as a Full-Stack Systems Problem: An AI-Enabled Perspective

Qing Yang

Cooperative Institute for Satellite Earth System Studies
Earth System Science Interdisciplinary Center
University of Maryland, College Park, MD 20740, USA

Abstract

Flood mapping with synthetic aperture radar (SAR) has long been framed primarily as a problem of improving inundation detection algorithms. Although that framing has produced major advances, it increasingly understates what operational flood monitoring requires in practice. Useful flood products depend on the coordinated performance of data access, preprocessing, ancillary information, model logic, computational infrastructure, validation, and long-term maintenance. This perspective argues that SAR flood mapping should therefore be understood as a full-stack operational systems problem rather than only an algorithm-selection exercise. Building on the field's transition from prototype workflows to institutional operational services, the paper further argues that the present moment is especially important because mature SAR archives, accessible global ancillary datasets, scalable computing environments, and AI-agent systems now coexist. To ground that argument, the paper presents a real SIENA rebuilding case in which an AI-agent-assisted, human-supervised development process was used to restore and redesign an operational Sentinel-1 flood workflow, and summarizes comparative evidence from four quantitative evaluation settings using operational remote-sensing water and flood products and survey-style references, including VIIRS-FIM, NOAA Emergency Response Imagery, DSWX-HLS, and DSWX-S1. The resulting SIENA workflow now supports routine public production over CONUS and Alaska, with updates issued several times per day. The manuscript therefore advances a practical perspective for linking algorithmic components, system integration, and adaptive development, while emphasizing that AI-assisted workflows must remain grounded in hydrologic reasoning, validation, and human oversight to support timely and trustworthy flood monitoring.

1 Introduction

Flood monitoring has always been a practical science. When the water rises, nobody asks whether a method was elegant in the lab. They ask whether the map is right, whether it arrives on time, and whether it is useful enough to support decisions. Synthetic aperture radar (SAR) has therefore held a special place in flood mapping for decades because its all-weather, day-and-night observing capability makes it one of the few Earth observation technologies that remains useful under the very conditions in which flood information matters most.

That practical value produced a long and diverse literature. Early studies showed that SAR could support flood delineation even under the constraints of sparse acquisitions and immature processing environments [Delmeire, 1997, Oberstadler et al., 1997]. Over time, the field expanded from thresholding and change detection toward segmentation, coherence analysis, probabilistic inference, and increasingly automated workflows [Martinis et al., 2009, Twele et al., 2016, Giustarini et al.,

2016, Chini et al., 2017, Landuyt et al., 2019, Shen et al., 2019b, Amitrano et al., 2024]. In parallel, researchers increasingly recognized that flood mapping was never only an image-classification problem. It was also a hydrologic and operational problem involving topography, water connectivity, reference conditions, validation, and eventual product use [Bates et al., 1997, Matgen et al., 2007, Schumann et al., 2009, Schumann and Moller, 2015].

That broader systems view matters now because the field has reached a different stage of maturity. Much of the literature still describes progress in SAR flood mapping primarily as progress in algorithms, as if the central question were simply which model detects floodwater best. In practice, operational flood mapping depends on a maintained stack: data access, preprocessing, ancillary context, initialization logic, pixel-level detection, object-level refinement, uncertainty communication, compute resources, deployment constraints, and long-term maintenance. The detector matters, of course, but by itself it is not the whole system. In practice, the detector is only one component within a much larger operational chain.

This systems perspective has become harder to ignore as major institutions have moved from method development toward ready-to-use or large-scale operational products. Systems such as the Copernicus Emergency Management Service Global Flood Monitoring platform and NASA's OPERA-related dynamic surface water products show that the field has matured beyond event-specific demonstrations [Salamon et al., 2021, Wagner et al., 2026, Jung et al., 2026, Yang et al., 2021]. These efforts make clear that operational readiness is not achieved by algorithmic novelty alone. It requires reference products, archive design, quality-control logic, scalable processing, and institutional commitment. Just as importantly, they sit on top of a much richer supporting environment than earlier generations had available, including globally accessible surface-water occurrence data, elevation products, land cover, and other hydrologically relevant ancillary layers [Pekel et al., 2016].

That convergence is one reason this is an unusually important moment for the field. The demand for rapid flood monitoring is now widespread across public agencies, forecast centers, and risk sectors. Global ancillary datasets are more available and more accessible than ever before. Decades of SAR flood research have produced a mature methodological toolbox spanning open-water mapping, urban flood detection, vegetation-related challenges, probabilistic reasoning, and increasingly large-scale automation [Grimaldi et al., 2020, Zhao et al., 2022, Bauer-Marschallinger et al., 2022]. Cloud and high-performance computing have made large-scale processing more realistic. And large language models and AI-agent systems are beginning to provide a new path for turning hydrologic and remote-sensing knowledge into executable workflows. Put simply, the present moment is favorable for AI-enhanced system development because the flood-monitoring ecosystem has finally become mature enough for that development to matter operationally.

This paper argues that SAR flood mapping should now be treated primarily as a full-stack systems problem for operational flood mapping. It reframes flood mapping as a maintained operational stack rather than only an algorithmic task, presents an adaptive closed-loop development framework centered on initialization, pixel-level detection, and object-level rule refinement, and argues that AI-agent systems can accelerate the development of next-generation flood mapping systems by translating accumulated hydrologic knowledge, Earth observation infrastructure, and engineering logic into operational-ready workflows. To keep that perspective grounded, the paper also summarizes a real SIENA rebuilding case supported by four comparative evaluation settings and by routine public production over CONUS and Alaska, with detailed figures, metrics, and caveats moved to supplementary materials.

The perspective advanced here is therefore not a break with the history of SAR flood science. It is a continuation of that history under new conditions: stronger data infrastructure, stronger operational demand, and new AI-assisted development tools. The next sections build that case by

tracing how the field moved from prototype algorithms to operational flood mapping systems, why the present moment is different, and how a full-stack framework can help guide future development.

2 The Path from Prototype Algorithms to Operational Systems

Satellite SAR flood mapping did not mature by discovering one superior inundation algorithm. Its development was phased, and each phase was shaped not only by retrieval logic, but also by satellite availability, preprocessing software, ancillary datasets, computing environments, and institutional capacity. Read historically, the field moved through three broad stages: an early theory-building era, a practical workflow-building era, and the present operational systems era. The key point is that progress came from assembling more complete systems over time, not just from inventing better detectors.

2.1 Early theory, satellite, and experimental design era (1990s–2009)

The first phase was defined by theory building under limited data conditions. During the 1990s and early 2000s, SAR flood mapping was constrained by sparse acquisitions, limited revisit frequency, difficult data access, and relatively small collections of case studies. In that setting, the field focused on understanding how flooded surfaces appear in SAR imagery and on establishing the conceptual foundations of flood retrieval.

Important methodological ideas emerged in this period, including threshold-based water extraction, histogram analysis, split-based thresholding, active contour approaches, segmentation logic, and early object-oriented thinking. The lasting lesson from this work was that flood mapping could not be reduced to one universal low-backscatter threshold. Surface roughness, land cover, local incidence geometry, speckle, urban structures, and vegetation all complicated the SAR flood signal [Shen et al., 2019b, Amtrano et al., 2024].

Operationalization, however, remained limited. Workflows were often assembled manually around one or two scenes, with heavy analyst intervention in preprocessing, threshold selection, region cleaning, and quality control. The field produced foundational knowledge, but most methods still lived as prototypes rather than sustained services. That prototype-heavy base set up the next phase, in which the question shifted from whether SAR flood retrieval could work to how it could be made repeatable.

2.2 Practical development and early services (2010–2019)

The second phase was a practical development era in which operational ambition became much more realistic. Around 2010, high-performance computing became more accessible, server-side processing matured, and remote-sensing software ecosystems improved. As the decade progressed, public ancillary datasets such as land cover, elevation, water occurrence, and hydrologic context layers became easier to integrate into workflows. The launch of Sentinel-1 in 2014 was especially important because it changed the economics of SAR flood monitoring by providing systematic, free, and relatively frequent C-band observations.

During this period, the field moved from isolated algorithm demonstrations toward more reproducible processing chains and early operational services. Early system-oriented studies already emphasized automation and operational lessons [Matgen et al., 2011, Pulvirenti et al., 2011, Martinis et al., 2009]. Later, automated Sentinel-1 pipelines, TerraSAR-X services, and large-scale monitoring studies showed that end-to-end flood workflows were becoming technically plausible under many open-water conditions [Martinis et al., 2015a,b, Twele et al., 2016, Pulvirenti et al., 2021,

Yang et al., 2021, Zhao et al., 2021b]. At the same time, methodological development remained active: change-detection approaches became more useful in complex scenes, especially urban environments, while thresholding, probabilistic reasoning, object constraints, and ancillary topographic information were increasingly combined into more coherent stacks [Li et al., 2018b, Zhao et al., 2022, Giustarini et al., 2016, Chini et al., 2017, Landuyt et al., 2019].

This era also revealed a harder lesson: a processing chain is not the same thing as an operational system. Even when major steps were automated, robustness remained uneven across snow-affected terrain, arid regions, vegetated floodplains, urban landscapes, and scenes with weak reference conditions [Landuyt et al., 2019, Grimaldi et al., 2020, Singha et al., 2020, Jiang et al., 2021]. The field had learned how to automate many components, but not yet how to sustain globally reliable flood services. That gap between workflow automation and service-level reliability opened the door to the current phase, where the emphasis shifts from pipeline construction to product architecture and operational permanence.

2.3 Operational systems and AI-ready infrastructure (2020–present)

The current phase is defined by the rise of full operational architectures. By this stage, decades of retrieval knowledge had accumulated, while cloud-accessible ancillary datasets such as DEMs, land cover, surface-water occurrence, and hydrologically structured context layers had become much more available for immediate integration [Pekel et al., 2016]. At the same time, cloud resources, scalable data services, and more standardized processing environments made it increasingly realistic to build services rather than isolated workflows. The field is therefore no longer just proving that SAR flood mapping can work; it is building products that must run repeatedly, communicate uncertainty, and remain maintainable over time.

The Copernicus Emergency Management Service Global Flood Monitoring service is one of the clearest examples of this transition. Early descriptions already framed GFM as a systematic global product [Salamon et al., 2021]. Later work makes explicit that its operational value comes from combining multiple retrieval modes with exclusion layers, monthly and dynamic references, advisory outputs, flood-likelihood information, Bayesian datacube inference, and large-scale Sentinel-1 archive management [Bauer-Marschallinger et al., 2022, Wagner et al., 2026, Zhao et al., 2021a]. OPERA-related DSWx-S1 work illustrates a complementary product lane, showing how globally scalable dynamic surface-water mapping can be built through adaptive thresholding, fuzzy logic, dark-land suppression, bimodality testing, and terrain-informed refinement [Jung et al., 2026]. In both cases, the lesson is broader than any one detector: operational quality now depends on integrating remote sensing, hydrology, geospatial data engineering, computing infrastructure, and product maintenance into one sustained architecture.

This multidisciplinary convergence also clarifies why AI becomes more relevant now. Large language models and AI-agent systems matter here not mainly as replacement classifiers, but as tools for literature synthesis, code generation, workflow design, experiment management, documentation, and cross-sensor adaptation. AI enters at exactly the moment when SAR flood mapping has matured into a full-stack systems problem built on decades of accumulated scientific knowledge and abundant ancillary data. Seen across these three phases, the historical progression points directly to the next section: once flood mapping becomes an operational systems discipline, it has to be framed explicitly as a full-stack systems problem.

3 Why the Present Moment Favors AI-Enhanced Development

The case for AI-enhanced system development in SAR flood mapping should not be made as a generic claim about the rising power of machine learning or large language models. That would be too vague to be useful and too detached from the realities of hydrologic operations. A stronger argument is that the field has reached a particular moment in which three conditions now converge: the supporting foundation is much stronger, the operational need is much broader, and the remaining gap is increasingly developmental rather than purely algorithmic. That is why now is the right time for AI-enhanced system development in SAR flood monitoring.

3.1 Resources and infrastructure now exist

The first reason is that the practical foundation is much stronger than it was in earlier generations of flood mapping. Cloud-accessible ancillary datasets such as DEMs, land cover, surface-water occurrence, and hydrologically structured context layers are now widely available for direct use in workflows. These resources make initialization, refinement, and cross-region transfer much more realistic than when every project had to reconstruct its own environmental context from scratch.

The sensor environment is also richer, and the compute environment is far more capable. Sentinel-1 changed the economics of operational flood monitoring, but it now sits within a broader ecosystem of SAR missions, archives, polarizations, revisit characteristics, and processing conventions. Cloud platforms, server-side processing, high-performance computing, and scalable storage have also made large-area rapid workflows far more practical. In combination, these developments mean that the field now has the ancillary data, sensor diversity, and computational capacity needed to support adaptive system design.

3.2 Operational need has intensified

The second reason is that the demand side has changed. Rapid flood monitoring is no longer an occasional research ambition or a niche emergency product. It has become a standing need across public agencies, forecast centers, disaster response communities, and risk sectors. These users do not merely need a method that performs well in a paper. They need systems that are timely, repeatable, geographically transferable, and usable under real operational constraints.

That demand also becomes more diverse as it grows. Different agencies and regions may need different inputs, different computational budgets, different levels of local expertise, different latency targets, and different preferences for product design or uncertainty handling. Some users may want the fastest robust open-water product. Others may need stronger urban logic, better vegetation handling, tighter local customization, or a workflow that can run under limited infrastructure. Once flood monitoring becomes this heterogeneous and operationally persistent, the key question is no longer only whether floodwater can be detected from SAR. It becomes how quickly a useful system can be configured, adapted, and maintained for each specific need and restriction.

3.3 The remaining gap is system bridging

The third point is that the main gap is increasingly one of system bridging. The field already has many methods, many ancillary resources, and growing operational infrastructure. What it often lacks is a fast and reliable way to connect those pieces to the needs of a particular user, event, region, sensor mix, and computational setting. In practice, this means choosing the most suitable algorithmic pathway, designing an appropriate data pipeline, organizing process-level logic, and

sometimes developing new components when existing ones do not fit. That work is real, necessary, and often slow.

This is exactly where AI becomes relevant. Large language models and AI-agent systems do not replace SAR physics, hydrologic reasoning, or operational oversight. Their value is that they can help shorten the path from distributed knowledge to executable system logic. They can support literature synthesis, code generation, workflow comparison, documentation, debugging, and adaptation across sensors or regions. In other words, AI matters here because the field has matured into a problem of rapid system assembly and adaptation under changing needs.

Seen this way, AI-enhanced system development is not a side topic layered on top of classical SAR flood science. It is a response to the field's present structure. Stronger resources, stronger operational demand, and a persistent system-design gap together create the conditions in which AI can become genuinely useful. The next question, then, is what design tensions become visible once SAR flood mapping is treated explicitly as a full-stack systems problem rather than as a detector contest. That is where the argument now turns.

4 A Full-Stack View of SAR Flood Mapping Systems

4.1 Operational flood mapping as a systems problem

Once the field is viewed through the lens of AI-enhanced system development, the central issue comes into sharper focus: SAR flood mapping is fundamentally a full-stack systems problem. The challenge is not only to improve a detection algorithm, but to organize observations, context, resources, and processing steps into an operationally effective flood mapping system. The problem is therefore defined not only by model performance, but by the conditions under which flood information must be produced, delivered, and used.

This makes the problem task-driven and semi-empirical. In practice, flood monitoring depends on what data are available, what area must be mapped, what supporting information exists, and what resources can be deployed during the event. A system perspective is therefore necessary to connect methodological development with operational flood response. Major operational efforts already point in this direction, because successful flood products depend on data infrastructure, reference layers, processing logic, quality control, and maintainable workflows rather than on a single detector alone [Wagner et al., 2026, Jung et al., 2026].

4.2 System inputs, constraints, and design components

Under this framing, SAR flood monitoring can be viewed as a system defined by multiple interacting inputs. The first and most fundamental input is the SAR observation itself, which provides the primary evidence for flood detection. However, the system may also incorporate forecast or situational information, area-of-interest constraints, and broader event context, all of which can guide where and how the system should operate. In operational settings, these inputs help determine not only where analysis should be focused, but also what kind of response is meaningful and feasible for the event at hand.

A second class of inputs concerns available resources during the event. These include computational capacity, data access, timeliness requirements, available archives, and the possible role of human review or analyst support. A third class consists of the algorithmic design components of the monitoring framework itself. In the present perspective, these include three principal components: initialization, pixel-level detection, and object-level rule refinement. Initialization defines how the system begins under the local scene and prior context. Pixel-level detection extracts candidate

flood signals from the SAR observations. Object-level refinement imposes hydrologic and practical logic so that the resulting product is coherent and usable.

Spatial context and, where available, temporal context also function as system inputs because they shape how the three components are configured and interpreted. Taken together, these elements define a monitoring system whose performance depends on more than any single classifier or threshold. This view is consistent with operational systems such as GFM and OPERA-related DSWx-S1, where flood or water products are built through layered combinations of acquisition constraints, contextual reference information, adaptive processing logic, and refinement modules [Wagner et al., 2026, Jung et al., 2026].

4.3 Scientific and operational tensions in system design

A more critical reading of the recent literature suggests that the central design problem in SAR flood mapping is not the absence of methods, but the mismatch that often appears between methodological promise and operational uptake. The field repeatedly develops ideas that are scientifically well motivated, sometimes demonstrably effective, and yet only partially adopted in sustained production systems. That pattern is not accidental. It reflects the fact that operational pipelines are negotiated among evidence quality, latency, archive availability, computational burden, engineering overhead, and institutional maintainability. Several design choices are especially revealing because they are often treated lightly in method papers but become consequential once a system must run repeatedly under real constraints.

The first is **whether and how strongly the system should depend on change detection**. Multi-temporal SAR flood mapping has long been shown to be powerful, especially in difficult landscapes and urban settings, and broader comparative assessments confirm that change-based logic remains one of the major technical branches of the field [Landuyt et al., 2019, Li et al., 2018b]. The point is not only theoretical. Operationally oriented work such as RAPID already demonstrated how pre-event references and water-source-informed logic could be used in near-real-time flood mapping, while still exposing the practical dependence of such systems on reference availability and orderly upstream data handling [Shen et al., 2019a]. Recent operational-scale systems also acknowledge its value: GFM includes a dual-image classifier as one of its three principal algorithmic components rather than treating change detection as an afterthought [Wagner et al., 2026]. Yet the operational record is more cautious than the method literature sometimes implies. Early automated Sentinel-1 services such as the DLR chain demonstrated that single-image thresholding plus refinement could already deliver useful crisis products [Twele et al., 2016]. OPERA-related DSWx-S1 likewise adopts a single-acquisition architecture with multiple safeguards, not a mandatory pre-event pairing strategy [Jung et al., 2026]. The recent multi-source AdaI-RAPID preprint makes the trade-off especially explicit: advanced change detection is still desirable, but threshold-based initialization remains the more flexible default when one wants to support heterogeneous sensors and near-real-time deployment [Yang et al., 2024]. The lesson is slightly uncomfortable but important. Change detection is often scientifically attractive because it sharpens flood evidence, but operationally it creates a second problem: one must also guarantee sound pre-event matching, orbit compatibility, reference quality, and latency control. In practice, many services appear to judge that this extra system burden is not always worth making the whole pipeline depend on it.

The second is **how much preprocessing should live upstream, and how much should be treated as part of the flood system itself**. This issue is often handled as a background implementation detail, but real systems are shaped by it. GFM is built around Sentinel-1 IW GRD inputs in a service architecture designed for continuous flood monitoring [Wagner et al., 2026]. OPERA-related DSWx-S1, by contrast, is built on radiometrically terrain-corrected (RTC)

Sentinel-1 backscatter, which fits the broader OPERA product ecosystem and its emphasis on standardized, analysis-ready product layers [Jung et al., 2026]. That difference is not merely cosmetic. It reflects different system assumptions about where preprocessing responsibility should sit, how tightly the flood or water algorithm should couple to upstream infrastructure, and what level of product standardization the broader program is trying to maintain. The literature also shows that this choice can affect downstream mapping behavior. Comparative work in Southeast Asia, for example, found that algorithm performance can differ depending on whether Sentinel-1 inputs are processed with RTC or alternative terrain and radiometric treatments [Markert et al., 2020]. More practically, some systems treat speckle filtering as a standard prerequisite, while others avoid making it obligatory because filtering may alter the statistical behavior on which later thresholding or noise assumptions depend. Likewise, radiometric calibration, terrain normalization, geocoding, and related steps are no longer inseparable from one institutional processing chain; many now have accessible open-source implementations. This means a simplified, equivalent workflow can sometimes be absorbed into the flood system itself, allowing direct use of provider-level products such as Sentinel-1 GRD when that better matches operational need. In other words, preprocessing is not always just “before” the model. In system terms, it is often part of the model’s real architecture.

The third is **how much localization a production system can afford**. The literature has repeatedly shown that SAR flood signatures are locally conditioned by land cover, roughness, terrain, incidence geometry, and scattering regime, which means that globally fixed thresholds are rarely the whole story. This recognition underlies hierarchical split-based thresholding, local threshold transfer, and related scene-adaptive methods [Chini et al., 2017, Liang and Liu, 2020]. In that sense, the argument for localization is already won at the methodological level. The unresolved issue is how much localization a production system can afford. OPERA-related DSWx-S1 is informative here because it accepts the need for local threshold estimation, but implements it through tile-based sampling and interpolation procedures that remain simple enough for global product generation [Jung et al., 2026]. The same practical stance is visible in other operational lines: local adaptation is retained, but it is disciplined into forms that are stable, auditable, and scalable. This is a useful corrective to the tendency, common in research papers, to equate more local detail with a universally better system. In production, local adaptation only helps if it does not create a new fragility in tuning, transfer, or maintenance.

A fourth example is the **limited operational uptake of deep learning and machine learning**. On the research side, progress has been real. Studies now demonstrate unsupervised or weakly supervised large-scale flood segmentation, urban-aware networks that incorporate coherence, and steadily improving benchmark performance on curated SAR flood datasets [Jiang et al., 2021, Zhao et al., 2022, Schmitt et al., 2022]. At the same time, these studies also reveal why the operational transition has been slower than the publication rate. Benchmark gains are often measured against a reference processing chain under controlled data assumptions, not against the full burden of always-on service operation [Schmitt et al., 2022]. Training and transfer still depend heavily on dataset design, label quality, domain coverage, and sensor consistency, as illustrated by benchmark datasets such as Sen1Floods11 [Bonafilia et al., 2020]. More fundamentally, recent preprint arguments have pushed the critique deeper by suggesting that some generalization limits are rooted not only in data scarcity but in SAR scattering physics itself, which constrains how cleanly supervised models can separate flood and non-flood behavior across scenes [Zhao, 2026]. Add to this the practical reality that many public-service environments remain CPU-centered and conservative in their deployment stacks, and the current operational landscape becomes easier to understand. The field is not ignoring ML and DL because it failed to notice them. It is hesitating because the detector is only one layer of the system, while the costs of reliability, explainability, retraining, and deployment are paid across the whole stack.

Taken together, these examples point to a broader review conclusion. Operational SAR flood mapping does not consistently reward the most sophisticated component in isolation. It rewards the design that best balances evidence quality, scene adaptation, data-path dependence, engineering overhead, and reproducible delivery. That is why the next question for the field should not simply be which detector is best. It should be which system design best survives contact with real data, real timelines, and real institutions.

4.4 Toward an adaptive development framework

Current operational products point directly to the need for adaptive system design. GFM is built around a specific large-scale production workflow, reference climatology, ensemble logic, and uncertainty-aware service structure [Wagner et al., 2026]. OPERA-related DSWx-S1 similarly shows that scalable mapping depends on stacked safeguards such as adaptive thresholding, dark-land suppression, fuzzy logic, and refinement modules rather than a single classification step [Jung et al., 2026]. At the same time, broader emergency response systems such as the Copernicus Emergency Management Service illustrate that flood monitoring is embedded in changing operational contexts, where forecast guidance, event prioritization, and institutional workflows shape what can be delivered and when.

The implication is straightforward. Because the relevant inputs and constraints vary across events, locations, sensors, and response settings, an effective SAR flood mapping system should be able to adjust as conditions change. In this setting, AI becomes valuable not only as a detector, but as a means to support dynamic system composition and development. The opportunity is to move from static flood-mapping pipelines toward adaptive systems that can reorganize how observations, priors, processing components, and resources are combined in real time.

Recent agent-first software engineering discussions make a similar point from outside Earth observation: once the technical components already exist, the key bottleneck often becomes how quickly humans can specify intent, structure environments, expose the right context, and build feedback loops so agents can do useful bounded work. That analogy is especially relevant here. In SAR flood monitoring, the hard part is often inventing less than selecting, adapting, implementing, validating, and maintaining the right combination of known components for the operational need at hand. An AI-agent-supported development framework therefore matters as a way to accelerate this bridging work under expert supervision. The next section grounds that claim in one distilled operational case, where interruption of an inherited workflow made the system problem impossible to ignore.

5 Case Example: Rebuilding an Operational SAR Flood Mapping Workflow

The system problem outlined in Section 4 was not hypothetical. In one recent operational setting, flood-mapping capability had been built around an on-demand workflow that depended on a heavy upstream preprocessing chain, large compute allocation, and several loosely coupled components developed over time. When a critical dependency in that chain became unavailable, routine map generation effectively stalled. The science remained, the data still arrived, and the need for flood information did not change. What failed was the system path from SAR observation to usable flood product.

The events behind this example are real, but the account is intentionally distilled. Specific internal program structures and some implementation details are omitted. The purpose is not to

dramatize a workflow accident. It is to show that once an operational interruption exposed the fragility of the inherited stack, the real problem became impossible to misread: the task was not merely to swap one algorithm for another, but to rebuild a usable flood-monitoring system under realistic data, software, timing, and resource constraints.

5.1 The operational problem

The interrupted workflow had scientific value and was rooted in genuine prior operational development. It drew from earlier near-real-time Sentinel-1 flood-monitoring efforts and from a high-resolution flood-archive framework over CONUS [Shen et al., 2019a, Yang et al., 2021]. In practical terms, however, the inherited system carried substantial operational weight. It depended on specialized preprocessing software, large memory allocation, and a service structure in which flood mapping was only one component of a broader chain. A single image run could take roughly 30 minutes to more than 2 hours from activation to flood product depending on sensor, preprocessing path, and machine conditions, often with preprocessing itself contributing major overhead. Some configurations also assumed access to cloud or server environments capable of assigning roughly 256 GB memory to one job. That design was workable when the full chain remained available and when event-driven, on-demand response was the dominant mode. Once the preprocessing dependency became unstable, however, the flood-mapping capability inherited that instability.

This exposed the actual problem to be solved. The central issue was not simply efficiency in the narrow computational sense. It was resumability. How could operational flood mapping be restored quickly and robustly under the data formats, software constraints, resource limits, and time expectations that actually governed the environment? The available SAR inputs were heterogeneous C-band products with varying formats and resolutions. Some data pathways imposed handling restrictions. Upstream standardization could no longer be assumed. The inherited system had enough moving parts that when one critical component failed, the whole operational path became difficult to resume.

From a system-design perspective, several requirements followed immediately. The new baseline needed to work directly with more accessible provider-level inputs, minimize dependence on fragile upstream services, reduce runtime and memory burden, retain enough physical and hydrologic logic to remain trustworthy, and transfer across multiple C-band sources rather than one narrowly tuned sensor pathway. In short, the task was to rebuild the flood-mapping stack around what the operation actually needed, rather than around what the previous workflow happened to require.

5.2 SIENA as a human-supervised AI architect

The rebuild was carried out through an AI-agent-assisted research and development framework referred to here as SIENA. In this context, “agent” is too weak a description. SIENA functioned more usefully as an *architect*. That term is intentional. Practical flood-system development resembles architectural design more than isolated algorithm tuning. The final structure must satisfy physical principles, numerical logic, data characteristics, machine limits, policy constraints, user needs, and operational timing, while still remaining coherent enough to be maintained.

As illustrated in Figure 1, SIENA is treated here as an AI-agent architect framework that strengthens the research and development loop for near-real-time multi-source SAR flood modeling, including flood inundation mapping, refined flood-depth estimation, change detection in obscured areas, and both global baseline and localized model configurations. In the work reported here, the agent-development environment relied primarily on OpenClaw and Cursor as interactive AI-assistance tools. For the OpenClaw-assisted portions described here, the principal model en-

vironment was OpenAI Codex GPT-5.4; Cursor functioned as an interactive coding environment rather than as a separately benchmarked scientific component. These tools were used to help organize literature and workflow context, generate and revise code, compare implementation pathways, document logic, and accelerate repeated rounds of testing and restructuring. The scientific framing of the problem, acceptance criteria, hydrologic interpretation, and final judgment of what was scientifically defensible remained under human control.

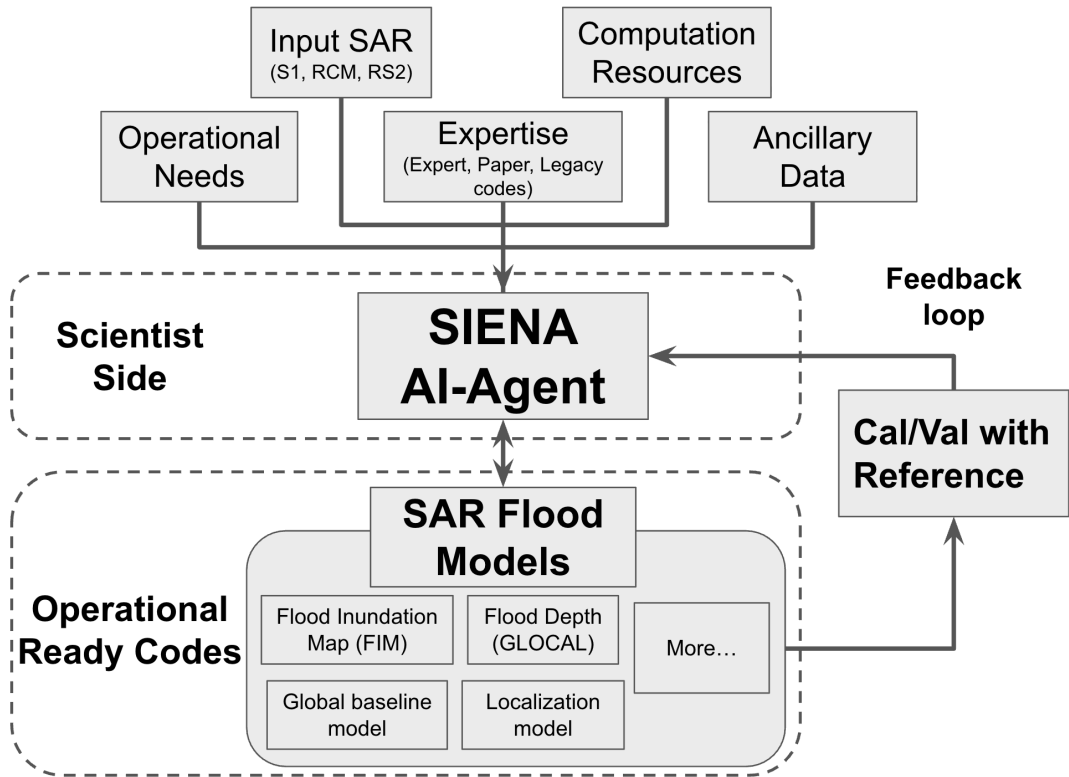


Figure 1: Framework diagram of SIENA (Scientific Inundation Evolution Network Agent for SAR), an AI-agent framework for multi-sensor C-band SAR flood model development and calibration/validation. SIENA integrates SAR observations, ancillary data, scientific expertise, operational constraints, and computational resources to generate scientifically sound and operationally relevant flood-mapping configurations. This framework enables complex expert knowledge and practical system requirements to be more directly incorporated into research and transition-oriented code development.

That architectural role is also why AI becomes useful at this stage of the field. Once SAR flood mapping has accumulated decades of methods, code fragments, failure lessons, and sensor-specific experience, the bottleneck often shifts to composition: selecting what should remain, what should be simplified, what should move into the model itself, and what should be removed. SIENA was used to strengthen that composition loop under scientist oversight. Prior operational experience, hydrologic reasoning, legacy code logic, published methods, sensor knowledge, and deployment constraints were organized into a faster cycle of implementation, testing, iteration, and reimplementation.

The design philosophy that emerged was well captured by the modernist principle that “less is more.” In this case, the phrase does not mean simplification for its own sake, nor does it diminish the value of earlier work. Rather, it means identifying which components are scientifically

indispensable and which intermediate layers add operational burden without commensurate value. The rebuild therefore moved toward direct use of GRD-like inputs, lightweight open-source preprocessing in Python, automated ancillary-data handling where needed, flexible format support, and a baseline model structure organized around initialization, pixel-level detection, and object-level rule refinement. The intention was to preserve the physically meaningful kernel of the remote-sensing workflow while integrating hydrologic requirements, computer-science efficiency, actual facility availability, and policy constraints into a cleaner system.

5.3 Production implementation and current operational use

The technical consequences were substantial. Relative to the inherited heavier configuration, the rebuilt workflow reduced preprocessing dependence, lowered memory demand, and shortened time-to-product enough to change what operational modes were realistic. In its current production setting, the SIENA-generated codebase runs on the University of Maryland HPC system **Zaratan**. The standard Zaratan compute nodes are AMD Zen3 nodes with dual AMD EPYC 7763 processors (128 cores and 512 GiB memory per node), while the routine SIENA tasks described here are typically configured at the job level around 1 CPU and 64 GB memory for downloading, preprocessing, SIENA SAR flood inundation mapping, and global-plus-local (GLOCAL) flood-depth estimation. Importantly, the operational deployment is of reviewed code, scripts, and workflow artifacts generated through the SIENA development process rather than of an unconstrained live agent.

Because the rebuilt system is lighter, more self-contained, and less dependent on fragile upstream components, it became possible to move beyond interruption recovery toward routine broad-area production. In practical terms, the current workflow no longer depends on an external RTC production path as its required entry point and instead works directly from more accessible provider-level SAR inputs using lightweight open-source preprocessing. It also does not require paid or credit-gated data access for the core Sentinel-1 operational pathway described here. The production deployment currently runs on HPC, but the workflow logic is designed to remain portable across computing environments ranging from shared servers and university HPC systems to more modest workstation or laptop settings when the target domain and throughput requirements are smaller. The workflow now supports public routine production covering **CONUS and Alaska**, with updates issued several times per day and distributed as date-grouped zip archives through a public Google Drive share. That production mode is important for the present paper because it shows that the result of the AI-assisted rebuild was not merely a demonstration script. It was a working operational pipeline placed into real recurrent use.

5.4 Comparative evidence across four evaluation settings

This subsection provides a concise summary of the comparative quantitative evidence used to judge the rebuilt workflow. Detailed case descriptions, figures, metrics, caveats, and representative examples are provided in the supplementary materials. Table 1 and Figures 2–3 bring the headline comparative results directly into the main text.

Table 1: Headline comparative evidence for the SIENA case brought into the main text. Values are reported exactly as summarized from the four supporting evaluation settings, while detailed methods, caveats, and per-date or per-scene breakdowns remain in the supplement.

Setting	Comparison basis	Headline quantitative result	Main operational reading
West Coast atmospheric river	SIENA vs Algorithm A vs Algorithm B using VIIRS-FIM	Precision 0.381; recall 0.075; F1 0.125; no-flood false-alarm density 2.17×10^{-4} ; kernel runtime 2.81 min vs 5.17 and 21.89 min	SIENA occupies a deliberately conservative operating point: substantially fewer false alarms and faster kernel execution, but lower recall.
Kentucky flood event	SIENA vs NOAA ERI RGB-derived reference	Precision 0.685; recall 0.013; F1 0.026; tile wet-fraction correlation weak and interpreted cautiously	Useful as an event-level realism check, not as a primary quantitative validation anchor for flood extent.
Central Valley monitoring	SIENA vs DSWX-HLS vs VIIRS-FIM over 23 dates	Pooled F1 = 0.508 (SIENA-VIIRS), 0.753 (DSWX-HLS-VIIRS), 0.521 (SIENA-DSWX-HLS); flood-subset F1 = 0.513, 0.758, 0.526	SIENA behaves as a credible inter-product peer, but with lower flood recall than DSWX-HLS against the same optical reference.
Three flood-event DSWX-S1 study	SIENA vs DSWX-S1 vs VIIRS-FIM over Snohomish, Jackson County, and Alaska Yukon events	SIENA-VIIRS F1 = 0.598 / 0.515 / 0.025; DSWX-S1-VIIRS F1 = 0.084 / 0.387 / 0.039; SIENA-DSWX-S1 F1 = 0.287 / 0.761 / 0.386	Event behavior depends strongly on flood type: SIENA is closer to VIIRS in two events, while DSWX-S1 vegetated inundation remains scientifically important but was not scored in the open-water metrics.

The first evaluation setting was an apple-to-apple comparison of SIENA against two earlier operational code versions, here referred to as Algorithm A and Algorithm B, over the December 2025 U.S. West Coast atmospheric-river event. The comparison included 142 Sentinel-1 acquisitions spanning Seattle and part of California’s Central Valley, many of which contained little or no flood signal. This mixed set is useful precisely because an operational system must behave sensibly not only on dramatic flood scenes but also on ordinary or near-dry scenes. Against VIIRS-FIM at 375 m, SIENA showed a conservative detection regime with the highest pooled precision of the three candidates (0.381) and, more importantly for deployment, the lowest false-alarm density on no-flood scenes (2.17×10^{-4}). On the 29 no-flood scenes in the evaluation set, SIENA was the only candidate that remained effectively silent at the chosen operating point, whereas Algorithms A and B produced substantially larger false-alarm activity. The same case also provided a direct runtime comparison on the same HPC environment for the Sentinel-1 SAR kernel-processing stage only: SIENA had a median runtime of 2.81 minutes per granule, compared with 5.17 minutes for Algorithm B and 21.89 minutes for Algorithm A. These kernel-only timings should not be interpreted as end-to-end workflow comparisons, because the legacy workflows depend on RTC availability from external production pathways that are not directly comparable to the present GRD-based SIENA production chain. This case therefore justifies a narrow but operationally important claim: SIENA currently favors precision and operational silence over aggressive flood recall. That trade-off is intentional at the present operating point, because in a routine continental workflow false alarms can rapidly erode analyst trust and downstream usability. At the same time, the low recall values show that this operating point is conservative and should be understood as

510 tunable rather than universally optimal.

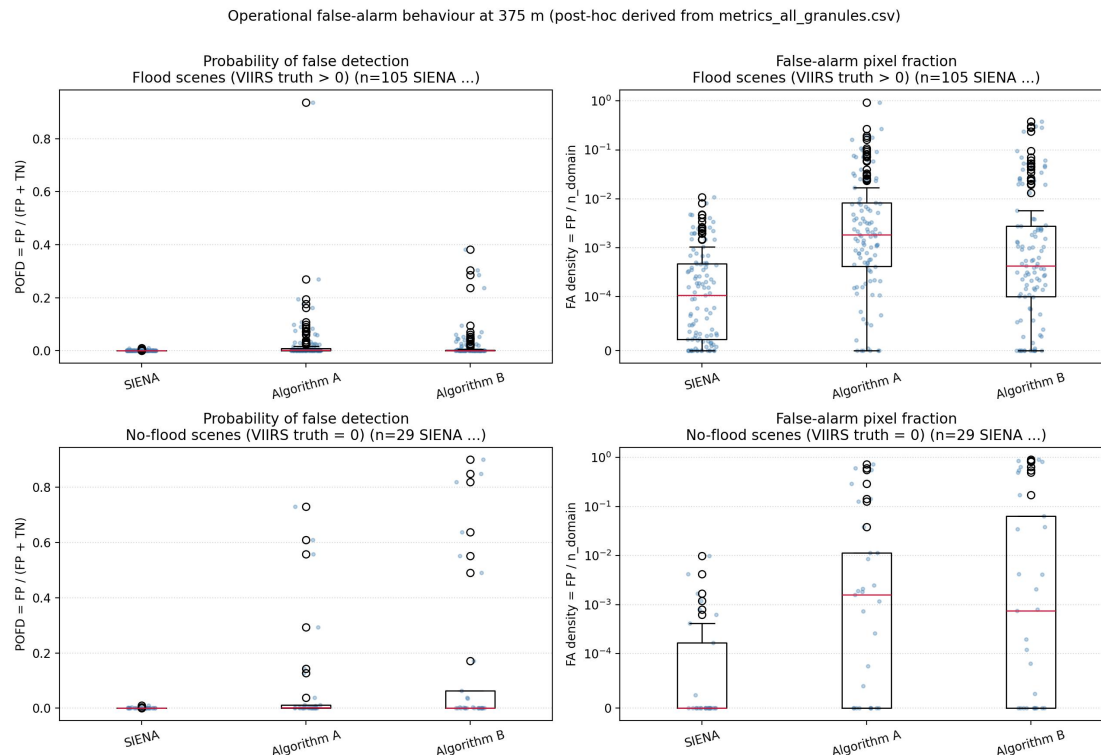


Figure 2: Main-text evidence figure from the West Coast comparison. This false-alarm summary is included here because it captures the most operationally important separation among the three candidate workflows: SIENA remained nearly silent on no-flood scenes at the chosen operating point, whereas the two legacy workflows did not.

511 The second evaluation setting compared SIENA with NOAA Emergency Response Imagery
 512 (ERI) collected during the April 2025 Kentucky flood. This case is important because it brings in
 513 a very high resolution airborne reference rather than another moderate-resolution flood product.
 514 The ERI product is RGB imagery rather than a native flood label, so binary pixel-level skill scores
 515 are not fully reliable owing to muddy floodwater and bare-ground confusion in RGB space. For
 516 that reason, the main quantitative statement for this case is the per-tile area-fraction agreement
 517 between SIENA wet fraction and ERI-derived water-like fraction, supplemented by curated visual
 518 tiles. Within the joint valid domain, the pooled pixel-level precision of SIENA relative to the
 519 ERI-derived mask was 0.685, indicating substantial spatial co-location of SIENA detections with
 520 low-brightness airborne water-like features. However, the event's weak tile-fraction relationship
 521 and very low binary recall argue against treating Kentucky as a co-equal quantitative pillar of the
 522 paper.

523 The third evaluation setting examined a fixed Central Valley, California region through the
 524 winter 2025–2026 monitoring period and compared SIENA with NASA OPERA DSWX-HLS and
 525 NOAA VIIRS-FIM. This case addresses a different question from the first two: not acute event
 526 comparison alone, but continuity of operational monitoring over a multi-date regional domain.
 527 Across 23 dates with three-product coverage, pooled F1 values were 0.508 for SIENA versus VIIRS-
 528 FIM, 0.753 for DSWX-HLS versus VIIRS-FIM, and 0.521 for SIENA versus DSWX-HLS. Within
 529 the 14-date subset containing at least 1% wet area in the joint valid domain, the corresponding

pooled F1 values were 0.513, 0.758, and 0.526. These numbers do not imply that the three products are interchangeable. They show more specifically that SIENA occupies a lower-recall, lower-false-alarm regime than DSWX-HLS against the same optical reference, while still remaining within a scientifically interpretable inter-product comparison range.

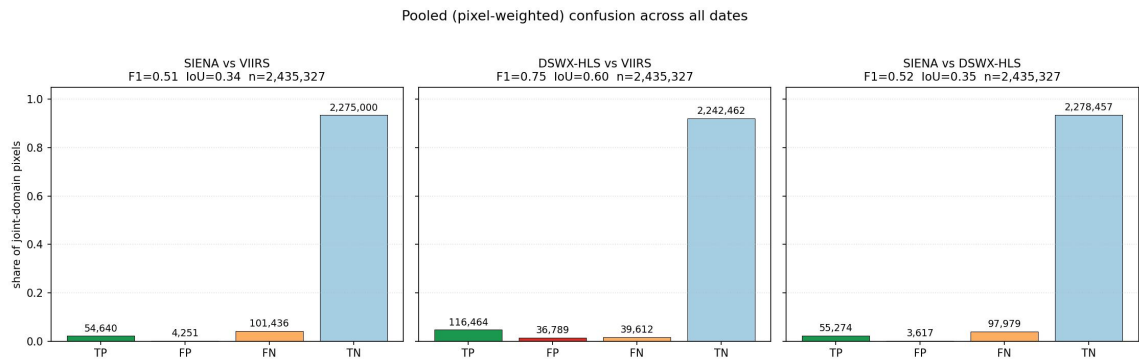


Figure 3: Main-text evidence figure from the Central Valley comparison. The pooled confusion-share summary is carried into the main article so the reader can directly see how SIENA, DSWX-HLS, and VIIRS differ in wet-pixel agreement rather than encountering only headline F1 values in prose.

The fourth evaluation setting is an event-based comparison. It evaluates SIENA, DSWx-S1, and NOAA VIIRS-FIM over three representative flood episodes: the December 2025 Snohomish River event near Seattle, the March 2026 Jackson County, Indiana event, and the May 2026 Alaska Yukon River event. The scoring uses VIIRS-FIM as the optical reference at 375 m and counts DSWx-S1 open water only (class 1) in the quantitative metrics, while still showing inundated vegetation (class 3) qualitatively because SIENA does not yet output a comparable class. The event results are intentionally heterogeneous. In Snohomish, SIENA was much closer to VIIRS than DSWx-S1 open water (pooled F1 0.598 vs 0.084). In Jackson County, both SAR products were reasonably consistent, but SIENA again aligned somewhat better with VIIRS (0.515 vs 0.387). In Alaska Yukon, both open-water products showed low recall against VIIRS, while DSWx-S1's visible inundated-vegetation signal suggests a scientifically important capability gap still to be addressed in SIENA.

Supplementary Table S1 summarizes the four comparative evaluation settings. Supplementary Tables S2–S4 report the West Coast, Kentucky, and runtime summaries. Supplementary Tables S5–S7 report the Central Valley inter-product metrics and flood-rich dates. Supplementary Tables S8–S10 report the Case 4 event windows and pooled event metrics. Supplementary Figures S1–S4 show the West Coast comparison, Supplementary Figures S5–S16 show the Kentucky comparison, Supplementary Figures S17–S29 show the Central Valley comparison, and Supplementary Figures S30–S32 show the three Case 4 event composites.

5.5 Interpretation, scope, and significance

Taken together, the four comparisons provide a more grounded view of what the rebuild accomplished. They do not show that SIENA is universally superior under all conditions, and this paper is not intended as a completed benchmark-validation study across all flood environments. Instead, they show that the rebuilt workflow can be examined from four complementary angles: comparison with earlier operational code, comparison with an airborne event reference, comparison with

established institutional products over sustained monitoring, and event-based comparison with DSWx-S1.

The evidence also clarifies the type of improvement being claimed. One part is computational and operational: lighter preprocessing, lower resource demand, faster turnaround, and realistic support for routine CONUS+Alaska production. Another part is behavioral: across all four evaluation settings, the rebuilt SIENA workflow occupied a conservative operating regime that strongly reduced false alarms and over-extension, while also making clear that flood recall remains comparatively limited at the current operating point. A third part is organizational: AI-agent-assisted development compressed the cycle linking prior literature, legacy code, operational constraints, implementation, testing, and redesign. These advantages do not remove the need for continued calibration, hydrologic scrutiny, or broader validation, but they do show that AI-assisted system rebuilding can produce a scientifically serious and operationally functioning flood-monitoring pipeline.

6 Discussion and Outlook

The case example shows what the broader argument of this paper looks like in practice: once an inherited workflow is treated as a design object rather than a fixed container, interruption can become an opportunity for rebuilding. That point, however, should not be overstated. SAR flood mapping remains difficult because the physics, the empirical behavior of real scenes, the structure of available data, and the constraints of operations do not align neatly. AI-agent systems do not remove those difficulties. What they can do is change the rate at which a scientifically grounded system can be assembled, tested, revised, and matured.

The additional comparative evidence summarized in Section 5 makes that point more concrete. The SIENA case is no longer supported only by a single narrative account. It is now examined through four different comparison settings: an operational batch comparison against earlier implemented workflows, an airborne emergency-response imagery comparison for one flood event, a multi-date regional comparison against established institutional products, and an event-based comparison against DSWX-S1. Those analyses do not convert the present paper into a universal benchmark study, but they do shift the case from a promising anecdote toward a more disciplined operational account, with the underlying metrics and representative examples documented in Supplementary Tables S2–S10 and Supplementary Figures S1–S29.

6.1 Physics, empiricism, and AI-enabled flood mapping

One recurring debate in SAR flood mapping, and more broadly in remote-sensing flood mapping, concerns the relationship between physics-based reasoning and empirical practice. In reality, operational methods have almost always contained both. Some components remain stable because long experience has shown that they are broadly robust. Others emerge from repeated empirical calibration, case-based adjustment, or practical routines that later become accepted parts of the workflow. Even methods often presented as more objective or rule-based still contain this mixture. For example, operational systems such as OPERA DSWx-S1 rely on predefined segmentation thresholds, fuzzy-logic design choices, and fixed acceptance or rejection rules for candidate water bodies, all of which reflect accumulated expert practice as much as formal theory.

This is why the opposition between “physics” and AI is often overstated. Early machine-learning and deep-learning studies in flood mapping were frequently criticized for not producing operational-ready systems, but many of those studies were not trying to do so. They were proof-of-concept efforts, and they successfully demonstrated that some kernel algorithmic tasks could be learned in

a more data-driven way. If such approaches eventually mature into operational systems and survive broad evaluation, then they too will contain a large amount of what practitioners informally call physics: not necessarily in the form of hand-written equations alone, but as stable knowledge distilled through repeated interaction with data, errors, and validation. After all, theory alone can only take the field so far; robust operational knowledge must also be shaped by new data, failure cases, validation exercises, and real-world constraints.

The same pattern appears in AI-agent-assisted development. During interactive research and development, new physically meaningful logic can emerge through implementation, calibration and validation against existing operational products, and comparison with event evidence or survey-based truth. Some of that knowledge is already known to experts but becomes newly organized; some of it is made more explicit through the agent workflow; and some may even refresh the scientist's own understanding. The practical implication is simply that AI-assisted development should not be treated as inherently opposed to physically grounded flood science. In many cases, it becomes another setting in which empirical practice, expert judgment, and operational testing are translated into stable system logic.

The case in Section 5 helps make this point concrete. The rebuild did not succeed by abandoning remote-sensing logic in favor of unconstrained automation. It succeeded by simplifying the stack while preserving the physically meaningful kernel, then accelerating implementation and iterative improvement within that boundary. The comparative results also suggest that this bounded strategy can produce a useful operating point: SIENA was not the most aggressive detector in the West Coast comparison, but it was the most operationally disciplined one when no-flood scenes were included, and it remained broadly consistent with airborne and institutional references in the other two settings.

6.2 Validation scope and what is being claimed

The paper also benefits from saying clearly what is and is not being claimed. The present paper does not claim that four case studies resolve the full validation problem for SAR flood mapping. They do not. Cross-sensor temporal mismatch, scale mismatch between 30 m and 375 m products, and limitations of heuristic reference masks all remain important caveats. Nor do we claim that all forms of flood-detection quality can be reduced to one pooled metric. In fact, one lesson of the evidence package is that different comparisons answer different questions. The VIIRS-based West Coast case is particularly useful for testing operational silence and false-alarm behavior. The NOAA ERI case is useful for checking event realism against a high-resolution airborne reference, but only with careful caveats about RGB-only flood separability. The Central Valley case is useful for sustained inter-product comparison across a fixed region and season. The DSWX-S1 event case is useful for judging how SIENA behaves against a peer SAR-based institutional product across distinct flood settings, while also making clear that class-definition differences such as inundated vegetation remain important.

What the case package does support is a narrower but still important conclusion: the SIENA rebuild is operationally real, scientifically inspectable, and meaningfully evidenced. In other words, the contribution is not that AI somehow solved flood mapping in the abstract. It is that an AI-agent-assisted, human-supervised development process produced a functioning end-to-end flood pipeline that can be compared against legacy workflows, event evidence, and established operational products.

6.3 Security, governance, and controlled deployment

A third discussion point concerns security. One concern is scientific security: could an AI-agentic workflow drift away from physically sensible reasoning and produce outputs that appear polished but are scientifically unsound? That risk is real, but it is manageable. Scientist supervision remains the first safeguard. Boundary-condition control, constrained tooling, and calibration and validation against external references remain additional safeguards. In other words, AI does not remove the need for scientific discipline; it increases the importance of explicit scientific control.

A second concern is institutional or computational security. In principle, an unconstrained agent could misuse compute resources, exceed data quotas, interfere with shared systems, or modify files it should not touch. In practice, these risks can be limited through ordinary governance mechanisms: permission management, sandboxed execution, scoped credentials, approval gates for sensitive actions, and agency or university software standards for any code that moves toward operational use. A particularly important distinction in the present case is that operational deployment does not involve shipping the live agent itself into production. The reviewed code, scripts, workflow logic, and model artifacts generated during the development process are what run on the production HPC environment. That separation helps preserve many of the advantages of AI-assisted R&D while keeping operational behavior within familiar software-governance boundaries.

6.4 Outlook: research, training, and collaboration

The longer-term outlook is broader than coding assistance alone. As AI-agent systems improve in memory, tool use, and scientific continuity, it becomes plausible to organize them into managed research teams that help carry larger portions of the R&D process: literature synthesis, implementation, testing, documentation, benchmarking, and redesign. That does not imply removing scientists from the loop. It suggests that scientists may increasingly act as directors of AI-accelerated research programs rather than sole executors of every technical step.

Examples from adjacent scientific and technical domains already hint at what such a transition could look like. Systems such as ChemCrow and Coscientist have shown how language-centered agents can be coupled to external tools, structured retrieval, planning steps, and iterative execution in order to support bounded scientific work, while AutoGen-style multi-agent frameworks illustrate how more complex orchestration can be distributed across specialized roles [Bran et al., 2023, Boiko et al., 2023, Wu et al., 2024]. For flood mapping, the most useful lesson is not generic autonomy, but the value of carefully constrained tool use: data discovery, preprocessing control, benchmark assembly, uncertainty checks, quality screening, product summarization, and reproducible documentation.

This possibility also has implications for education and collaboration. A well-trained SAR flood system architect such as SIENA could help teach students, onboard early-career scientists, answer technical questions, and support cross-team discussion at a level that is difficult to scale through human mentoring alone. Looking further ahead, one can imagine broader scientific ecosystems in which institutional AI interfaces help researchers navigate data systems, product logic, computational services, and calibration resources more efficiently than is common today. Whether or not that broader ecosystem arrives soon, the near-term implication is already clear: AI-agent systems can extend scientific capacity across research, operations, and training if they are developed with sound memory, careful oversight, and respect for the field's accumulated knowledge.

Taken together, these points suggest a more practical agenda for the field. The relevant questions are not only whether AI can contribute, but under what conditions it contributes usefully: how it should be constrained, how it should be validated, what parts of the workflow it should

accelerate, and how it can support research, operations, and training without weakening scientific or institutional discipline. Those broader implications are taken up in the concluding section.

7 Conclusion

This paper argues that SAR flood mapping should now be understood less as the search for one more isolated detector and more as the development of operational systems that must work under real constraints. Algorithm design, preprocessing, ancillary data, computing environment, refinement logic, validation, and deployment have become too entangled to be treated as separate concerns if the goal is a usable flood product.

From that perspective, the manuscript advanced three connected points. First, recent operational systems and literature show that SAR flood mapping is fundamentally a full-stack systems problem rather than a detector-only problem. Second, the SIENA case showed that when an inherited workflow is interrupted, progress may come less from adding new complexity than from rebuilding the stack around what is scientifically necessary and operationally sustainable. Third, the discussion argued that AI-agent-assisted development is best understood as a practical addition to a field that has always depended on some mixture of physical reasoning, empirical adjustment, engineering judgment, and iterative validation.

The SIENA case is not presented only as a narrative rebuild story. It is supported by four structured comparative settings: comparison against earlier implemented operational workflows, comparison against NOAA emergency-response airborne imagery, multi-date comparison against established institutional flood and surface-water products, and event-based comparison against DSWX-S1. Together with routine public production over CONUS and Alaska, these materials show that the AI-assisted rebuild produced not only code, but a functioning operational pipeline.

The broader implication is that this line of work is inherently multidisciplinary. Radar physics matters, hydrologic reasoning matters, statistics matter, software architecture matters, operational constraints matter, and user-facing reliability matters. None of these alone is the field. The purpose of the system is not to preserve any one disciplinary preference in isolation, but to turn available knowledge, tools, and resources into a product that can be trusted when flood decisions must be made.

The central shift is therefore simple. The field should ask not only how to build a better flood algorithm, but how to build a better flood monitoring system for the need at hand, and how to keep improving it as conditions change. In that sense, physics, mathematics, remote sensing, hydrology, computing, AI, and human oversight are not competing ends in themselves, but instruments to be judged by how well they serve the field's central tenet: timely and trustworthy flood monitoring.

Data, code, and AI-use availability

Representative routine SIENA production outputs over CONUS and Alaska are publicly shared through a Google Drive archive organized as date-grouped zip files: https://drive.google.com/drive/folders/1FOCIJxbiSSTJyViN0cZHk8pth8aN6kRA?usp=drive_link. The evaluation results and the code used to generate the comparative analyses described in this study are publicly archived at Zenodo: <https://zenodo.org/records/20420859>. The detailed comparative figures and structured evaluation summaries are also included in the supplementary materials. The archive is intentionally narrower than a full release of the SIENA operational codebase: it contains the evaluation workflows, analysis scripts, plotting utilities, and derived summaries behind the manuscript comparisons, but it does not contain the full SIENA production system, all agent configurations, or a

one-command reproduction of the entire operational pipeline.

The external comparison products used in this study are publicly accessible from their respective provider services. OPERA DSWX-HLS is available through PO.DAAC at https://podaac.jpl.nasa.gov/dataset/OPERA_L3_DSWX-HLS_V1 and is associated with the broader DSWE/DSWX methodological lineage including Jones [2019]. DSWX-S1 is also available through PO.DAAC at https://podaac.jpl.nasa.gov/dataset/OPERA_L3_DSWX-S1_V1. VIIRS Flood Inundation Mapping products are publicly available from NOAA at https://noaa-jpss.s3.amazonaws.com/?list-type=2&prefix=JPSS_Blended_Products/VFM_1day_GLB/TIF and are described by Li et al. [2018a]. NOAA Emergency Response Imagery used for the Kentucky flood comparison is accessible through the NOAA NGS imagery portal at <https://storms.ngs.noaa.gov/>.

For the work reported here, AI was used in two distinct ways. First, AI-assisted development tools, primarily OpenClaw and Cursor, were used during research and development to help generate, revise, document, and restructure code, scripts, and workflow logic under human supervision. For the OpenClaw-assisted portions documented here, the principal model environment was OpenAI Codex GPT-5.4. Cursor was used as an interactive coding environment, but its provider routing is not treated here as a controlled experimental variable. Second, AI may also have been used in limited ways to assist manuscript editing and language refinement. In both cases, the scientific framing, interpretation, validation decisions, and final approval remained under human control.

The operational workflow currently placed in production is not an unconstrained live AI-agent. It is the reviewed code, workflow logic, and model artifacts produced through the SIENA development process and executed under standard HPC and institutional controls.

References

- Donato Amitrano, Gerardo Di Martino, Alessio Di Simone, and Pasquale Imperatore. Flood detection with sar: A review of techniques and datasets. *Remote Sensing*, 16(4):656, February 2024. ISSN 2072-4292. doi: 10.3390/rs16040656. URL <http://dx.doi.org/10.3390/rs16040656>.
- P. D. Bates, M. S. Horritt, C. N. Smith, and D. Mason. Integrating remote sensing observations of flood hydrology and hydraulic modelling. *Hydrological Processes*, 11(14):1777–1795, 1997. doi: 10.1002/(SICI)1099-1085(199711)11:14<1777::AID-HYP543>3.0.CO;2-E. URL [https://doi.org/10.1002/\(SICI\)1099-1085\(199711\)11:14<1777::AID-HYP543>3.0.CO;2-E](https://doi.org/10.1002/(SICI)1099-1085(199711)11:14<1777::AID-HYP543>3.0.CO;2-E).
- Bernhard Bauer-Marschallinger, Senmao Cao, Mark Edwin Tupas, Florian Roth, Christian Briebe, and Wolfgang Wagner. Satellite-based flood mapping through bayesian inference from a sentinel-1 sar datacube. *Remote Sensing*, 14(15):3673, 2022. doi: 10.3390/rs14153673. URL <https://doi.org/10.3390/rs14153673>.
- Daniil A. Boiko, Robert MacKnight, Ben Kline, and Gabe Gomes. Autonomous chemical research with large language models. *Nature*, 624(7988):66–73, 2023. doi: 10.1038/s41586-023-06792-0. URL <https://doi.org/10.1038/s41586-023-06792-0>.
- Derrick Bonafilia, Beth Tellman, Tyler Anderson, and Erica Issenberg. Sen1floods11: a georeferenced dataset to train and test deep learning flood algorithms for sentinel-1. In *2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, pages 210–211, 2020. doi: 10.1109/CVPRW50498.2020.00113. URL <https://doi.org/10.1109/CVPRW50498.2020.00113>.
- Andres M. Bran, Sam Cox, Andrew D. White, and Philippe Schwaller. Chemcrow: Augmenting large-language models with chemistry tools, 2023. URL <https://arxiv.org/abs/2304.05376>.

- Marco Chini, Renaud Hostache, Ludovic Giustarini, and Patrick Matgen. A hierarchical split-based approach for parametric thresholding of sar images: Flood inundation as a test case. *IEEE Transactions on Geoscience and Remote Sensing*, 55(12):6975–6988, 2017. doi: 10.1109/TGRS.2017.2737664. URL <https://doi.org/10.1109/TGRS.2017.2737664>.
- Sandrine Delmeire. Use of ers-1 data for the extraction of flooded areas. *Hydrological Processes*, 11(10):1393–1398, 1997. doi: 10.1002/(SICI)1099-1085(199708)11:10<1393::AID-HYP528>3.0.CO;2-N. URL [https://doi.org/10.1002/\(SICI\)1099-1085\(199708\)11:10<1393::AID-HYP528>3.0.CO;2-N](https://doi.org/10.1002/(SICI)1099-1085(199708)11:10<1393::AID-HYP528>3.0.CO;2-N).
- Ludovic Giustarini, Renaud Hostache, Dmitri Kavetski, Marco Chini, Gianpaolo Corato, Stefan Schlaffer, and Patrick Matgen. Probabilistic flood mapping using synthetic aperture radar data. *IEEE Transactions on Geoscience and Remote Sensing*, 54(12):6958–6969, 2016. doi: 10.1109/TGRS.2016.2592951. URL <https://doi.org/10.1109/TGRS.2016.2592951>.
- Salvatore Grimaldi, Jingming Xu, Yu Li, Valentijn R.N. Pauwels, and Jeffrey P. Walker. Flood mapping under vegetation using single sar acquisitions. *Remote Sensing of Environment*, 237:111582, 2020. doi: 10.1016/j.rse.2019.111582. URL <https://doi.org/10.1016/j.rse.2019.111582>.
- Xin Jiang, Shijing Liang, Xinyue He, Alan D. Ziegler, Peirong Lin, Ming Pan, Dashan Wang, Junyu Zou, Dalei Hao, Ganquan Mao, Yelu Zeng, Jie Yin, Lian Feng, Chiyuan Miao, Eric F. Wood, and Zhenzhong Zeng. Rapid and large-scale mapping of flood inundation via integrating spaceborne synthetic aperture radar imagery with unsupervised deep learning. *ISPRS Journal of Photogrammetry and Remote Sensing*, 178:36–50, August 2021. ISSN 0924-2716. doi: 10.1016/j.isprsjprs.2021.05.019. URL <http://dx.doi.org/10.1016/j.isprsjprs.2021.05.019>.
- John W. Jones. Improved automated detection of subpixel-scale inundation—revised dynamic surface water extent (dswe) partial surface water tests. *Remote Sensing*, 11(4):374, 2019. doi: 10.3390/rs11040374. URL <https://doi.org/10.3390/rs11040374>.
- Jungkyo Jung, Heresh Fattahi, Seongsu Jeong, Matthew G. Bonnema, John W. Jones, David Bekaert, Steven K. Chan, and Alexander L. Handwerger. Towards global mapping of dynamic surface water extents using sentinel-1 sar data. *Remote Sensing of Environment*, 337:115326, May 2026. doi: 10.1016/j.rse.2026.115326. URL <https://doi.org/10.1016/j.rse.2026.115326>.
- Lore Landuyt, Adrien Van Wesemael, Guy J.-P. Schumann, Renaud Hostache, Niko E.C. Verhoest, and Fieke M.B. Van Coillie. Flood mapping based on synthetic aperture radar: An assessment of established approaches. *IEEE Transactions on Geoscience and Remote Sensing*, 57(9):7222–7237, 2019. doi: 10.1109/TGRS.2018.2860054. URL <https://doi.org/10.1109/TGRS.2018.2860054>.
- Sanmei Li, Donglian Sun, Mitchell D. Goldberg, Bill Sjöberg, David Santek, Jay P. Hoffman, Mike DeWeese, Pedro Restrepo, Scott Lindsey, and Eric Holloway. Automatic near real-time flood detection using suomi-npp/viirs data. *Remote Sensing of Environment*, 204:672–689, 2018a. doi: 10.1016/j.rse.2017.09.032. URL <https://doi.org/10.1016/j.rse.2017.09.032>.
- Yu Li, Sandro Martinis, Simon Plank, and Ralf Ludwig. An automatic change detection approach for rapid flood mapping in sentinel-1 sar data. *International Journal of Applied Earth Observation and Geoinformation*, 73:123–135, December 2018b. ISSN 1569-8432. doi: 10.1016/j.jag.2018.05.023. URL <http://dx.doi.org/10.1016/j.jag.2018.05.023>.

- Jiayong Liang and Desheng Liu. A local thresholding approach to flood water delineation using sentinel-1 sar imagery. *ISPRS Journal of Photogrammetry and Remote Sensing*, 159:53–62, 2020. doi: 10.1016/j.isprsjprs.2019.10.017. URL <https://doi.org/10.1016/j.isprsjprs.2019.10.017>.
- Kel N. Markert, Amy M. Markert, Thomas Mayer, Christopher Nauman, A. Haag, Ate Poortinga, Barsha Bhandari, Nir S. Thwal, Tanawat Kunlamai, and Faraz Chishtie. Comparing sentinel-1 surface water mapping algorithms and radiometric terrain correction processing in southeast asia utilizing google earth engine. *Remote Sensing*, 12(15):2469, 2020. doi: 10.3390/rs12152469. URL <https://doi.org/10.3390/rs12152469>.
- S. Martinis, A. Twele, and S. Voigt. Towards operational near real-time flood detection using a split-based automatic thresholding procedure on high resolution terrasar-x data. *Natural Hazards and Earth System Sciences*, 9(2):303–314, 2009. doi: 10.5194/nhess-9-303-2009. URL <https://doi.org/10.5194/nhess-9-303-2009>.
- Sandro Martinis, Jens Kersten, and André Twele. A fully automated terrasar-x based flood service. *ISPRS Journal of Photogrammetry and Remote Sensing*, 104:203–212, 2015a. doi: 10.1016/j.isprsjprs.2014.07.014. URL <https://doi.org/10.1016/j.isprsjprs.2014.07.014>.
- Sandro Martinis, Claudia Kuenzer, Anna Wendleder, Johannes Huth, André Twele, Andreas Roth, and Stefan Dech. Comparing four operational sar-based water and flood detection approaches. *International Journal of Remote Sensing*, 36(13):3519–3543, 2015b. doi: 10.1080/01431161.2015.1060647. URL <https://doi.org/10.1080/01431161.2015.1060647>.
- Patrick Matgen, Guy Schumann, Jean-Baptiste Henry, Lucien Hoffmann, and Laurent Pfister. Integration of sar-derived river inundation areas, high-precision topographic data and a river flow model toward near real-time flood management. *International Journal of Applied Earth Observation and Geoinformation*, 9(3):247–263, 2007. doi: 10.1016/j.jag.2006.03.003. URL <https://doi.org/10.1016/j.jag.2006.03.003>.
- Patrick Matgen, Renaud Hostache, Guy Schumann, Laurent Pfister, Lucien Hoffmann, and Hubert H.G. Savenije. Towards an automated sar-based flood monitoring system: Lessons learned from two case studies. *Physics and Chemistry of the Earth, Parts A/B/C*, 36(7–8):241–252, 2011. doi: 10.1016/j.pce.2010.12.009. URL <https://doi.org/10.1016/j.pce.2010.12.009>.
- R. Oberstadler, H. H”onsch, and D. Huth. Assessment of the mapping capabilities of ers-1 sar data for flood mapping: a case study in germany. *Hydrological Processes*, 11(10):1415–1425, 1997. doi: 10.1002/(SICI)1099-1085(199708)11:10<1415::AID-HYP532>3.0.CO;2-2. URL [https://doi.org/10.1002/\(SICI\)1099-1085\(199708\)11:10<1415::AID-HYP532>3.0.CO;2-2](https://doi.org/10.1002/(SICI)1099-1085(199708)11:10<1415::AID-HYP532>3.0.CO;2-2).
- Jean-François Pekel, Andrew Cottam, Noel Gorelick, and Alan S. Belward. High-resolution mapping of global surface water and its long-term changes. *Nature*, 540(7633):418–422, 2016. doi: 10.1038/nature20584. URL <https://doi.org/10.1038/nature20584>.
- Luca Pulvirenti, Nazzareno Pierdicca, Marco Chini, and Luca Guerriero. An algorithm for operational flood mapping from synthetic aperture radar (sar) data using fuzzy logic. *Natural Hazards and Earth System Sciences*, 11(2):529–540, 2011. doi: 10.5194/nhess-11-529-2011. URL <https://doi.org/10.5194/nhess-11-529-2011>.

- Luca Pulvirenti, Giuseppe Squicciarino, Elisabetta Fiori, Luca Ferraris, and Silvia Puca. A tool for pre-operational daily mapping of floods and permanent water using sentinel-1 data. *Remote Sensing*, 13(7):1342, April 2021. ISSN 2072-4292. doi: 10.3390/rs13071342. URL <http://dx.doi.org/10.3390/rs13071342>.
- Peter Salamon, Niall Mctormick, Christopher Reimer, Tom Clarke, Bernhard Bauer-Marschallinger, Wolfgang Wagner, Sandro Martinis, Candace Chow, Christian Bohnke, Patrick Matgen, Marco Chini, Renaud Hostache, Luca Molini, Elisabetta Fiori, and Andreas Walli. The new, systematic global flood monitoring product of the copernicus emergency management service. In *2021 IEEE International Geoscience and Remote Sensing Symposium IGARSS*, page 1053–1056. IEEE, July 2021. doi: 10.1109/igarss47720.2021.9554214. URL <http://dx.doi.org/10.1109/igarss47720.2021.9554214>.
- Michael Schmitt, Marc Wieland, Burcea Wessel, Anirudh Prakash, Xiao Xiang Zhu, and Sandro Martinis. Sentinel-1-based water and flood mapping: Benchmarking convolutional neural networks against an operational rule-based processing chain. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 15:5079–5093, 2022. doi: 10.1109/JSTARS.2022.3152127. URL <https://doi.org/10.1109/JSTARS.2022.3152127>.
- Guy Schumann, Paul D. Bates, Matthew S. Horritt, Patrick Matgen, and Florian Pappenberger. Progress in integration of remote sensing-derived flood extent and stage data and hydraulic models. *Reviews of Geophysics*, 47(4):RG4001, 2009. doi: 10.1029/2008RG000274. URL <https://doi.org/10.1029/2008RG000274>.
- Guy J.-P. Schumann and Delwyn K. Moller. Microwave remote sensing of flood inundation. *Physics and Chemistry of the Earth, Parts A/B/C*, 83–84:84–95, 2015. doi: 10.1016/j.pce.2015.05.002. URL <https://doi.org/10.1016/j.pce.2015.05.002>.
- Xinyi Shen, Emmanouil N. Anagnostou, George H. Allen, G. Robert Brakenridge, and Albert J. Kettner. Near-real-time nonobstructed flood inundation mapping by synthetic aperture radar. *Remote Sensing of Environment*, 221:302–315, 2019a. doi: 10.1016/j.rse.2018.11.008. URL <https://doi.org/10.1016/j.rse.2018.11.008>.
- Xinyi Shen, Dacheng Wang, Kebiao Mao, Emmanouil Anagnostou, and Yang Hong. Inundation extent mapping by synthetic aperture radar: A review. *Remote Sensing*, 11(7):879, April 2019b. ISSN 2072-4292. doi: 10.3390/rs11070879. URL <http://dx.doi.org/10.3390/rs11070879>.
- Mrinal Singha, Jinwei Dong, Sangeeta Sarmah, Nanshan You, Yan Zhou, Geli Zhang, Russell Doughty, and Xiangming Xiao. Identifying floods and flood-affected paddy rice fields in bangladesh based on sentinel-1 imagery and google earth engine. *ISPRS Journal of Photogrammetry and Remote Sensing*, 166:278–293, August 2020. ISSN 0924-2716. doi: 10.1016/j.isprsjprs.2020.06.011. URL <http://dx.doi.org/10.1016/j.isprsjprs.2020.06.011>.
- André Twele, Wenxi Cao, Simon Plank, and Sandro Martinis. Sentinel-1-based flood mapping: a fully automated processing chain. *International Journal of Remote Sensing*, 37(13):2990–3004, June 2016. ISSN 1366-5901. doi: 10.1080/01431161.2016.1192304. URL <http://dx.doi.org/10.1080/01431161.2016.1192304>.
- Wolfgang Wagner, Bernhard Bauer-Marschallinger, Florian Roth, Tobias Raiger-Stachl, Christoph Reimer, Niall McCormick, Patrick Matgen, Marco Chini, Yu Li, Sandro Martinis, Marc Wieland,

Franziska Kraft, Davide Festa, Muhammed Hassaan, Mark Edwin Tupas, Jie Zhao, Michaela Seewald, Michael Riffler, Luca Molini, Richard Kidd, Christian Briese, and Peter Salamon. The fully-automatic sentinel-1 global flood monitoring service: Scientific challenges and future directions. *Remote Sensing of Environment*, 333:115108, January 2026. doi: 10.1016/j.rse.2025.115108. URL <https://doi.org/10.1016/j.rse.2025.115108>.

Qingyun Wu, Gagan Bansal, Jieyu Zhang, Yiran Wu, Beibin Li, Erkang Zhu, Li Jiang, Xiaoyun Zhang, Shaokun Zhang, Ahmed H. Awadallah, Ryen W. White, Doug Burger, and Chi Wang. Autogen: Enabling next-gen llm applications via multi-agent conversation. *Proceedings of the First Conference on Language Modeling*, 2024. URL <https://openreview.net/forum?id=BAakY1hNKS>.

Qing Yang, Xinyi Shen, Emmanouil N. Anagnostou, Chongxun Mo, Jack R. Eggleston, and Albert J. Kettner. A high-resolution flood inundation archive (2016–the present) from sentinel-1 sar imagery over conus. *Bulletin of the American Meteorological Society*, 102(5):E1064–E1079, May 2021. ISSN 1520-0477. doi: 10.1175/bams-d-19-0319.1. URL <http://dx.doi.org/10.1175/BAMS-D-19-0319.1>.

Qing Yang, Xinyi Shen, Qingyuan Zhang, Sean Helfrich, Josef M. Kellndorfer, William Straka, Wei Hao, Nicholas C. Steiner, Tyler Ruff, Jessie C. Moore Torres, and Magaly Koch. Near-real-time flood mapping system using multi-source sar images: Adaptive initialization enhances detection in snow and arid terrains, December 2024. URL <https://doi.org/10.22541/essoar.173325269.94977422/v1>. ESS Open Archive preprint.

Bingyu Zhao. Scattering physics sets hard limits on supervised learning for sar flood mapping, 2026. URL <https://doi.org/10.2139/ssrn.6330938>. SSRN preprint.

Jie Zhao, Ramona Pelich, Renaud Hostache, Patrick Matgen, Senmao Cao, Wolfgang Wagner, and Marco Chini. Deriving exclusion maps from c-band sar time-series in support of floodwater mapping. *Remote Sensing of Environment*, 265:112668, November 2021a. ISSN 0034-4257. doi: 10.1016/j.rse.2021.112668. URL <http://dx.doi.org/10.1016/j.rse.2021.112668>.

Jie Zhao, Ramona Pelich, Renaud Hostache, Patrick Matgen, Wolfgang Wagner, and Marco Chini. A large-scale 2005–2012 flood map record derived from envisat-asar data: United kingdom as a test case. *Remote Sensing of Environment*, 256:112338, April 2021b. ISSN 0034-4257. doi: 10.1016/j.rse.2021.112338. URL <http://dx.doi.org/10.1016/j.rse.2021.112338>.

Jie Zhao, Yu Li, Patrick Matgen, Ramona Pelich, Renaud Hostache, Wolfgang Wagner, and Marco Chini. Urban-aware u-net for large-scale urban flood mapping using multitemporal sentinel-1 intensity and interferometric coherence. *IEEE Transactions on Geoscience and Remote Sensing*, 60:1–21, 2022. ISSN 1558-0644. doi: 10.1109/tgrs.2022.3199036. URL <http://dx.doi.org/10.1109/TGRS.2022.3199036>.