

5

10

**This manuscript is a pre-print** and has been submitted for publication in *Geosphere*. It has yet not undergone peer-review. If accepted, the final version of this manuscript will be available via the “Peer-reviewed Publication DOI” link on the right-hand side of this webpage. Please feel free to contact any of the authors directly. We welcome feedback!

20

25

# The building blocks of igneous sheet intrusions: insights from 3D seismic reflection data

Jonas Köpping<sup>1</sup>, Craig Magee<sup>2</sup>, Alexander R. Cruden<sup>1</sup>, Christopher A-L. Jackson<sup>3</sup>,  
5 James R. Norcliffe<sup>3</sup>

<sup>1</sup>*School of Earth, Atmosphere and Environment, Monash University, Melbourne, 3800, Australia*

<sup>2</sup>*School of Earth and Environment, University of Leeds, Leeds, LS2 9JT, UK*

10 <sup>3</sup>*Basins Research Group (BRG), Department of Earth Science and Engineering, Imperial  
College London, London SW7 2BP, UK*

Corresponding author: Jonas Köpping (Jonas.Kopping@monash.edu)

## ABSTRACT

15 Dykes, sills, and inclined sheets may intrude as continuous, planar sheets, but can also form by the  
amalgamation of discrete injections of magma. Describing the host rock deformation style around  
distinct geometric components within sheet intrusions can help us to determine emplacement  
mechanisms, how magma flow influences accumulation of economic resources, and how magma  
migration may translate into ground surface deformation prior to volcanic eruptions. Geometric  
20 components, such as ‘magma fingers’ and ‘segments’, form during sheet propagation by brittle  
and/or non-brittle emplacement mechanisms (i.e., shear failure, host rock fluidization), and  
fracture segmentation (i.e., elastic-brittle fractures), respectively. Seismic reflection data provide  
unique opportunities to map the 3D geometry of igneous sills over large areas and in high spatial  
detail, allowing us to identify these distinct geometric components and constrain magma flow  
25 patterns. However, limitations in the resolution of seismic reflection data mean we cannot discern  
the host rock deformation structures that allow the origin of these geometric components to be  
interpreted. Here, we use 3D seismic reflection data located offshore NW Australia to: i) introduce  
new terminology that defines the building blocks (i.e., elements) of sheet-like igneous intrusions  
and their connectors (i.e., H-type, S/Z-type), without tacitly linking their description to  
30 emplacement mechanisms; ii) quantify the 3D geometry of these elements and their connectors in  
two sills; and iii) discuss how element and connector geometries can be related to emplacement  
processes. For example, our measurements of connector heights along connectors exclude syn-  
emplacement rotation of principal stress axes as a primary segmentation mechanism for the host

sills. Based on seismic attribute analyses and the 3D geometry of elements, we conclude that potential brittle and/or non-brittle magma emplacement processes led to sill segmentation and to the formation of magma fingers. We show thickness varies across sills, and across distinct elements, which suggests that they grew and inflated independently with individual flow kinematics. Our data of element geometries and their connectors: i) permit comparison between different subsurface and field datasets spanning a range of host rock types and tectonic settings; and ii) allow us to test predictions of numerical and physical analogue models, helping us better understand magma emplacement mechanisms.

## 10 INTRODUCTION

Magma typically moves large distances laterally and vertically through the crust via networks of interconnected sub-vertical and sub-horizontal sheet intrusions (i.e., dykes and sills) (e.g., Anderson, 1937, 1951; Ernst et al., 2005; Muirhead et al., 2012; Magee et al., 2016; Cruden and Weinberg, 2018). For example, interconnected mafic sills and inclined sheets can transport magma laterally over >4100 km and vertically up to 12 km (Cartwright and Hansen, 2006; Leat, 2008; Magee et al., 2016). Understanding the architecture of these magma plumbing systems and how magma migrates through them is essential because they influence: i) volcanic hazards and their warning signals (e.g., Sparks, 2003; Cashman et al., 2013); ii) carbon dioxide and sulfur dioxide degassing to the atmosphere (e.g., Hernández et al., 2001; Schmidt et al., 2015; Ilyinskaya et al., 2017); and iii) the accumulation of economic resources (e.g., Barnes et al., 2016; Spacapan et al., 2018). There is a growing consensus that sheet intrusions within magma plumbing systems do not always propagate as continuous sheets, but rather as separate, elongate building blocks that inflate and coalesce into sheet-like intrusions (e.g., Pollard et al., 1975; Schofield et al., 2012a; Magee et al., 2016; Galland et al., 2019). These building blocks, which we refer to here as “elements”, have been studied using field observations (e.g., Pollard et al., 1975; Schofield et al., 2010; Spacapan et al., 2017; Galland et al., 2019), analogue and numerical models (e.g., Chanceaux and Menand, 2014, 2016; Bertelsen et al., 2018; Souche et al., 2019), and three-dimensional (3D) seismic reflection data (e.g., Thomson and Hutton, 2004; Guo et al., 2013; Magee et al., 2014). 3D seismic reflection data highlight the importance of these elongate features as they link sills and thus act as potential feeders in large magma plumbing systems (Guo et al., 2013; Magee et al., 2014).

To understand the initiation and propagation mechanisms of elongate elements, as well as their flow kinematics and dynamics, it is crucial to link and compare numerical/analogue experiments and analytical solutions with observations made in nature. Despite the clear benefit and importance of an integrated approach to understanding magma emplacement dynamics, we are currently faced with several challenges: i) we do not yet have fully coupled, fully 3D, numerical or laboratory models of magma emplacement that consider multiple emplacement mechanisms; ii) current numerical and laboratory models of sill emplacement mainly focus on the formation of saucer-shaped sills (e.g., Malthe-Sørenssen et al., 2004; Walker and Gill, 2020); and iii) observations made in the field are often limited to relatively small outcrops compared to the whole intrusion, and in many cases only represent a two-dimensional (2D) view of a 3D intrusion (e.g., Pollard et al., 1975). Analogue experiments benefit from being able to model elongate and lobate intrusion geometries in 3D, making them directly comparable to features seen in 3D seismic reflection data (e.g., Chanceaux and Menand, 2014, 2016; Bertelsen et al., 2018). Seismic reflection data are a powerful tool to bridge the gap between observations made in models and nature, as they allow mapping of sill morphologies in 3D down to tens-of-meters scale. However, in many cases the sill thickness is below the vertical seismic resolution, meaning that intrusion thicknesses and many surrounding host rock structures cannot be constrained, which adds uncertainty to the interpretation of 3D intrusion geometries. A lack of borehole data also means we often cannot directly determine intrusion thicknesses, and host rock lithologies and associated deformation mechanisms.

Here we use 3D seismic reflection data from the Exmouth Plateau, offshore NW Australia to study the geometry of igneous sills, focusing on their building blocks. More specifically we: i) introduce new descriptive terminology for elongate building blocks (i.e., elements) and their connectors; ii) quantify the dimensions of 3D element geometries and their connectors; iii) identify flow kinematics; and iv) combine this information to produce a conceptual model of sill emplacement dynamics and related deformation mechanisms.

By comparing sill thickness and reflection amplitude variations, we find that low-amplitudes within the Top-sill seismic reflection correspond to sub-vertical connectors between adjacent elements; these features can be used to map elements both above and below the vertical seismic resolution. Distinct thickness variations within adjacent elements suggest that they grew and inflated independently. When adjacent elements are vertically offset, they can form connectors


resulting in a step-like sill geometry. Following the assumption that vertical connector heights increase with increasing length when fracture segmentation occurs due to a rotation of the principal stress axis orientations (e.g., Pollard et al., 1975; Hutton, 2009), we exclude stress rotation as potential sill segmentation mechanism for the elements presented in this study. Our quantitative data of element geometries and their connectors can be used to compare different subsurface and field-based datasets with a range of host rock types, magma compositions, emplacement depths, and tectonic settings. The geometrical data presented here also allow us to test predictions from numerical and laboratory analogue experiments, contributing to a better understanding of sill emplacement mechanisms at shallow depths in the Earth's crust.

10

### **ELEMENTS, MAGMA FINGERS, SEGMENTS, LOBES, AND THEIR CONNECTORS**

Over the last few decades, several studies have shown that sheet intrusions (i.e., sills and dykes) do not always propagate as continuous planar sheets, but that they can separate into laterally and/or vertically offset magma fingers or segments at their propagating edges, depending on the syn-intrusive rheological behavior of the host rock (e.g., Pollard et al., 1975; Rickwood, 1990; Hutton, 2009; Schofield et al., 2010, 2012a; Spacapan et al., 2017; Galland et al., 2019; Magee et al., 2019b). As magma intrusion continues and these features inflate, they coalesce to form a continuous sheet intrusion (e.g., Pollard et al., 1975; Hutton, 2009; Schofield et al., 2010, 2012a; Galland et al., 2019). We briefly summarize the formation and propagation of these features below in order to provide an overview of the building blocks of sheet intrusions, their geometries, and associated host rock deformation. Previously used structural terms for these features within sheet intrusions have acquired a genetic connotation and are therefore no longer descriptive. Because the information required to demonstrate how these features form is commonly below the limit of seismic resolution, we introduce new, descriptive terminology (i.e., “element”) that we propose should be used prior to the interpretation of emplacement processes.

25

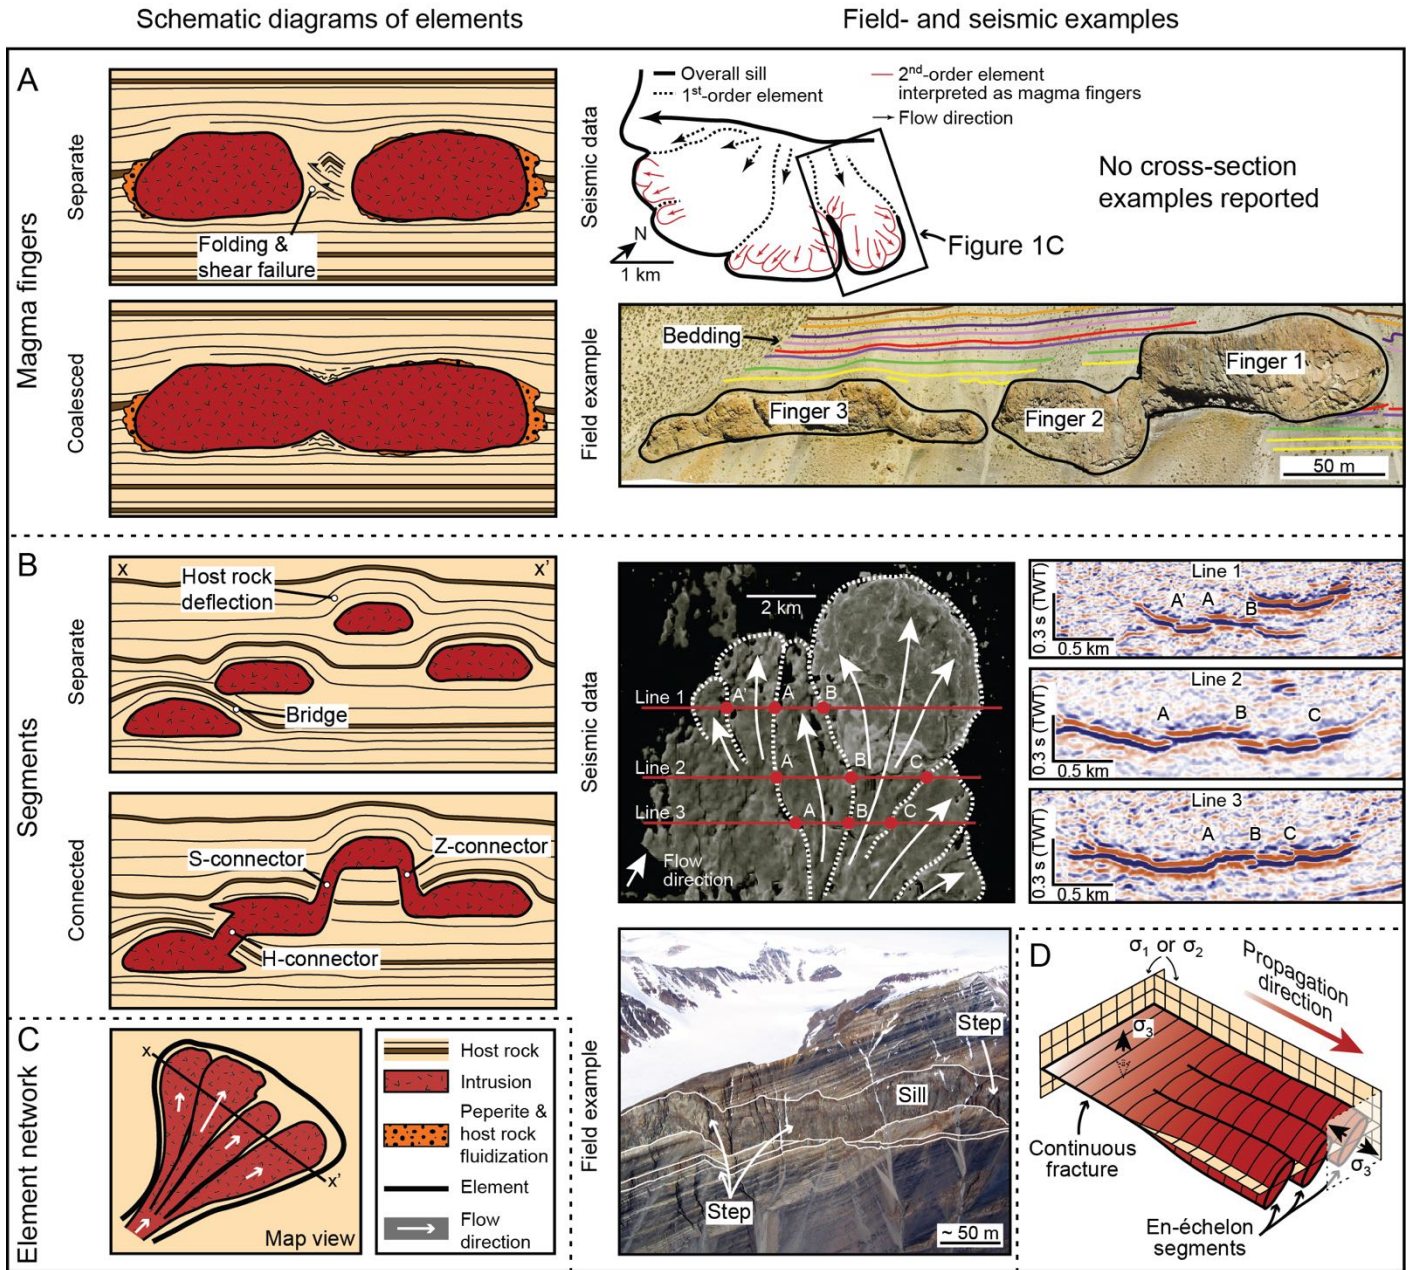

**Figure 1:** Schematic diagrams of elements with potential host rock deformation mechanisms highlighted and according analogues in seismic reflection data and in the field. (A) Magma fingers; Mapped elements interpreted as magma fingers in a sill imaged in 3D seismic reflection data located in the Rockall Trough (modified after Thomson and Hutton, 2004; figure from Magee et al., 2015), and in the Nequén Basin, Argentina (modified after Galland et al., 2019). (B) Segments; Opacity render of a sill located in the Flett Basin, NE Atlantic with large scale elements highlighted (dashed line). Corresponding seismic sections are interpreted to show segments and the growth of

intrusive steps and bridge structures along their boundaries (A'-C) (modified after Schofield et al., 2012b). Field photograph shows vertically offset segments connected via steps emplaced into sedimentary strata on Axel Heiberg Island, Canada (photo courtesy of Martin Jackson). (C) Schematic diagram showing multiple elements forming an element network. (D) Schematic diagram detailing how a rotation of principal stress axes orientation leads to fracture segmentation and the formation of vertically offset segments with parallel intrusion planes (after Hutton, 2009; Magee et al., 2019b; figure modified after Pollard et al., 1975). Note that interpreting elements as magma fingers or segments based on seismic reflection data can only be done if sufficient information about according host rock deformation is available. To avoid misinterpretation, we suggest the use of the descriptive term *element* (refer to text for further discussion).

### **Magma Fingers**

*Magma fingers* are relatively narrow features that are elongated in the magma flow direction with blunt and/or bulbous tips (e.g., Pollard et al., 1975; Schofield et al., 2010; Spacapan et al., 2017; Galland et al., 2019). Fingers mostly propagate along the same stratigraphic level but small vertical offsets can occur if magma exploits preferentially oriented, pre-existing weaknesses (Fig. 1A) (e.g., Schofield et al., 2010; Galland et al., 2019). Thickness/width aspect ratios of magma fingers measured in the field vary between 0.09 and 0.67 (e.g., Pollard et al., 1975; Spacapan et al., 2017; Galland et al., 2019). Host rock deformation related to their emplacement is observed to mainly involve: i) brittle faulting and cataclastic flow in the compressive regime between inflating magma fingers (e.g., Pollard et al., 1975; Spacapan et al., 2017; Galland et al., 2019), and/or ii) non-brittle processes (e.g., host rock fluidization, magma-sediment mingling) closer to the finger margins (e.g., Schofield et al., 2010, 2012a; Eide et al., 2017). The growth of magma fingers is therefore not a linear elastic fracture mechanics (LEFM) process. Where two fingers horizontally coalesce, cusp-shaped grooves containing deformed host rock form at the top and bottom sill-host rock contacts, resulting in a more sheet-like geometry (Fig. 1A) (e.g., Pollard et al., 1975; Schofield et al., 2010, 2012a). Magma finger initiation mechanisms are poorly understood and only generally described as being due to instabilities between a propagating magma front and the host rock (e.g., Saffman-Taylor instability) (e.g., Pollard et al., 1975; Schofield et al., 2010; Spacapan et al., 2017).

## Segments

*Segments* are also elongated in the magma flow direction, whereby sub-parallel, adjacent segments are vertically offset parallel to the intrusion plane (Fig. 1B) (e.g., Francis, 1982; Rickwood, 1990; Schofield et al., 2012a). Unlike magma fingers, segment growth is thought to be a LEFM process, where the intrusion is treated as a fluid-filled fracture (e.g., Delaney and Pollard, 1982; Pollard et al., 1982; Rickwood, 1990; Schofield et al., 2012a). LEFM has been used to explain the emplacement of sheet intrusions such as dykes, sills, and laccoliths (e.g., Pollard and Johnson, 1973; Nicholson and Pollard, 1985; Takada, 1990; Lister and Kerr, 1991; Kavanagh et al., 2006; Bunger and Cruden, 2011). When magma propagates via LEFM, the host rock is assumed to deform in a linear elastic manner, and the fracture propagates by mode I failure (i.e., tensile opening). In the case of sill emplacement, this elastic deformation results in overburden uplift and the formation of forced folds, which broadly represent the shape of the underlying intrusion (e.g., Pollard and Johnson, 1973; Galland, 2012; Jackson et al., 2013; Schmiedel et al., 2017; Reeves et al., 2018; Magee et al., 2019a).

During sill emplacement, two different mechanisms can lead to sheet splitting and the formation of discrete segments: i) a rotation of the principle stress axes ahead of the tip of the propagating main fracture, resulting in en-échelon fractures with a consistent stepping direction (e.g., Pollard et al., 1982; Nicholson and Pollard, 1985; Takada, 1990; Schofield et al., 2012a; Magee et al., 2019b) (Fig. 1D); and ii) the exploitation of pre-existing, preferentially oriented weaknesses with a lower tensile strength and/or fracture toughness (e.g., bedding planes, fault planes), likely leading to an inconsistent stepping direction (e.g., Hutton, 2009; Schofield et al., 2012a; Magee et al., 2013b, 2019b; Stephens et al., 2017). Since adjacent segments propagate on vertically offset horizons, they either overlap or underlap and are originally separated from each other by ‘bridges’ of host rock (Fig. 1B) (e.g., Magee et al., 2016, 2019b). Subsequent inflation may cause segments to connect due to brittle failure of the enclosing host rock, forming a continuous sheet with a step-like geometry (Fig. 1B) (e.g., Rickwood, 1990; Hutton, 2009; Schofield et al., 2012a, 2012b).

The thickness/width ratios of segments tend to be small compared to magma fingers. If the host rock deforms in a linear elastic manner, then:

$$W = \frac{PL}{E'} \quad (1)$$



where  $W$  = characteristic thickness,  $P$  = overpressure relative to the minimum in situ stress,  $L$  = characteristic crack length (radius for a circular sill; width (shorter dimension) for a segment), and the stiffness parameter  $E' = E/(1-\nu^2)$  where  $E$  = Young's modulus and  $\nu$  = Poisson's ratio.

If crack propagation is governed by LEFM, then:

$$P = K_{IC}\sqrt{L} \quad (2)$$

where  $K_{IC}$  = fracture toughness.

A range of reasonable values of  $K_{IC}$  and  $E'$  for host rocks such as sandstone ( $1.5e^6$  Pa m<sup>1/2</sup> and 20–55 GPa, respectively) or shale ( $1.4e^6$  Pa m<sup>1/2</sup> and 1–20 GPa, respectively) gives an upper W/L aspect ratio of ~0.0001–0.004.

10

### Elements and Their Connectors

Structural terms such as *magma fingers* and *segments* already connote potential emplacement mechanisms. However, magma fingers and segments cannot be distinguished in map-view, since information on host rock deformation mechanism and intrusion 3D geometry are missing. We therefore propose the term *element* to generally describe the building blocks of sills (i.e., magma fingers, segments), without attempting to infer their 3D geometries or emplacement mechanisms. Semi-radial magma flow pathways can form groups of fanning magma fingers and/or segments, termed *lobes* (e.g., Thomson and Hutton, 2004; Hansen and Cartwright, 2006a; Schofield et al., 2012b). Adjacent lobes are interpreted to form in response to: i) changing magma flow kinematics (e.g., Thomson and Hutton, 2004); ii) discrete magma injections (e.g., Thomson and Hutton, 2004; Horsman et al., 2016; Magee et al., 2016); or iii) cycles of magma front cooling, inflation, and magma break-out (e.g., Hansen and Cartwright, 2006a; Miles and Cartwright, 2010; Currier and Marsh, 2015). Hence, the term *lobe* is no longer descriptive and implies distinct emplacement processes. We therefore designate lobate sill components as large-scale *elements*, which can be classified into different orders. In this way, first-order elements comprise a group of smaller second-order sub-elements, which potentially can be sub-divided into third-order elements, where magma fingers and segments represent the smallest end-members in the element hierarchy (Fig. 1A, C). When these end-members grow in length and width, the magma-host rock contact at the element tip may become unstable and break down again into a new order of multiple smaller elements. A large, semi-radial, first-order element consisting of multiple orders of sub-elements is termed an *element network* (Fig. 1A, C).


Adjacent elements are vertically and/or horizontally offset and separated by host rock, which we refer to as a *host rock separator* (Fig. 1A, B). When overlapping or underlapping elements inflate, brittle failure of the host rock separator may cause both elements to connect, forming *broken bridges* and *steps*, respectively (e.g., Rickwood, 1990; Hutton, 2009; Schofield et al., 2012a). Broken bridges and steps have been used as evidence for magma propagation by tensile brittle fracture mechanisms (i.e., fracture segmentation) (e.g., Hutton, 2009; Schofield et al., 2012a). However, recent field studies show that magma fingers that propagated via brittle and/or non-brittle processes can also be vertically offset and connected, forming a step-like geometry (Fig. 1A) (Galland et al., 2019). We introduce the term *H-connector*, to describe connectors between overlapping elements (formerly known as a ‘broken bridge’) (e.g., Nicholson and Pollard, 1985; Schofield et al., 2012b) and *S-*, or *Z-connector* for underlapping elements (formerly known as ‘steps’) (e.g., Rickwood, 1990; Magee et al., 2019b), with a right-upwards and right-downwards oriented stepping direction, respectively, when observed looking in magma flow direction (Fig. 1B). When elements grow in width while propagating along the same stratigraphic horizon (i.e., magma fingers) they coalesce, forming cusp-shaped groves containing deformed host rock, which mark contacts between adjacent elements (e.g., Pollard et al., 1975). In both stepped and strata-concordant sheets, contact geometries form at the lateral margins of elements (e.g., Schofield et al., 2012a; Galland et al., 2019; Magee et al., 2019b). The strike of these connectors can therefore be used to determine the propagation direction of both the elements and the main sheet, which in turn can help to identify potential magma feeder zones (e.g., Magee et al., 2014; Schofield et al., 2017).

## GEOLOGICAL SETTING

The Exmouth Plateau is part of the North Carnarvon Basin, which is located on the rifted margin of northwest Australia and formed by multiple episodes of extension during the Late Paleozoic and Mesozoic (Fig. 2A) (e.g., Symonds et al., 1998; Karner and Driscoll, 1999; Longley et al., 2002; Stagg et al., 2004). The Exmouth Plateau is composed of a ~10 km thick sedimentary sequence atop a ~10 km thick basement of stretched continental crust (e.g., Exon and Buffler, 1992; Exon et al., 1992; Symonds et al., 1998). Formation of the Tethys Ocean during the Permian resulted in extensive stretching and thinning of the crust, followed by rapid subsidence and the deposition of fluvial deltaic siliciclastic pre-rift sediments of the Triassic Locker Shale and

Mungaroo Formation, which form the host rocks of five sills in the study area (Figs 2B-D) (e.g., Exon and Buffler, 1992; Exon et al., 1992; Symonds et al., 1998; Stagg et al., 2004). Sedimentary rocks of this pre-rift sequence are offset by steeply dipping northeast-southwest striking normal faults that formed in the earliest rifting phase of the Exmouth Plateau during the Late Triassic-to-  
5 Early Jurassic break-up of Argoland from Greater India (Figs 2C and D) (e.g., Exon and Buffler, 1992; Stagg et al., 2004; Black et al., 2017; Bilal et al., 2018).

Rift-related magmatism in the North Carnarvon Basin spanned the Late Jurassic-to-Early Cretaceous (Fig. 2D) (e.g., Mihut and Müller, 1998; Symonds et al., 1998; Rey et al., 2008; Magee and Jackson, 2020). A large intrusive body, characterized by high seismic velocities that is inferred  
10 to comprise mafic-to-ultra mafic rocks, was emplaced into the lower crust ~165–136 Myrs ago, potentially acting as the source for the extensive network of sills and dykes observed across the area (Fig. 2D) (e.g., Mihut and Müller, 1998; Rey et al., 2008; Rohrman, 2013; Magee and Jackson, 2020). Dating of forced folds, hydrothermal vents, and fluid escape structures, all interpreted to be related to sill intrusion, suggest that sill emplacement across the North Carnarvon Basin started in  
15 the Kimmeridgian (~157 Ma; Fig. 2D) (e.g., Rey et al., 2008; Magee et al., 2013a, 2017; Rohrman, 2013; Norcliffe et al., 2020). These sills are occasionally cross-cut by radiating dykes of the Tithonian (~152–147 Ma) Exmouth Dyke Swarm (Fig. 2D) (Magee and Jackson, 2020). A final phase of magmatism was associated with continental break-up and the development of the continent-ocean transition zone outboard of the Exmouth Plateau (Fig. 2D) (e.g., Symonds et al.,  
20 1998; Rey et al., 2008; Magee et al., 2013b). Our study focuses on Late Jurassic-to-Early Cretaceous sills that were emplaced into pre-rift (predominantly Triassic) sedimentary rocks.

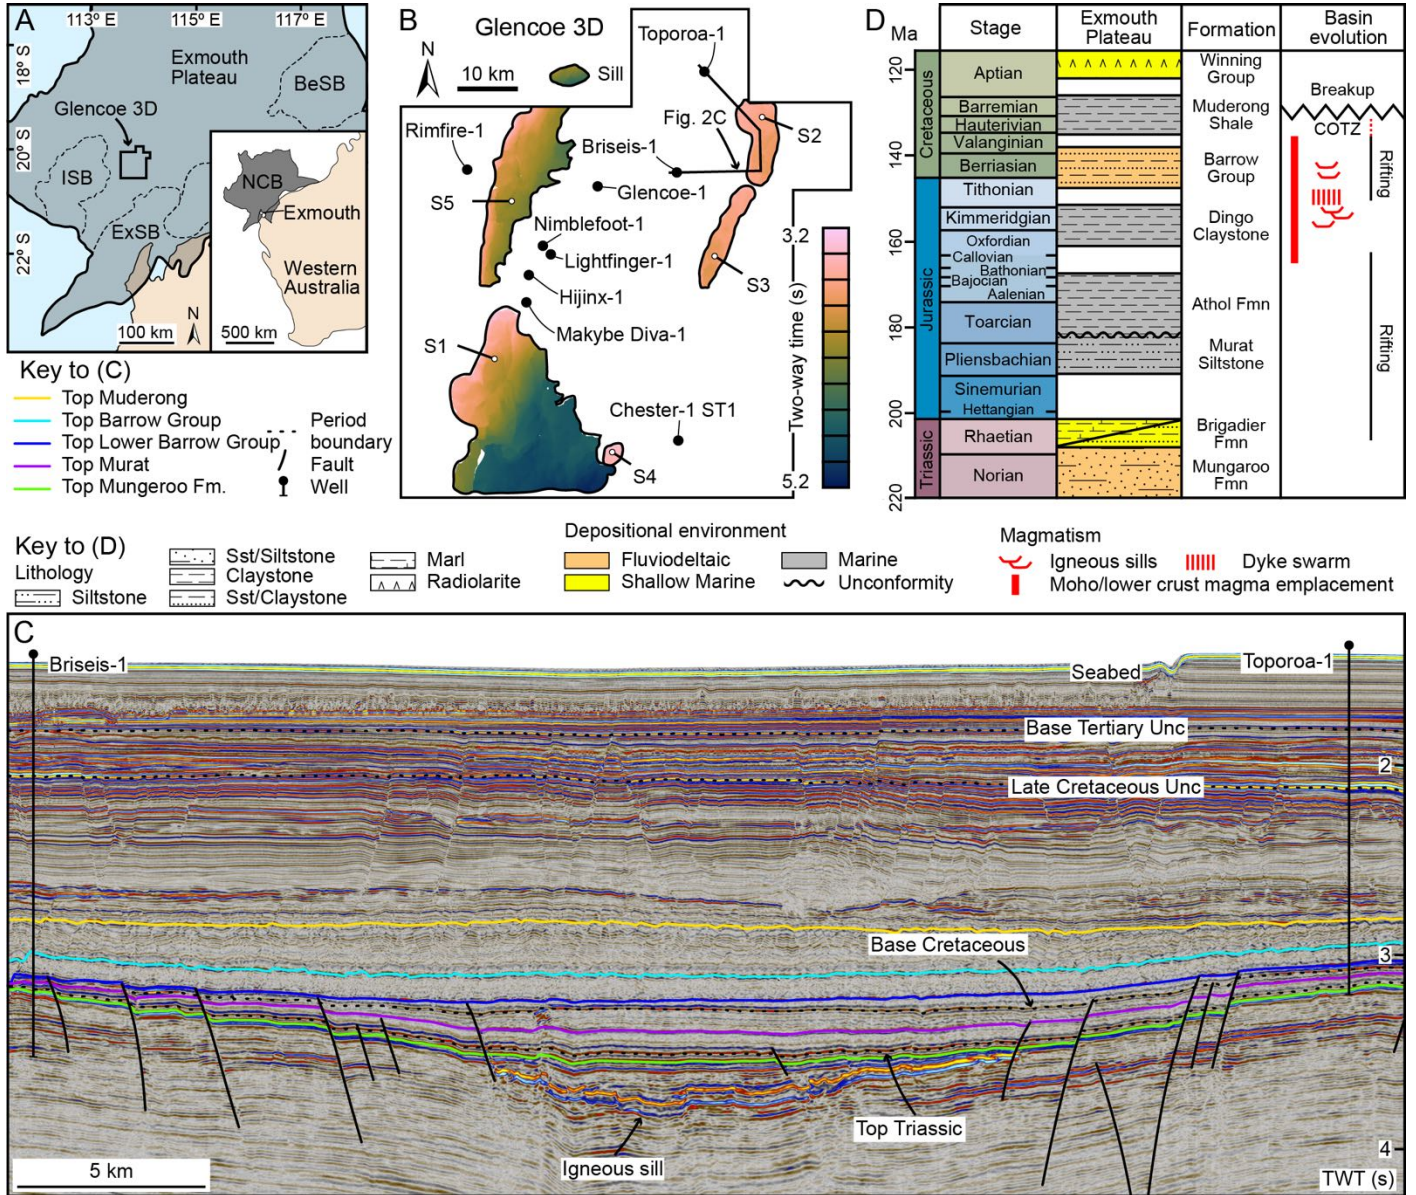

**Figure 2:** (A) Location map of study area with 3D seismic reflection survey Glencoe 3D highlighted; NCB = North Carnarvon Basin (gray), ISB = Investigator Sub-basin, ExSB = Exmouth Sub-basin, BeSB = Beagle Sub-basin. (B) Overview of Glencoe 3D survey with two-way time (TWT) horizons of mapped sills. Borehole data used to define a time-depth relationship are indicated. (C) Interpreted seismic section through sill S2 with main stratigraphic horizons and period boundaries. For section location see (B); depth in TWT (s). (D) Simplified chronostratigraphic chart for the Exmouth Plateau based on well logs (Briseis-1 and Toporoa-1) and Geoscience Australia. Tectonic events and magmatism are highlighted; COTZ = Continent-

ocean transition zone (based on Tindale et al., 1998; Longley et al., 2002; Magee and Jackson, 2020; Norcliffe et al., 2020).

## 5 DATA AND METHODS

### Seismic Reflection Data and Seismic Resolution


This study uses a zero-phase, time-migrated, 3D seismic reflection survey (Glencoe 3D) covering an area of approximately 4042 km<sup>2</sup> (Fig. 2). In-lines and cross-lines are oriented E-W and N-S, respectively and have a regular spacing of 25 m. These data image to a depth of 8 s two-way time (TWT) and are displayed with SEG positive polarity; i.e., a downward increase in acoustic impedance corresponds to a positive reflection (red), whereas a decrease corresponds to a negative reflection (blue). Seafloor depths in the survey area range from 1335–1664 ms TWT and, assuming a water velocity of 1500 m s<sup>-1</sup>, between 1001–1248 m, respectively.

Borehole data from wells near the studied sills were used to: i) constrain the ages of mapped key horizons and their lithology; ii) perform a tuning wedge model; and iii) perform a time-depth conversion based on check-shot data, thereby allowing us to compare element geometries measured in seismic reflection data with field analogues and the predictions of both numerical and analogue experiments. We used a second order polynomial best-fit regression to the check-shot data to extrapolate the measurements to greater depths below the bottoms of the boreholes (e.g., Reeves et al., 2018; Norcliffe et al., 2020). To most accurately constrain sill depths and thicknesses, we used different time-depth conversions for sills S1 and S2, using check-shot data from boreholes nearest to each sill (S1 = Chester1-ST1, Hijinx-1, Nimblefoot-1, Makybe-Diva-1, Lightfinger-1; S2 = Briseis-1, Glencoe-1, Toporoa-1; Table S2-1 and Jupyter notebook S2-1 in the Supplemental Material<sup>1</sup>). The coefficient of determination ( $R^2 = 0.99$ ) of the estimated gradient between check-shots and depth measurements was calculated to quantify the accuracy of the simplified time-depth conversion, which we then used to determine the paleo-emplacement depth and vertical offsets of the sill elements in meters.

In addition to converting measurements in time to depth in meters, we use seismic velocity information to establish the resolution to the imaged sills. However, major sills (e.g., S1 and S2) resolved in this survey mainly occur at depths of 3200–5150 ms TWT (~3000–6600 m) and are not penetrated by boreholes, meaning we have no direct constraints on their seismic velocities.

Strata-concordant, high-amplitude reflections intersected by Rimfire-1 at 3632 m depths do correspond to a  $\sim 20$  m thick basaltic rock body, which we interpret as a sill. Based on reported interval velocities from mafic sills in other case study (e.g., Skogly, 1998; Berndt et al., 2000; Smallwood and Maresh, 2002; Magee et al., 2019a), we assume a sill velocity of 5550 ( $\pm 10\%$ ) m s<sup>-1</sup> to determine the seismic resolution in the vicinity of S1 and S2 (e.g., Skogly, 1998; Berndt et al., 2000; Smallwood and Maresh, 2002). The dominant seismic frequency ( $f$ ) in the proximity of the sills is  $\sim 25$  Hz, which in combination with the inferred sill velocities ( $v$ ), suggests a dominant wavelength ( $\lambda$ ) of  $\sim 224.5$  m ( $\lambda = v/f$ ). Following Brown (2011), this leads to a limit of separability ( $\lambda/4$ ) of  $\sim 56$  m ( $\pm 5.6$ ) and a limit of visibility ( $\lambda/30$ ) of  $\sim 7$  m ( $\pm 0.7$ ); i.e., sills with a thickness  $> 56$  m ( $\pm 5.6$ ) are resolved with distinct top- and base-contact reflections, whereas sills those that are  $< 56$  m ( $\pm 5.6$ ) and  $> 7$  m ( $\pm 0.7$ ) thick (limit of separability  $>$  intrusion thickness  $>$  limit of visibility) are not resolved but detected in the seismic data and expressed as tuned reflection packages (Fig. 3) (e.g., Brown, 2011; Magee et al., 2015). In this case, discrete seismic reflections from the top and base intrusion contacts interfere on their return to the surface and cannot be distinguished, thus making it difficult to quantify sill thicknesses (e.g., Jackson et al., 2013). Apparent thickness measurements of tuned reflection packages are slightly underestimated for thicknesses above maximum tuning, and overestimated for thicknesses below maximum tuning (Fig. 3). In both cases, we cannot identify a distinct Base-sill reflection and, instead, the lowermost, high-amplitude reflection with a negative polarity was mapped as the Base-sill reflector. This reflection may not represent the true sill-host rock contact, resulting in both under- and overestimated apparent thicknesses (Fig. 3). When a seismic signal propagates through the Earth's crust, its dominant frequency decreases with increasing depth, resulting in an increasing dominant wavelength and thus in a decay of vertical resolution in depth (e.g., Bacon et al., 2007). The horizontal seismic resolution is approximated by  $\lambda/4$  resulting in  $\sim 56$  m ( $\lambda \approx 224.5$  m) within the vicinity of the studied sills (e.g., Lebedeva-Ivanova et al., 2018).



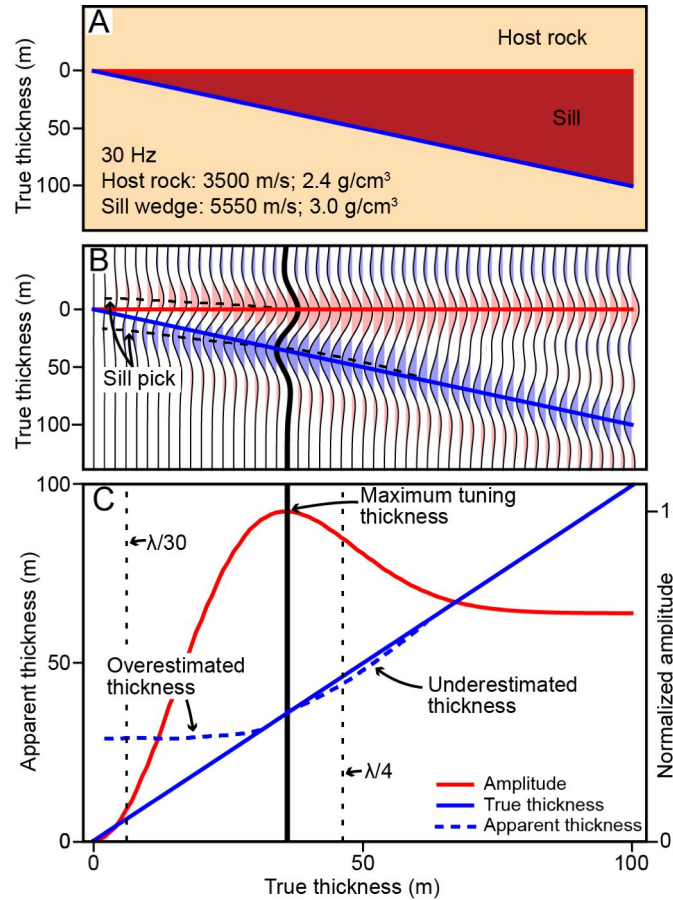

**Figure 3:** Seismic tuning wedge model simulating zero-phase seismic reflection data. (A) Input model. Input parameters represent a sedimentary host rock and a basaltic intrusion, but are not based on borehole data from the Exmouth Plateau. (B) Wiggle traces of the synthetic seismic model with red indicating a positive and blue a negative polarity, respectively. Black dashed line shows potential sill pick of both the Top and Base-sill reflector, following the uppermost/lowermost, high-amplitude reflection with a positive/negative polarity, respectively. (C) Predicted normalized amplitude and apparent thickness plotted against true thickness (Jupyter notebook S2-2 in the Supplemental Material<sup>1</sup>).

10

### Mapping Sills and Primary Magma Flow Indicators in 3D Seismic Reflection Data

With the exception of a seismically unresolved sill intersected by Rimfire-1, no other boreholes in the study area penetrate sills. To identify sills within the seismic reflection data, we therefore use the criteria defined by Planke et al. (2005) and classify as sills reflections that: i) have high

15

amplitudes; ii) display a positive polarity (a downward increase in acoustic impedance); iii) locally transgress host rock strata; and iv) terminate abruptly. However, two main pitfalls have to be considered while mapping and/or interpreting igneous sills in seismic reflection data: i) in many cases, sills are not intersected by boreholes, which makes it difficult to validate the seismic reflection data interpretation; ii) igneous sills often are displayed as tuned reflection packages, which adds uncertainties to the interpretation of sill geometries and morphologies as geophysical artifacts are more likely to occur (e.g., Smallwood and Maresh, 2002; Magee et al., 2015). Tuned reflections allow sill outlines to be relatively well constrained in map view, but only allow estimates of sill thicknesses to be between the limits of separability and visibility. Tuned reflections therefore add uncertainties to 3D geometry interpretations including those of elements and element connectors (e.g., Magee et al., 2015; Eide et al., 2018), hampering the ability to interpret magma emplacement mechanisms. Synthetic seismic forward models have shown that image quality can also be influenced by the host rock style (i.e., homogenous vs. interbedded) (Magee et al., 2015; Eide et al., 2018). The contacts between strata-discordant sills and bedding planes can cause positive interference within seismic reflection data at shallow depths (<1.5–2 km), resulting in geophysical artifacts expressed as an apparent step-like sill geometry (i.e., ‘pseudosteps’) and therefore may lead to misinterpretation of sill geometries (Magee et al., 2015; Eide et al., 2018).

Elements and their connectors form parallel to the main magma flow direction and are primary magma flow indicators (e.g., Rickwood, 1990; Schofield et al., 2012b; Galland et al., 2019; Magee et al., 2019b). Identifying and mapping elements and H- and S-/Z-connectors in seismic data thus helps to: i) reconstruct magma flow pathways and potential sill emplacement history, and ii) identify potential sill feeder zones, as well as larger, source magma reservoirs (e.g., Thomson and Hutton, 2004; Schofield et al., 2012b, 2017; Magee et al., 2014). Connectors between adjacent elements are typically expressed as low-amplitude stripes on top-sill amplitude maps (e.g., Schofield et al., 2012b, 2017; Magee et al., 2015), resulting from sill thickness variations (Magee et al., 2015). For example, when elements propagate along the same stratigraphic level and coalesce, the sill is thinner at the point of coalescence (e.g., Fig. 4D) (e.g., Pollard et al., 1975). In case the sill thickness is below the maximum tuning thickness, amplitudes decrease with decreasing sill thickness and can therefore be used to infer relative thickness variation and to identify contact geometries. On the other hand, when elements are vertically offset



and connected via H- or S-/Z-connectors, local sill thickening occurs due to the formation of sub-vertical connectors (Fig. 4D). This sill thickening causes a decrease in amplitude in case the sill thickness is above the maximum tuning thickness (Fig. 3 and 4D) (Magee et al., 2015). These findings are based on synthetic seismic forward models (Magee et al., 2015) and suggest that low-amplitude stripes on top sill amplitude maps can indicate connector geometries (Figs 3 and 4D).

In this study, we manually picked two igneous sills (S1 and S2; Fig. 2B), and key horizons in encasing host rock, on inlines and crosslines with a regular spacing of 250 m. These grids were carefully quality checked and used as seed points to propagate (i.e., auto-track) surfaces. We further identified and mapped the primary magma flow indicators of sill S1 and S2.

### Quantitative Analyses


We used a combination of seismic horizons of sills (map-view) and related seismic sections (cross-section view) to map sill morphologies, including different orders of sill elements and their connectors. For each sill as well as its component elements, we manually measured maximum lengths and their maximum widths perpendicular to the length in map-view (Fig. 4A). Errors in length and width measurements are estimated to be in range of the seismic horizontal resolution ( $\sim 56$  m). It is important to note that sills and their elements could thin below the limit of visibility ( $\sim 7$  m ( $\pm 0.7$ )); all values reported below should therefore be considered minima.

We classify the geometry of elements based on changes in the angle  $\alpha$ , that spans between the left- and right-hand element margin looking along the element long-axis (Fig. 4B). This angle is not constant for a single element, but rather increases and decreases along the element long-axis, with  $\alpha > 0$  indicating widening (i.e., increase in element width) and  $\alpha < 0$  indicating narrowing (i.e., decrease in element width) (Fig. 4B). To ensure accuracy as well as to assess how  $\alpha$  varies along the element long-axis, the element margins are partitioned into smaller sections (Fig. 4B). The angle between the related section and a reference line ( $\sim$  element long-axis) is calculated at each node. These angles are measured for the left-hand side ( $\alpha_L$ ) and right-hand side ( $\alpha_R$ ), respectively, and the sum of both angles at the same location along the element long axis equals the total angle  $\alpha$  at this location (Fig. 4B). The mean angles reported are given by the average of all  $\alpha$  measured in each element, weighted by section length.

Where the sill S2 is expressed as two separate reflections, mapping the top and base reflector allows us to depth convert measured sill thicknesses in time to meters using the inferred

velocity ( $5550 \text{ m s}^{-1} (\pm 10 \%)$ ). Thickness and amplitude measurements were exported every 25 m along three seismic sections oriented either perpendicular or parallel to the long-axis of the elements. Where sill S2 is imaged as tuned reflections and absolute thicknesses cannot be quantified, amplitude measurements were used to infer relative thickness changes (i.e., thickening, 5 thinning) as suggested by synthetic forward models (Figs 3 and 4D) (e.g., Magee et al., 2015). However, assuming thicknesses of tuned reflection packages at the outermost sill margin are below maximum tuning, increasing and decreasing amplitudes indicate relative sill thickening and thinning, respectively (Fig. 3C).

To quantify vertical offsets between adjacent elements, and the vertical height of their 10 connectors, we measured the TWT at zero-crossings (i.e., null point of the amplitude) of lateral element tips, which we then converted to depth (s TWT to m) (Fig. 4C, D). This data was collected in  $\sim 100$  m spaced seismic sections, starting from the most inward part of the connector towards its tip, perpendicular to the strike of the mapped contact geometries (H- and S-Z-connector).

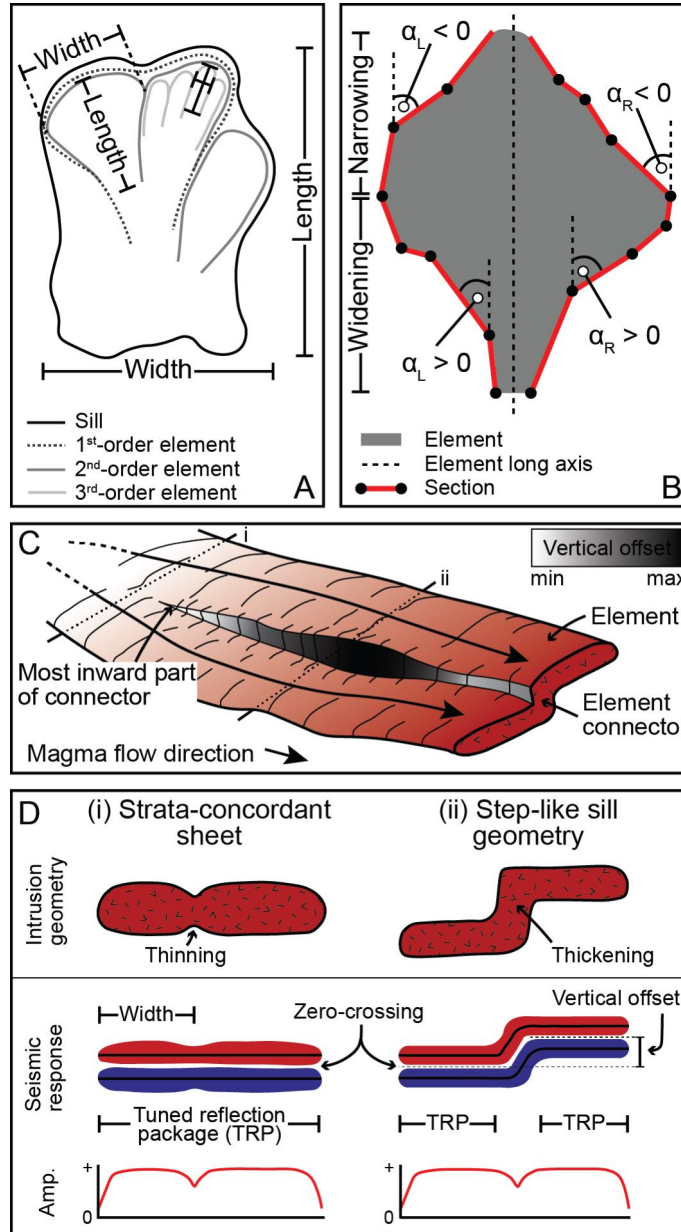

**Figure 4:** (A) Schematic diagram of a sill indicating comprising elements and according width and length measurements. (B) Schematic diagram of an element and measured angles  $\alpha$ . The element outline is partitioned into small sections to quantify how  $\alpha$  varies in long-axis direction. Angles are measured between the section and the element long-axis at the node of each section. The sum of angles measured for the left-hand side ( $\alpha_L$ ) and right-hand side ( $\alpha_R$ ) at the same location on the element long axis equals the total angle  $\alpha$ . A positive angle  $\alpha$  represents an element widening (i.e., increase in width), whereas a negative angle  $\alpha$  represents an element narrowing (i.e., decrease in width). (C) Schematic diagram showing two vertically offset elements that are connected via an

S-Z-connector (modified after Schofield et al., 2012a). Gray-scale color bar highlights the variation of vertical offsets as well as the location of minimum and maximum offsets. Dotted lines (i) and (ii) indicate the location of schematic cross sections shown in (D). (D) Schematic cross section of (i) coalesced elements at the same stratigraphic level, and (ii) vertically offset elements that coalesced via an S-Z-connector, resulting in a strata-concordant and step-like sheet intrusion, respectively. Red and blue colors of schematic seismic responses indicate a positive and negative polarity, respectively, and zero-crossings represent the null point of the amplitude. Vertical offsets are defined as the height between the zero-crossings of adjacent elements. Schematic seismic amplitude plots are based on predictions of seismic forward models (Magee et al., 2015). TRP = Tuned reflection package.

## RESULTS


In order to investigate sill-morphologies and small-scale sill-geometries, we mapped two seismically resolved sills (S1 and S2), where the Top-sill contacts are expressed as laterally discontinuous high-amplitude reflectors with a positive polarity, highlighting the downward increase in acoustic impedance at host rock-sill contacts (e.g., Fig. 5). Base-sill contacts are resolved as high-amplitude reflectors with a negative polarity (i.e., decrease in acoustic impedance at sill-host rock contacts). Where possible, we identified and mapped the Base-sill contacts, where the reflections are resolved as distinct seismic events. However, in large areas of sill S1 and parts of sill S2 distinct Base-sill reflections are not resolved, in which case the sills are imaged as tuned reflection packages. The mapped sills have different morphologies, including 1) strata-discordant inclined sheets (S1); and 2) saucer-shaped sills, where the strata-concordant inner sill is flanked by strata-discordant transgressive limbs (S2) (Fig. 2B).

### Sill S1

The S1 inclined sheet dips southeast and extends at least ~35 km down dip and ~25 km along strike (Fig. 5). However, the complete geometry and size of S1 cannot be determined because the southern end is not imaged within the seismic survey. S1 transgresses from a maximum depth of 5.15 s TWT in the southeast up to 3.25 s TWT at the northern tip, which is located immediately below the Mungaroo Formation-Rhaetian Marl contact (Figs 5A and D). S1 is expressed as distinct

5 top and base reflections within its northern sector, where it is up to ~85 ms TWT (~236 m) thick (Figs 5C-E). In contrast, the sill peripheries, as well as reflections at greater depths (> 4.2 s TWT), are below the limit of separability and thus imaged as tuned reflection packages (~7 m < sill thickness < ~56 m) (Figs 5C-E and 6A-C). The Top-sill reflection is of relatively high-amplitude at shallow levels (< 4 s TWT), decreasing with depth (Figs 5B and D). It is important to note that the general relationship between relatively high-amplitude reflections at shallow levels holds irrespective of whether the sill is characterized by distinct or tuned reflections (Figs 5B and E).



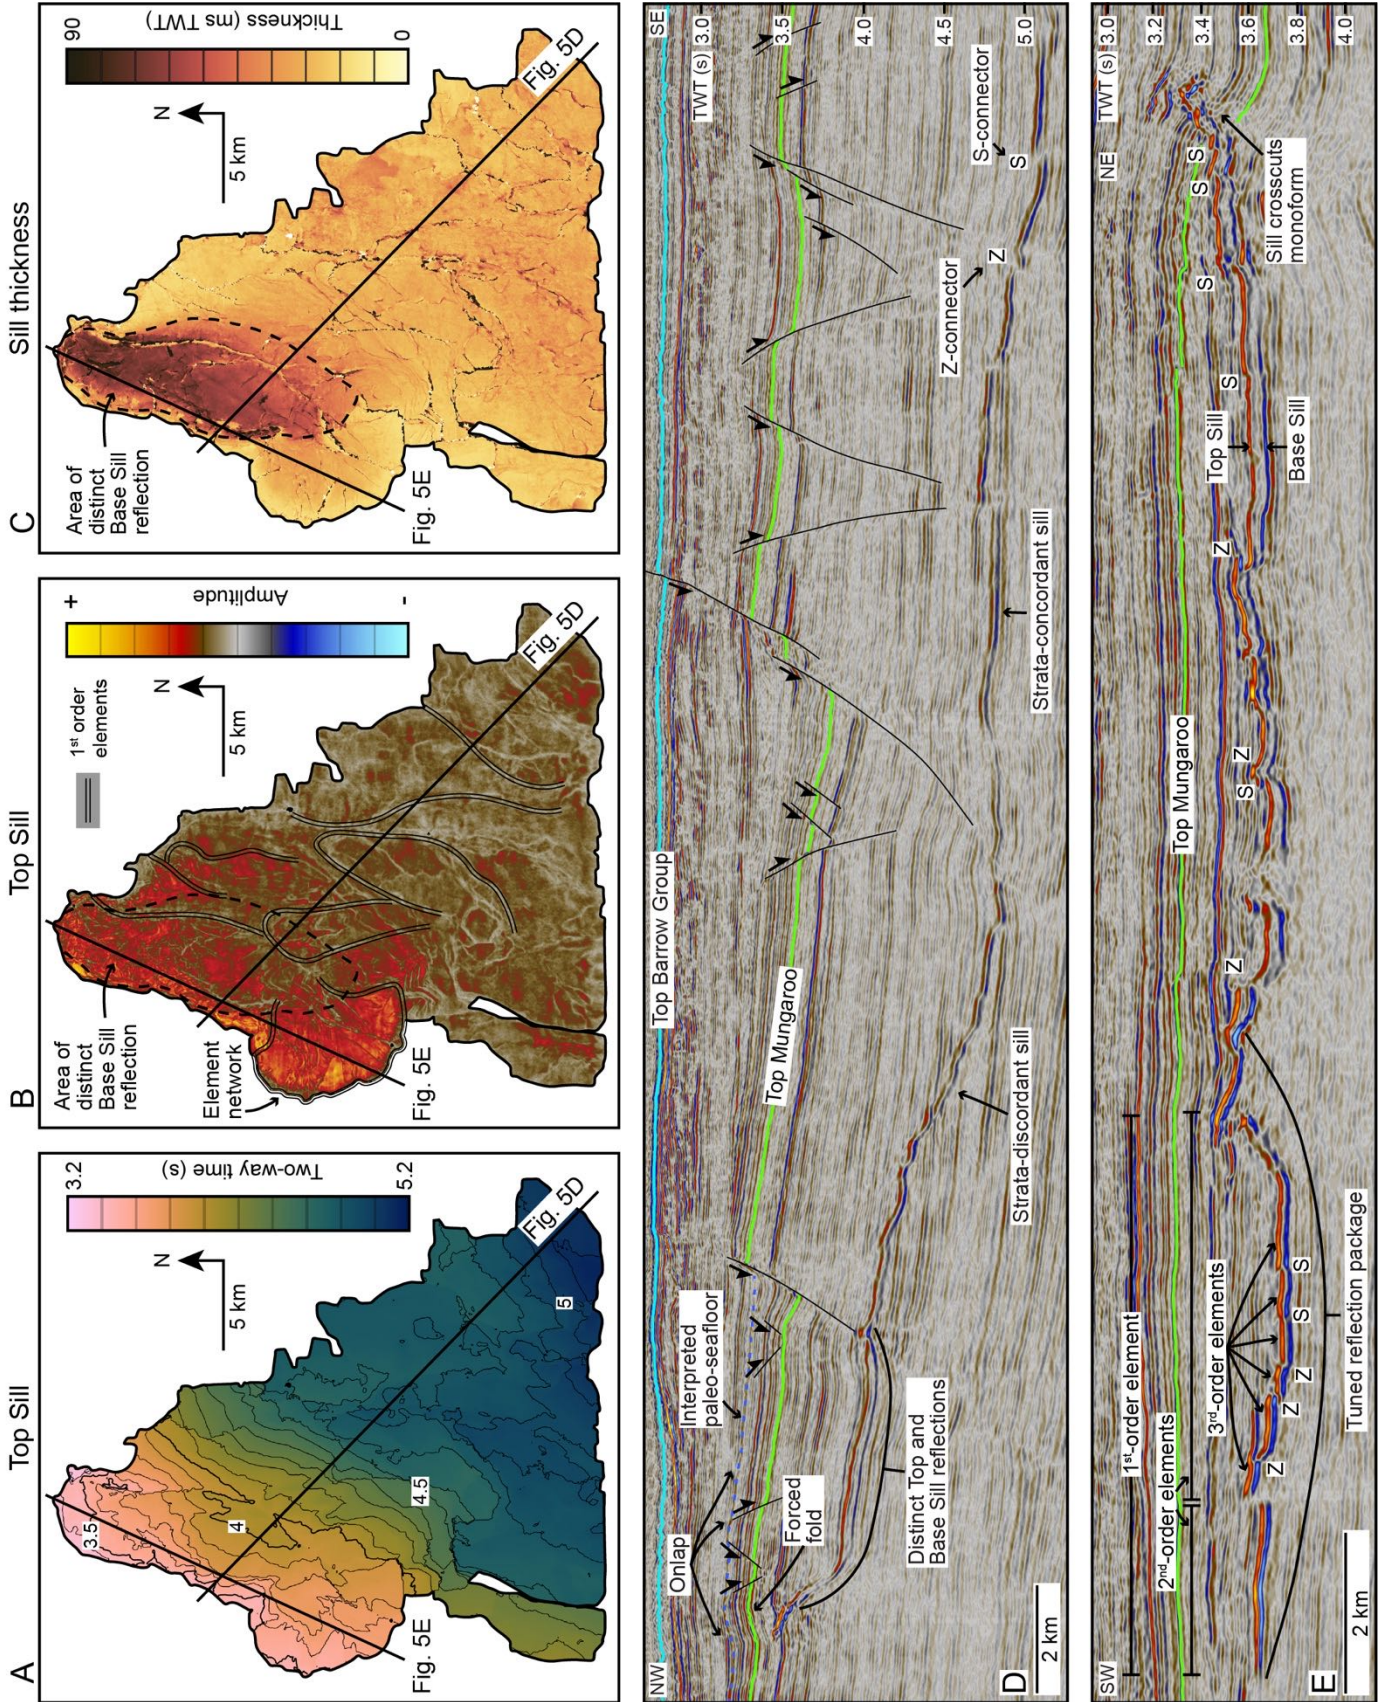


**Figure 5:** (A–C) Maps showing the time-structure (A) and absolute-peak-amplitude (B) of the Top-sill horizon of S1, as well as the two-way time thickness (C) between the Top and Base-sill horizons. The Base-sill was mapped in areas where two distinct reflectors are resolved (black dashed line), whereas the lowermost, high-amplitude reflection with a negative polarity was mapped in tuned reflection packages. (D, E) Interpreted seismic sections detailing both sill geometry and morphology as well as sill emplacement related host rock deformation. Seismic section (D) is oriented parallel to the dip-direction of S1 showing strata-concordant and strata-discordant sill sections. Multiple orders of elements are shown in section (E), which is oriented NE-SW and covers an area of shallow-level sill emplacement. This section includes elements resolved as tuned reflections in the SW, and as distinct reflectors in the NE, both observed at a depth of  $\sim 3.2\text{--}3.8$  s TWT.

### ***Elements and their Connectors***

We classify large sections of S1 as large-scale, first-order elements, which are resolved as tuned reflection packages (Figs 5B and 6A). Absolute peak amplitude maps highlight linear variation of relatively lower amplitudes at the lateral borders of each seismically resolved element, indicating contact geometries (H- and S-Z-connectors; Figs 5E and 6C). At relatively shallow emplacement depth ( $\sim 3.8\text{--}3.5$  s TWT depth), we observe four orders of sub-horizontal, bedding-parallel elements radiating from the inclined sheet, forming an arcuate element-network (Fig. 6A). This element-network has a westward termination and extends over  $\sim 8.5$  km N-S and  $\sim 5.5$  km E-W (Fig. 6A). Elongated, fourth-order elements form the smallest seismically resolved member of this network and they emerge from the outer margin of third-order elements (Fig. 6B). Since elements are vertically offset, adjacent elements either over- or underlap and often coalesce, forming H- and S-Z-connectors, respectively, with an inconsistent stepping direction (Fig. 6C).



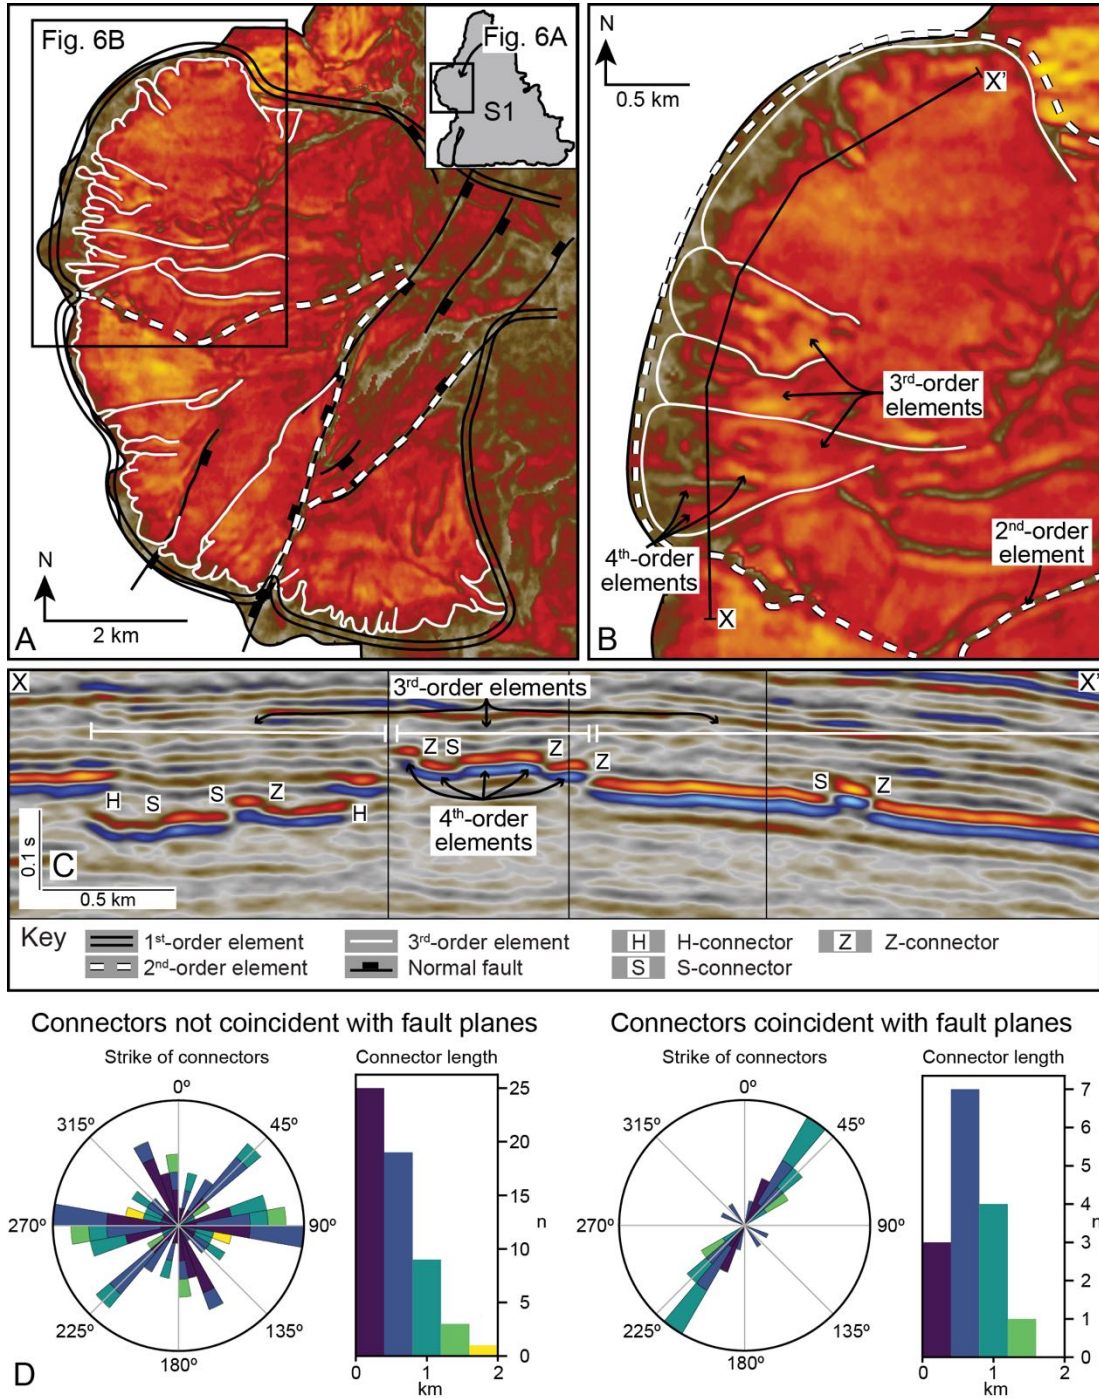


**Figure 6:** (A, B) Absolute-peak-amplitude maps showing an element network comprised of four orders of elements. Pre-existing normal faults are indicated. (C) Interpreted seismic section through the outer margin of a second-order element, approximately perpendicular to the strike of containing third-order elements. Elements are strata-concordant but vertically offset, and form H- and S-Z-connectors with an inconsistent stepping direction. See Fig. 6B for seismic section



location. (D) Rose diagrams and histograms show the strike and length of connectors that coincide with pre-existing fault planes, and those that do not coincide with pre-existing structures.

5            In order to measure their orientations and vertical heights, we mapped 71 connectors within  
the element network described above (Fig. 6A). Element-connectors have semi-radial orientations  
with strikes varying from SW to NW (Fig. 6D). When adjacent elements are separated by a pre-  
existing fault plane, S- or Z-connectors coincide with the fault plane and strike NE-SW similar to  
the pre-existing structure (Fig. 6D). The maximum connector length ranges from 81–1808 m, with  
10 fault-related connectors tending to be longer (Fig. 6D). When connectors coincide with pre-  
existing fault planes, their maximum vertical height ranges from 22 m ( $\pm 17$ ) to 257 m ( $\pm 17$ ), which  
is significantly greater than connectors that are not coincident with fault planes (4–121 m ( $\pm 17$ ))  
(Fig. 7A). Minimum vertical offsets mostly occur at the most inward part of the elements (55 %) or  
at their propagating tips (21 %) (Fig. 7B). Most (78 %) minimum vertical height measurements  
15 range from 0–25 m, however, greater heights of up to 154 m ( $\pm 17$ ) occasionally occur and are  
located along the connector's length (Fig. 7B). Maximum vertical heights are evenly distributed  
along connector lengths with a slight increase at the element tips (18%) (Fig. 7A). Maximum  
connector heights range up to 257 m ( $\pm 17$ ) with the majority (94%) being <100 m.

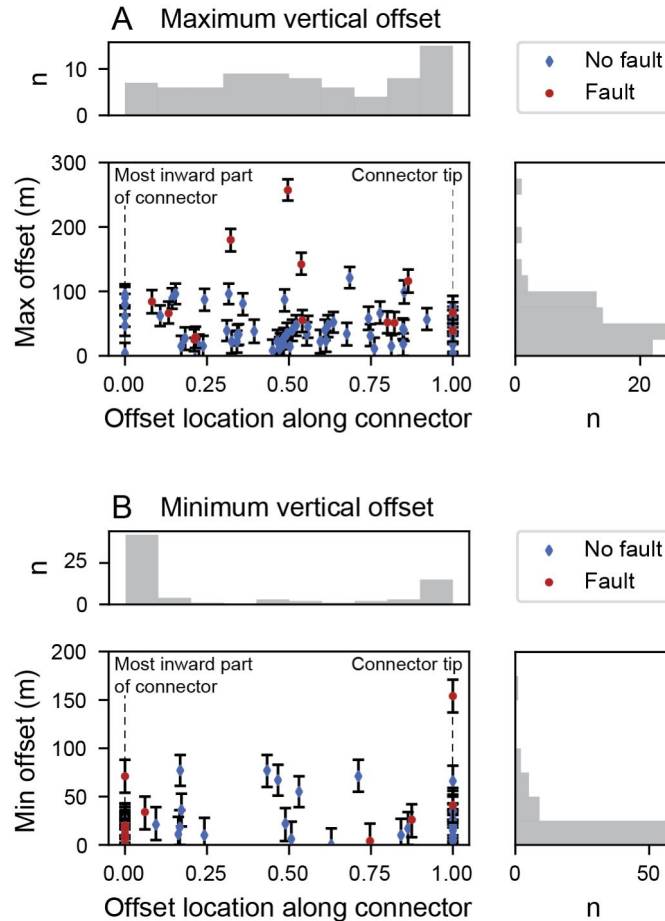

**Figure 7:** (A) Maximum and (B) minimum vertical offsets of adjacent and connected elements cross-plotted with the location of occurrence, where 0 is the most inward part of the connector and 1 is the connector tip, independent of the connector length. Error bars indicate a range of  $\pm 4$ ms  
 5 TWT distance. Bin-sizes of histograms are 0.1 and 25 m in x and y direction, respectively. Offsets of connectors that coincide with a pre-existing fault plane are highlighted in red (Table S2-3 and Jupyter notebook S2-3 in the Supplemental Material<sup>1</sup>).



## 10 Sill S2

Sill S2 occurs at a depth of  $\sim 3.81\text{--}3.5$  s TWT and extends at least 13.5 km N-S and 6 km E-W direction (Fig. 8A). Pre-existing, Jurassic faults define the sill borders, resulting in an overall NNE-elongate geometry (Fig. 8B). Inwardly inclined, moderately dipping ( $\sim 23\text{--}35^\circ$ ) transgressive limbs are coincident with a major fault bounding the sill's eastern margin, and a more minor fault in the

west. Both inclined limbs extend over vertical distances of up to 0.29 s TWT (~470 m), transgressing the Mungaroo Formation-Rhaetian Marl contact (Fig. 2C). Even though the bounding fault west of S2 is only resolved at the southern end of the sill, an inclined limb formed over a lateral distance of ~7.2 km towards the north-northeast (Figs 8A and B). Where S2 is not bounded by an inclined limb in the west, two westward-diverging, sub-horizontal element-networks (EN1, EN2) form an arcuate geometry with a northwesterly termination (Figs 8B and D). Sill S2 comprises two morphologies separated by a NE-SW striking normal fault: i) an elongate saucer-shaped sill in the south; and ii) a sub-horizontal, bedding-concordant sill in the north (Fig. 8B). Two distinct reflectors are observed along most of the elongate inner sill of S2, defining a maximum thickness of 98 ms TWT (~272 m ( $\pm 27$ )). In contrast, the inclined limbs and the sub-horizontal outer margin in the south and the northwest (EN2) are imaged as tuned reflection packages (Figs 8B and C). The elongate section of S2 thins from east to west (Fig. 8C). The TWT-thickness-map (Fig. 8C) highlights these thickness variations but also shows that sill thickness can vary distinctively between neighboring elements at a range of scales (Figs 8C and 9A).

Three different orders of elements were observed and mapped throughout S2. First-order elements include the semi-radially fanning element-networks EN1 and EN2 in the northern section of S2, which we sub-divide into second-order elements (Fig. 8D). Elongate, third-order elements form the smallest seismically resolved member in the element-hierarchy of S2 and emerge from the outer margin of second-order elements of EN2 but occasionally also occur within EN1. These smallest resolved elements are comparable to the fourth-order elements described from S1 (Figs 6B and 8D). Second-order elements, with occasional smaller, third-order elements, occur within the elongated, saucer-shaped section and the southern tip of S2.

Relatively low amplitude linear features define element connectors that have different orientations depending on the sill morphology (Fig. 8E). Where inclined limbs bound S2, element connectors strike parallel to the NE-SW trending bounding faults and inclined limbs (Fig. 8E). Connectors that coincide with pre-existing fault planes strike in the same NNE-SSW direction as the faults, whereas connectors that do not coincide with fault planes have strikes that vary from NNW-SSE to NE-SW (Fig. 8E). Element connectors within the two sub-horizontal, bedding-concordant element-networks (EN1, EN2) in the north have strikes that fan towards NW, ranging from N to W (Fig. 8E).

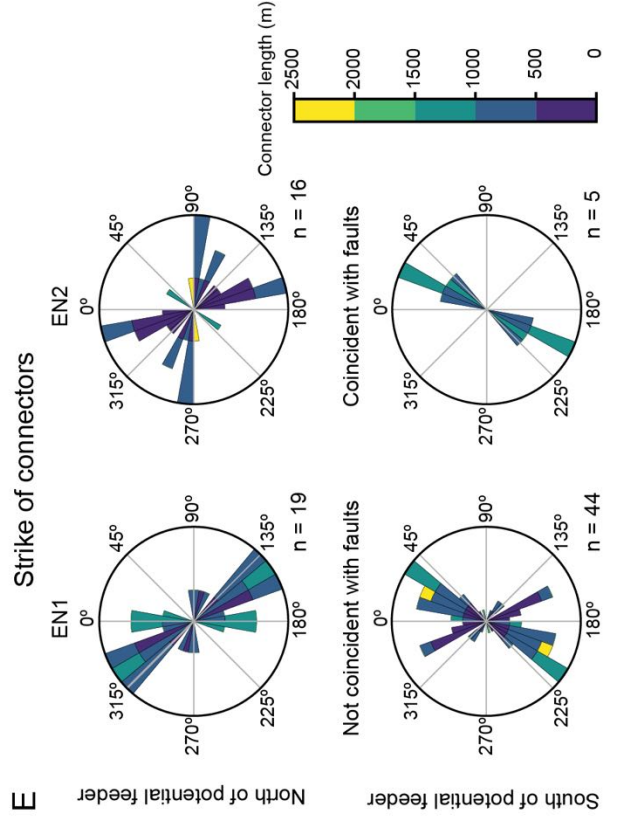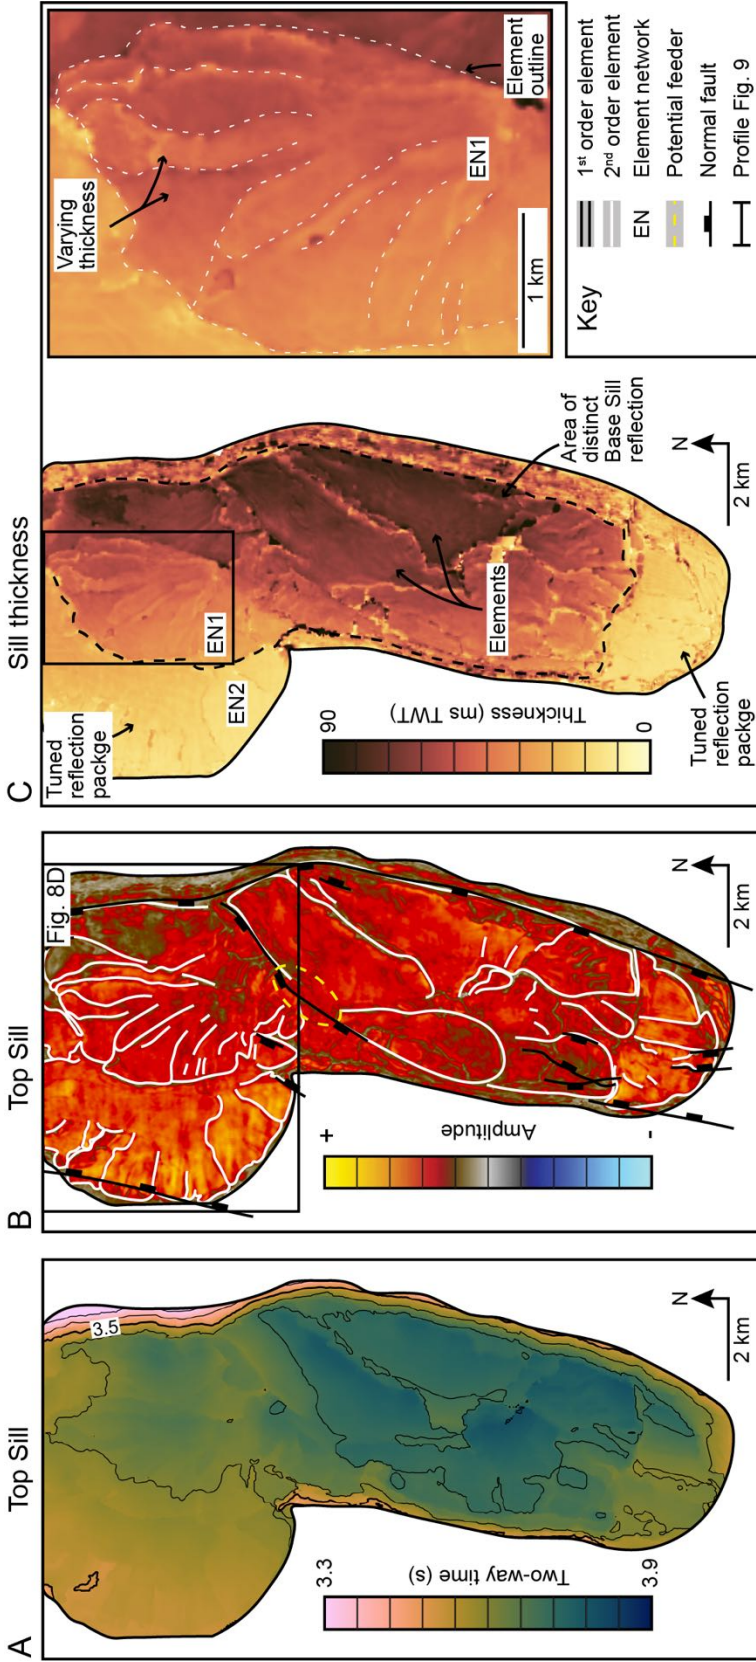

**Figure 8:** (A–C) Maps showing the time-structure (A) and absolute-peak-amplitude (B) of the Top-sill horizon of S2, as well as the two-way time thickness (C) between the Top- and Base-sill horizons. The Base-sill was mapped in areas where two distinct reflectors are resolved (black dashed line), whereas the lowermost, high-amplitude reflection with a negative polarity was mapped in tuned reflection packages. (D) Absolute-peak-amplitude map detailing two semi-radially fanning element networks (EN1, EN2) north of the potential feeder zone. Seismic sections as well as thickness and amplitude profiles along X-X', Y-Y', and Z-Z' are shown in Fig. 9. Rose diagrams (E) show the strike of mapped connectors between adjacent elements. Bins are color-coded with respect to the connector's length.

10

### *Amplitude and Thickness Variations of Elongate Elements*

Amplitudes of the Top-sill horizon and thickness measurements of S2 were collected along two seismic lines oriented perpendicular to, and one parallel to the strike of the element connectors (location of lines shown in Fig. 8D). Profile X-X' (Fig. 9A) shows amplitude and thickness variations of elements in cross-section in the more inward part of EN1. In this area, the top and base of EN1 are resolved as two distinct seismic reflections. High amplitudes are mainly located in the center of elements, with minor fluctuations occurring along these high-amplitude plateaus (Fig. 9A; E1 and E4). Low amplitudes define segment connectors (i.e., S-Z-connectors) (Fig. 9A). Sill thickness measurements based on depth-converted Top- and Base-sill horizons range from 123.5(±12.5) – 185.5(±18.5) meters, with adjacent elements varying in thickness (Figs 8C and 9A). Where single elements are resolved without overlapping neighboring elements, the peak thickness occurs in the center of the elements and thins out towards their margins (Fig. 9A; E4, E5). In some cases, peak thicknesses coincide with low amplitudes and the inferred location of element connectors (Fig. 9A; contact between E2 and E3). Here, the top reflection of the stratigraphically higher element overlies the bottom reflection of the stratigraphically lower element, resulting in a measurement of the S-Z-connector thickness, rather than the single elements, and an apparent local sill thickening (Fig. 9A; contacts between E2-E3 and E4-E5). Thickness/width aspect ratios for the elements displayed in profile X-X' vary between 0.31 and 0.71.


30

Amplitudes periodically increase and decrease in a second-order element at the outer margin of EN2 (Y-Y'), where the sill is expressed as a tuned reflection package (Fig. 9B). Relatively low amplitudes define element connectors (i.e., S-Z-connectors) (Fig. 9B). Low amplitudes within the second-order element are expressed as linear low-amplitude features in map-view and potentially highlight the contacts of strata-concordant, third-order elements, which within their centers show relatively high amplitudes (Figs 8D and 9B). Since EN2 is resolved as a tuned reflection package, thickness measurements do not represent the true sill thickness, and absolute thickness variations cannot be inferred from the data. Assuming a limit of visibility and separability of  $7(\pm 0.7)$  m and  $56(\pm 5.6)$  m, respectively, thickness/width aspect ratios of the elements in EN2 range from 0.02 to 0.35, which is smaller than those observed in EN1 (profile X-X').

Along seismic section Z-Z' parallel to the strike of element connectors, we show that thickness and seismic amplitude varies in both cases when the sill is resolved as separate reflectors (EN1) and tuned reflections (EN2; Fig. 9C). EN1 gradually thins towards its tip ( $132(\pm 13) - 99(\pm 10)$  m), while the thickness drops below the limit of separability in EN2 (Fig. 9C). Minor amplitude variations occur within EN1, and low amplitude values define the contact between EN1 and EN2. Amplitudes within EN2 fluctuate slightly, with a peak occurring at 2750 m along the profile, which decreases rapidly towards the sill tip (Fig. 9C).

A plot of normalized amplitudes versus the depth-converted thicknesses of all measurement points of the three seismic sections (Figs 9A-C) indicates a high variance of amplitudes for thicknesses greater than the limit of separability (Fig. 9D). With decreasing sill thickness, amplitudes increase below the limit of separability and are therefore expressed as tuned reflection packages (Fig. 9D). Amplitudes within these tuned reflection packages further increase until reaching the maximum tuning thickness, after which they decrease (Fig. 9D). The minimum apparent thickness observed is 38 m, which is only slightly below the maximum tuning thickness of 51 m. However, we note that these apparent thickness measurements are likely to be overestimated (Fig. 3C). Predictions of a simplified tuning wedge model (Jupyter notebook S2-2 in the Supplemental Material<sup>1</sup>) show similar amplitude trends, but the predicted maximum tuning thickness of 43 m is 8 m lower than observed in our data. Modeled amplitudes for thicknesses above the limit of separability are constant, contrary to data collected along the seismic sections described above (Fig. 9D).



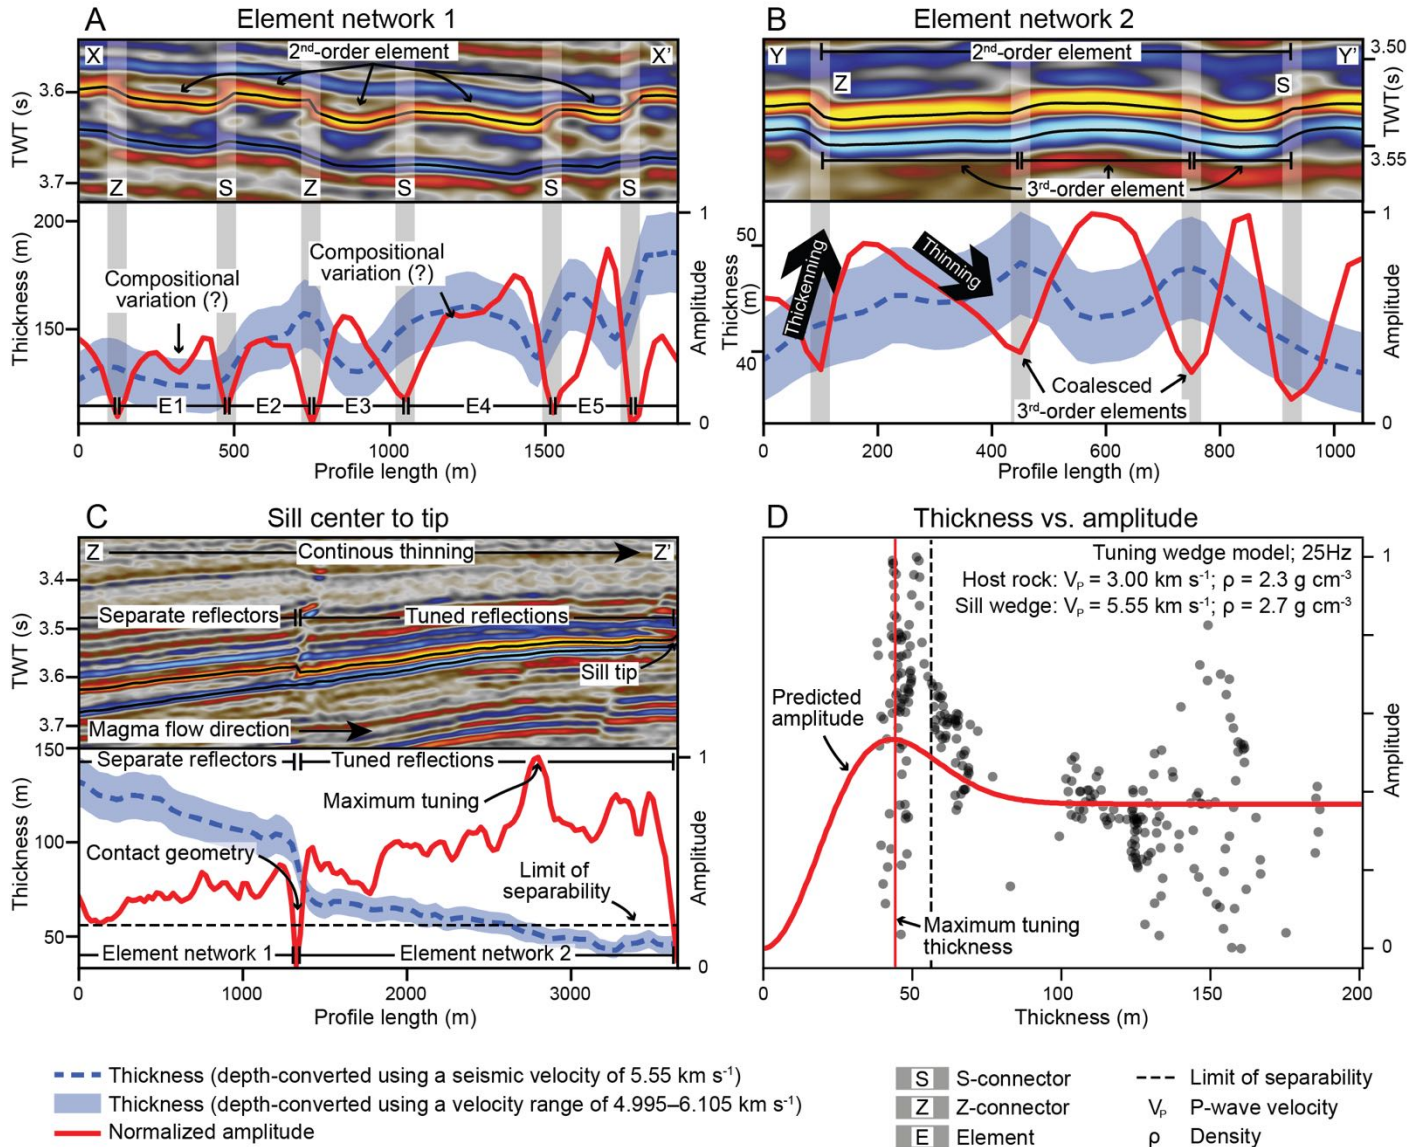

**Figure 9:** (A–C) Interpreted seismic sections and according thickness and amplitude profiles oriented perpendicular to connector geometries in EN1 (A) and EN2 (B), as well as parallel to connector geometries of both EN1 and EN2 (C). Each seismic section is presented in two-way time (s) depth. Changes in thickness (m) (calculated for seismic velocities of  $5550 \text{ m s}^{-1}$  blue dashed line;  $\pm 10\%$  light blue envelope) and normalized amplitude (red) of the Top-sill contact are shown. For seismic section location see Fig. 8D. (D) Thickness measurements cross-plotted with normalized amplitudes of all measurement points shown in (A–C). Predicted amplitudes based on a simplified tuning wedge model are presented in red (Jupyter notebook S2-2 in the Supplemental Material<sup>1</sup>). Input model host rock parameters are based on borehole data (Hijinx-1). Note that

thicknesses below the limit of separability represent apparent thicknesses and are likely to be underestimated or overestimated (Fig. 3).


## 5 Element Geometries

We observe two main types of first- to third-order element geometries in S1 and first- and second-order elements in S2:

(1) *Type 1* – elongate, slightly to moderately widening elements. We subdivide these into *Type 1A* elements that consistently increase in width ( $\alpha > 0$ ) with minor changes in the  $\alpha$  angle; and *Type 1B* elements that also consistently increase in width, but then narrow along the long axis towards the tip ( $\alpha < 0$ ) (Fig. 10A). We observed 38 Type 1 elements with broad range of  $\alpha_{\text{mean}}$  values (-1–55°), where Type 1A elements ( $n = 29$ ) tend to have larger  $\alpha$  angles with a broader range (7–55°) compared to Type 1B elements ( $n = 9$ ;  $\alpha_{\text{mean}} = -1$ –27°) (Fig. 10B). This occurs because Type 1B elements narrow at their tips with  $\alpha < 0$ , resulting in smaller  $\alpha_{\text{mean}}$  angles (Figs 3B and 10A). Since Type 1 elements have elongate geometries, their width-to-length aspect ratios are  $< 1$  (0.27–0.93; average of 0.61), with element lengths ranging over two orders-of-magnitude (181–5061 m) (Fig. 10C). Long-axis orientations of higher order sub-elements within Type 1 geometries are predominantly sub-parallel to either the long-axis or the margins of the first order element and therefore only vary slightly within a single element (Fig. 10A).

(2) *Type 2* – semi-radially fanning elements with a moderate to large  $\alpha$  angle (up to 137°). These geometries are often fed through a relatively short and narrow tube with a small to moderate  $\alpha$  angle, before a rapid increase in width with  $\alpha$  up to 137° (Fig. 10A). We observed 14 Type 2 elements with a broad range of  $\alpha_{\text{mean}}$  angles (41–122°) (Fig. 10B). Their maximum width and length range from 370–3940 m and 345–2348 m, respectively, resulting in width-to-length aspect ratios predominantly  $> 1$  (0.77–2.37; average of 1.42), with aspect ratios  $< 1$  (0.77 and 0.78) occurring in two elements with relatively long feeding sections. Width-to-length aspect ratios of Type 2 geometries tend to increase with increasing element length (Fig. 10C). The long-axes of higher-order sub-elements within Type 2 geometries define semi-radial fans with trends that vary between the lateral margin orientations, due to larger  $\alpha$  angles compared to Type 1 geometries (Figs 10B and D).



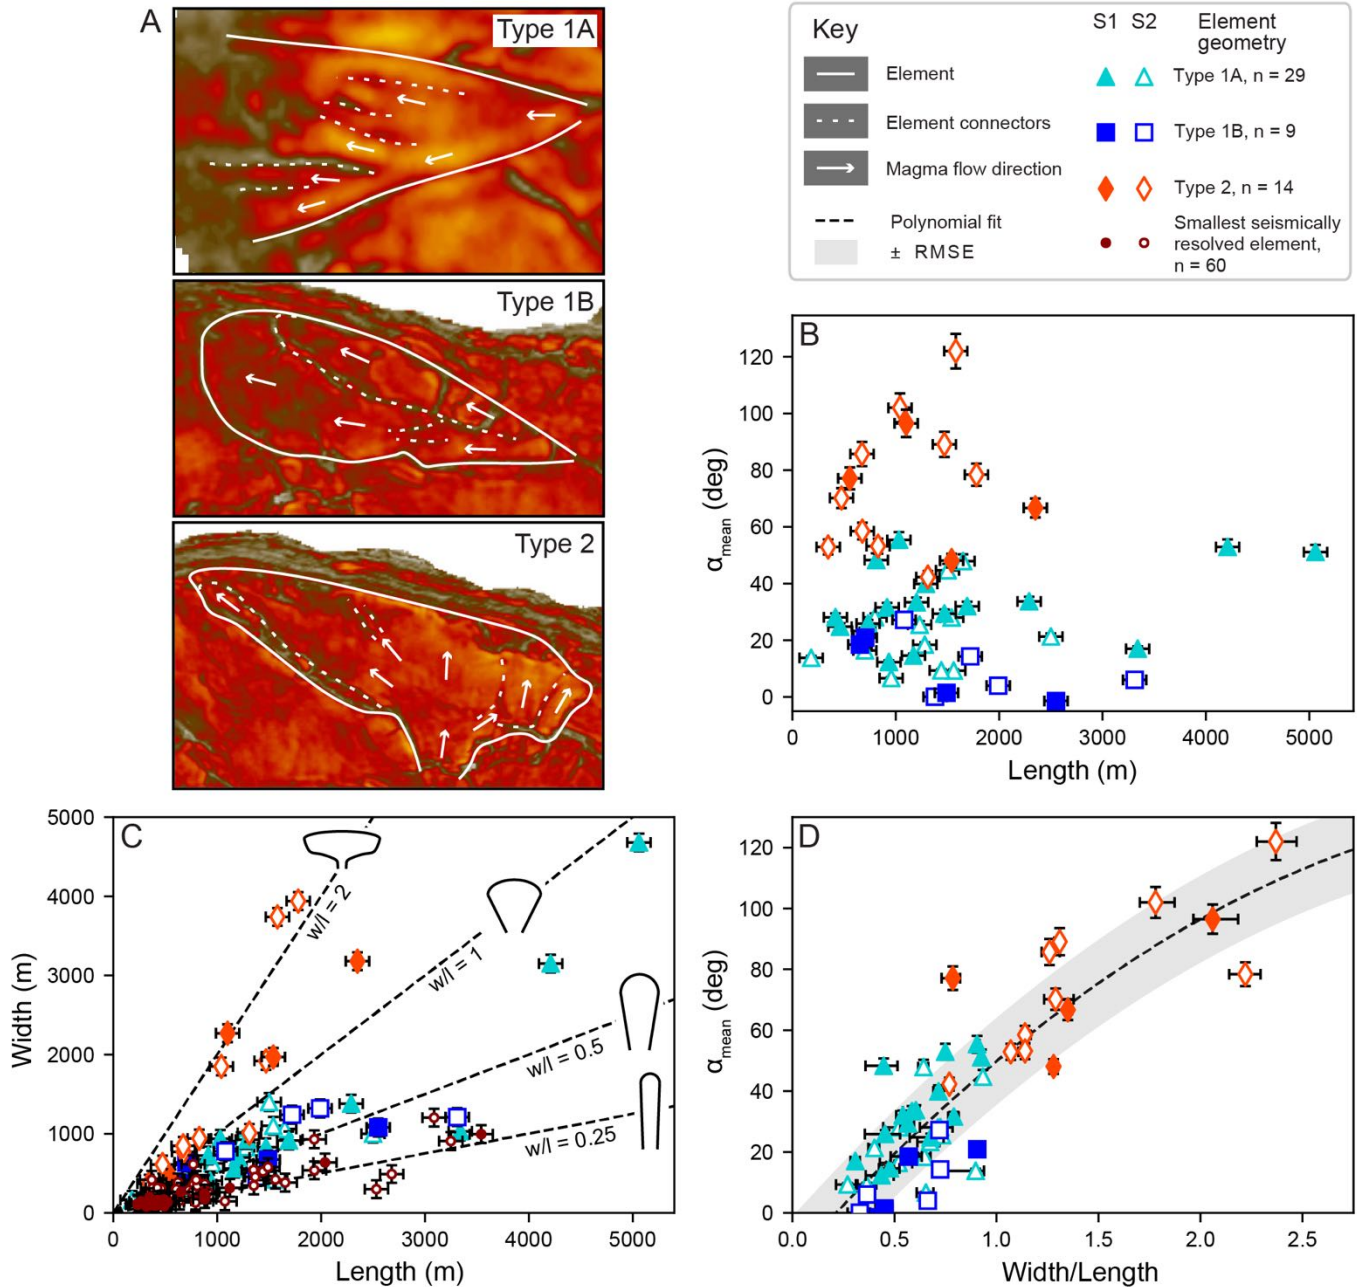

**Figure 10:** (A) Absolute-peak-amplitude maps showing different element geometries (i.e., Type 1A, 1B, 2). Dashed white lines highlight element connectors and white arrows indicate magma flow pathways. (B) Cross-plot of the maximum element length and the angle  $\alpha_{\text{mean}}$  (cf. Fig. 4B). (C) Cross-plot of the maximum element length and width. Black trend lines showing the ratio between the width and the length (i.e.,  $w/l = 0.25$ ,  $w/l = 0.5$ ,  $w/l = 1$ ,  $w/l = 2$ ), with aspect ratios  $< 1$  indicating elongate geometries, and aspect ratios  $> 1$  indicating wider geometries, highlighted by cartoons (solid black lines). (D) Cross-plot of width/length aspect ratios (C) and  $\alpha_{\text{mean}}$  angles.

Plotted data shows a correlation to a second order polynomial fit (dashed line). Measurement errors in width and length are associated with the horizontal seismic resolution (i.e., 56 m). Error in width-to-length ratios indicate the range of ratios based on minimum and maximum width and length measurements. Since we cannot quantify the error of angle  $\alpha_{\text{mean}}$  measurements, the error is given as 5% of  $\alpha_{\text{mean}}$ . Different element geometries in (B–D) are color-coded (Table S2-4-1, S2-4-2, S2-4-3 and Jupyter notebook S2-4 in the Supplemental Material<sup>1</sup>).

## DISCUSSION

Because comprehensive analyses of the 3D geometries of sub-horizontal sheet intrusions are limited to 1) geophysical techniques such as 3D seismic reflection data and 2) analogue and numerical modelling, it is important to link observations of both approaches together with field observations to unravel magma emplacement processes. Our results reveal distinct element geometries, as well as thickness variations within different orders of elements. We discuss the implications of our results below by considering how sill geometries and 3D seismic reflection data can help to infer sill segmentation mechanisms. We then introduce a conceptual flow and emplacement model for the sills described in this study, based on sill and element geometries.

### Can Seismic Reflection Data Be Used to Infer Sill Segmentation Mechanisms?

Field observations of host rock deformation adjacent to sills indicate the operation of viscous (e.g., host rock fluidization), elastic (e.g., supra-sill strata uplift), and plastic (e.g., shear failure) emplacement mechanisms, which may explain the breakdown of planar igneous sheets into elongate elements (e.g., Schofield et al., 2012a; Magee et al., 2019b and references therein). Fracture segmentation may occur due to stress-rotation ahead of a propagating, magma driven, tensile elastic crack, as well by exploitation of pre-existing weaknesses (e.g., Pollard et al., 1975, 1982; Stephens et al., 2017; Magee et al., 2019b). In the case of fracture propagation, host rocks deform elastically, resulting in forced folds above sill segments due to the uplift of overburden strata (Fig. 1B). In contrast to purely elastic emplacement mechanisms, sedimentary host rocks with low mechanical strength and unconfined to slightly confined pore fluids may accommodate magma emplacement by viscous deformation (e.g., Schofield et al., 2010, 2012a). For example, processes such as thermal host rock fluidization result in a contact between two viscous fluids (i.e.,

magma, fluidized host rock) (e.g., Schofield et al., 2010, 2012a). With continued magma supply, this contact becomes unstable and the relatively low-viscous fluid (i.e., magma) breaks down into finger-like geometries, propagating into the more viscous fluidized host rock (e.g., Saffman and Taylor, 1958; Pollard et al., 1975; Schofield et al., 2010). Alternatively, when high-viscous  
5 magmas intrude into weak host rocks, high shear stresses ahead of the propagating intrusion may cause both brittle and ductile shear failure of the host rock (i.e., viscous indenter model) (e.g., Donnadieu and Merle, 1998; Merle and Donnadieu, 2000; Schofield et al., 2012a; Spacapan et al., 2017; Galland et al., 2019). In this case, magma pushes the host rock ahead because its rigidity is at least as high as that of the host rock. Viscous indentation results in shear failure and folding of  
10 the host rock ahead of the propagating intrusion and is mainly observed in the field when high viscosity, felsic magmas are emplaced into shale units (e.g., Spacapan et al., 2017; Galland et al., 2019).

A key problem with seismic reflection data is that host rock deformation structures typically used to infer sill emplacement mechanisms are rarely imaged in sufficient detail to  
15 interpret their origin. Furthermore, boreholes rarely penetrate sills and, when they do, provide only 1D information on rock properties. To interpret sill emplacement mechanics from seismic reflection data we therefore currently rely on identification of: i) reverse faults that formed to accommodate overburden uplift (e.g., Thomson and Schofield, 2008); and ii) forced folds caused by elastic bending of overburden (e.g., Hansen and Cartwright, 2006b; Galland, 2012; Jackson et  
20 al., 2013; Schmiedel et al., 2017; Reeves et al., 2018; Magee et al., 2019a; Norcliffe et al., 2020). For example, Jackson et al. (2013) suggested that discrepancies between sill thicknesses and forced fold amplitudes may be caused by compaction and/or host rock volume reduction due to pore fluid expulsion, potentially indicating host rock fluidization and ductile flow of host rock. In previous seismic reflection-based studies (e.g., Thomson and Hutton, 2004), contact geometries (i.e., H-  
25 and S-Z-connectors) between elements have been interpreted to form due to tensile brittle fracturing between two inflating, adjacent but vertically offset elements, suggesting magma emplacement through elastic-brittle fractures (e.g., Francis, 1982; Schofield et al., 2012a). However, S-Z connectors have also been observed between vertically offset elements where host rock deformation suggests that magma emplacement processes were not dominated by elastic-  
30 brittle fracturing (e.g., magma fingers in the Neuquén Basin, Argentina) (Galland et al., 2019). Vertically offset elements therefore cannot be used to identify fracture segmentation processes

without additional information about host rock deformation. This finding is especially important for seismic reflection data interpretation, where data and/or observations of host rock deformation is not available and highlights the importance of using the descriptive term *element* when sill emplacement and segmentation mechanisms cannot be identified.

5           Based on our observations of sills in the Exmouth Plateau, we suggest that detailed quantitative measurements of connectors can provide insights into magma emplacement mechanisms. For example, our data indicates that significant variations in vertical element offsets and therefore in connector heights can occur along the length of elements (Fig. 7). Although recognition of vertical offsets cannot be used to determine whether emplacement involved elastic-  
10 brittle fracturing or brittle and/or non-brittle deformation mechanisms (i.e., viscous indentation, host rock fluidization), we can test whether sheet-segmentation was related to stress-field rotation. In particular we expect that if segmentation was due to elastic instabilities, where inhomogeneities and/or anisotropies cause stress-field rotation, the vertical offset of elements should increase continuously along the connector lengths and the arrangement of the elements produces a  
15 consistent stepping direction (Fig. 1D) (e.g., Pollard et al., 1975, 1982; Schofield et al., 2012a; Magee et al., 2019b). When sill segmentation is caused by the exploitation of preferentially oriented, pre-existing structures, magma migrates along surfaces with relatively lower tensile strength and/or fracture toughness (e.g., bedding planes, fractures, faults) (e.g., Schofield et al., 2012a; Stephens et al., 2017), in which case elements have inconsistent stepping directions  
20 (Schofield et al., 2012a; Magee et al., 2019b) and their vertical offsets can be expected to change according to the geometric relation of the host rock surfaces they follow. Quantifying connector geometries and their vertical heights could therefore help to identify stress-field rotation as fracture segmentation mechanism. Maximum vertical connector heights in S1 occur evenly distributed along element lengths (Fig. 7A), indicating that syn-emplacement rotation of principal stress axes  
25 orientations was not the dominant segmentation mechanism for sill S1. This conclusion is supported by the inconsistent stepping direction observed within the S1 element network, indicating that exploitation of pre-existing weaknesses led to vertically offset elements (Figs 5E and 6C) (Schofield et al., 2012a; Magee et al., 2019b).

30           Since both elastic-brittle fracturing but also brittle and/or non-brittle emplacement mechanisms can lead to the exploitation of pre-existing weaknesses, we used seismic attributes to infer host rock properties to better assess potential segmentation mechanisms. For example,

seismic reflections of the Top-sill horizon of S1 show significantly increased amplitudes at shallower levels < 3.8 s TWT (Figs 5A and B). Seismic reflections with relatively higher amplitudes are observed for both distinct and tuned reflections at similar stratigraphic levels (Figs 5B and E), suggesting a relative change from a mechanically strong towards a weaker host rock.

5 Lithological changes plus increasing cementation and compaction with depth can increase the mechanical host rock strength. Such burial effects are associated with a decrease in pore fluid volume which reduces the potential for host rock fluidization and thus non-brittle magma emplacement (Schofield et al., 2010, 2012a). We hypothesize that the relative change towards mechanical weaker host rocks at shallower emplacement depths of approximately 950–1150 m in

10 our data resulted in non-brittle emplacement of S1 and, consequently, the formation of magma fingers.

Our data further indicates that detailed analyses of seismic amplitudes can be used to identify coalesced magma fingers that propagated within the same seismically resolved stratigraphic interval (S2, Fig. 9B). When the sill thickness is below the maximum tuning

15 thickness, increasing and decreasing amplitudes indicate relative sill thickening and thinning, respectively, although the thickness cannot be measured directly. Since magma fingers are slightly convex-upwards, they form cusp-shaped groves at their point of coalescence, resulting in an undulating Top-sill geometry, where the sill is thinner at magma finger contacts (Fig. 1A, 4D). Contact geometries of coalesced magma fingers are therefore expressed as linear features with

20 relatively low amplitudes, oriented in the magma finger long-axis direction (Fig. 8D). These findings are consistent with predictions of synthetic seismic forward models (Magee et al., 2015).

### **What Do Element Geometries Tell Us About Flow Kinematics?**

Magma emplacement and intrusion growth is often described as an incremental process of


25 numerous magma injections over periods up to millions of years (e.g., Biggs et al., 2009; Annen, 2011; Annen et al., 2015; Magee et al., 2016; Cruden et al., 2017; Cruden and Weinberg, 2018; Reeves et al., 2018). Distinct thickness variations suggest that S2 may be composed of three separate consecutive magma pulses, where the first pulse emplaced elements close to the feeder location. When the second and third pulses of magma were injected it fed the propagating sill tip

30 resulting in tip propagation, and led to sill inflation in areas that were previously injected (Fig. 11). Our data indicates that similar thickness variations occur at smaller scales for the different orders

of sub-elements (e.g., adjacent end-members in the element hierarchy) (Figs 8C and 9A). When a single element emerges from a planar sheet it grows in length and thins towards the propagating tip (Fig. 11C). With time and sustained magma supply, elements grow in width and inflate (Fig. 11C). We observe smaller thickness/width aspect ratios closer to the sill tip than toward the center of S2, which further suggests that elements first grow in width before they inflate.

When an element grows in length and width and then inflates, the propagating tip can become unstable, eventually breaking down into multiple smaller elements (Fig. 11B). We note that this can happen in response to both elastic and viscous instabilities (e.g., Pollard et al., 1975; Nicholson and Pollard, 1985; Schofield et al., 2010). The former single element now becomes a feeder tube for a higher-order element and its component sub-elements. Higher-order elements tend to be thicker close to their feeder tube and thin out towards their tips, analogous to lobes in pahoehoe lavas (e.g., Peterson et al., 1994), which are thicker close to their feeding vents, or flow inflation lobes (Hansen and Cartwright, 2006a; Miles and Cartwright, 2010). However, flow inflation lobes are considered to form when sills intrude unconsolidated sediments at shallow emplacement depths (<500 m) and therefore this mechanism may not account for the elements described here, which were emplaced into consolidated sedimentary rocks (~950–1150 m emplacement depth).

Our observations reveal that thicknesses can vary significantly between neighboring elements across multiple orders (e.g., EN1 and EN2 of S2; sub-elements within EN1) (Figs 8C and 9). We suggest that: 1) the emplacement of elements is geometrically self-similar over multiple scales whereby elements with different orders may grow independently, with potentially independent flow kinematics; and 2) neighboring elements either inflate at different rates or different times, which implies that sill growth is incremental down to the smallest seismically resolved member in the element-hierarchy (Fig. 11).

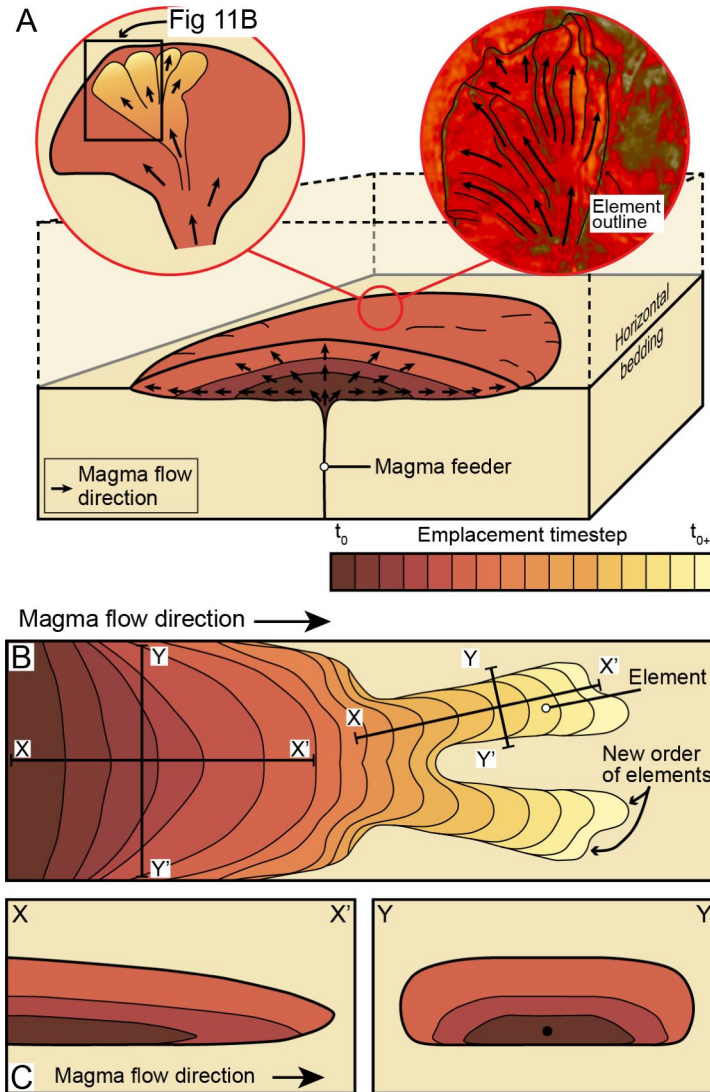

**Figure 11:** Conceptual flow and inflation model of (A) a sill and (B) elements in 3D view and map view, respectively ((A) modified after Ferré et al., 2002). Zoom in (A) shows an element network and containing elements at the propagating sill tip in map view. (B) Magma propagation of an element that breaks down into elongate elements over time. Note that a new order of elements is starting to emerge at the element tips. Contours are based on a numerical study on viscous fingering (modified from Ebrahimi et al., 2016). (C) Cross-section through a feeding tube and emerging elongate elements, parallel (X-X') and perpendicular (Y-Y') to the element long axis. Schematic diagrams are not to scale.

## Sill Emplacement History and Magma Flow Pathways

Seismically resolved sills in the Exmouth Plateau are not penetrated by wells and thus radiogenic isotope ages are not available. However, previous studies on intrusions in the Western Australia volcanic margin suggest they were emplaced during a phase of Late Jurassic-to-Early Cretaceous, rift-related magmatism (e.g., Exon et al., 1992; Mihut and Müller, 1998; Symonds et al., 1998; Magee et al., 2013a; Magee and Jackson, 2020; Norcliffe et al., 2020). The sills analyzed in this study were emplaced close to the upper boundary of the Mungaroo Formation with some inclined limbs cross-cutting the top and intruding the Rhaetian Marl. Paleo-seafloors mapped using sill-induced forced folds indicate that magmatism occurred after the Lower Jurassic, which coincides with previous studies suggesting that magmatism within the North Carnarvon Basin occurred during the Upper Jurassic-to-Early Cretaceous due to a regional phase of rifting (e.g., Exon et al., 1992; Mihut and Müller, 1998; Symonds et al., 1998; Magee et al., 2013a; Magee and Jackson, 2020; Norcliffe et al., 2020). Interpretation of sill-emplacement related forced folds and onlapping sedimentary strata infer a paleo-emplacement depth of  $\sim 4.7\text{--}0.4$  km for the inclined sheet S1 (this study), and  $\sim 0.9$  km for sill S2 (Norcliffe et al., 2020).

Sills in sedimentary basins often form extensive networks (i.e., sill complexes) (e.g., Cartwright and Hansen, 2006; Magee et al., 2016). Sill junctions form where two sills connect, and they can be used to reconstruct magma flow pathways and the overall plumbing system architecture (Hansen et al., 2004). Identifying the feeders of sills that are not fed by other sills is challenging since they often have relatively thin and steeply dipping geometries (e.g., dykes), and as such can only be recognized in high-resolution seismic reflection data as localized areas of low-amplitude reflections disrupting otherwise continuous host rock-related reflections (Magee and Jackson, 2020). In the field, extensive studies of magma flow indicators (e.g., magnetic fabrics, shape preferred orientation of minerals, slickensides) (e.g., Cruden and Launeau, 1994; Cruden et al., 1999; Magee et al., 2018; Galland et al., 2019; Martin et al., 2019) can help to reconstruct magma flow pathways and potential feeder locations. However, intrusions are rarely fully exposed, which makes sample collection and a consistent spatial distribution of data challenging. 3D seismic reflection data allow for mapping of sill geometries, including element connectors (H- and S-Z-connectors), in high detail. Since element connectors form along the lateral margins of elements, it is widely accepted that their orientation is a magma flow pathway indicator. We highlight that contact geometries form between adjacent, vertically offset elements (i.e., segments, magma



fingers), but also between elements that propagate within the same stratigraphic interval (i.e., magma fingers), which allows us to interpret magma flow directions regardless of sill emplacement mechanisms. Here, we use quantitative measurements of these connector geometries to map magma flow pathways, infer potential feeder locations, and to reconstruct a potential  
5 emplacement history for S1 and S2.

### ***Sill S1***

Element-element contacts and thus magma flow directions in S1 can be precisely mapped within a fanning element network at shallower levels, indicating an overall westerly flow direction (Fig. 6). At greater depths, most likely due to a decrease in seismic resolution, only large-scale magma  
10 flow indicators are recognized in the form of potential first-order elements (Fig. 5B). However, based on the available data, we infer that S1 is an inclined sheet that propagated upwards, cross-cutting the host-rock strata, with a feeder(s) located at the deepest levels (i.e., in the SE) (Fig. 5). Magma flowed towards the N to NNE until it reached an area where relatively higher amplitude  
15 reflections may indicate a change in host rock lithology. We infer that this potential change in mechanical properties, possibly defined by a change to a weaker, less brittle host rock, may have allowed for non-brittle deformation processes and potentially the formation of bedding-parallel magma fingers that fanned-out westwards forming a large-scale element network (Figs 5 and 6). Magma fingers propagated along pre-existing weaknesses (e.g., bedding planes), resulting in  
20 vertical offsets and a step-like sill geometry with an inconsistent stepping direction (Fig. 6C). NE-SW striking Jurassic faults influenced magma flow pathways such that magma propagated along pre-existing fault planes, resulting in a localized fault-parallel magma flow. With increasing element inflation, neighboring but vertically offset elements coalesced via H- and S-Z-connectors due to tensile brittle failure of the host rock separator, forming a broadly continuous sheet  
25 containing abrupt intra-sheet steps.

### ***Sill S2***

Radially spreading magma flow pathways suggest that even though clear evidence for magma feeder(s) in cross-section is missing, S2 was fed from a point source along the NE-SW striking  
30 splay off the major tectonic fault bounding the eastern margin of S2 ( $t_0$ ; Figs 8B and 12B-C). When a first pulse of vertically ascending magma interacted with the pre-existing fault plane, localized


rotation of the opening vector ( $\sigma_3$ ) from a sub-horizontal orientation towards an orientation perpendicular to the fault plane resulted in magma propagation along this fault (Fig. 12A, i). Once the ascending magma reached a horizon (e.g., bedding) with a tensile strength and/or fracture toughness lower than that of the intruded fault plane, magma propagated along the interface of host rock layers resulting in the transition to a sub-horizontal sheet intrusion (t1; Fig. 12A, ii-iv) (e.g., Kavanagh et al., 2006, 2015). The obtuse angle between the feeding fault plane and the mechanically weaker horizon in the footwall resulted in a rotation of opening vectors to a sub-vertical orientation, which forced the magma to primarily intrude the footwall in a SE direction (Figs 12A-C). Inflation and associated tensile failure may have caused sill propagation into the hanging wall towards the north (Fig. 12A, iii-iv). Due to a potential second magma pulse, S2 inflated and propagated SW along the fault (strike NE-SW), forming an elongate, channel-like sill geometry (t2; Fig. 12B). This highlights that elongate sill geometries may not always be fed from an underlying linear magma source (i.e., dyke) (e.g., Galerne et al., 2011), but that pre-existing fault planes can have major influence on sill geometries.

Inclined limbs formed along the pre-existing fault plane in the east but also in the west of the sill, where only minor faults in the SW are imaged in the seismic reflection data (t3-t5; Fig. 12C and D). Based on the straight geometry of the western inclined limb we interpret a passive emplacement mechanism in which magma followed pre-existing or sill-inflation related fractures, rather than forceful magma emplacement that forms and subsequently intrudes along new fractures at the propagating sill tip (Malthe-Sørensen et al., 2004; Thomson and Schofield, 2008). Two plausible passive emplacement mechanisms can be considered: i) forced folding induced tensile failure, where inflation uplifts the overburden host rock and magma follows fractures that formed at the point of highest flexure (Thomson and Schofield, 2008); and ii) exploitation of pre-existing faults that are below the seismic resolution (Fig. 12D) (Magee et al., 2013b). Since Jurassic faults on the Exmouth Plateau strike NNE-SSW, similar to the western inclined limb of S2, and given forced folds are observed above S2, we cannot rule out one or the other mechanism based on the available data. Detailed forced fold and fault analyses by Norcliffe et al. (2020) showed that sill inflation of S2 was likely accommodated by a combination of overburden strata uplift and, adjacent to the pre-existing bounding fault in the east, fault inversion and compaction of overburden strata.

Bedding-parallel, in some cases slightly vertically offset elements north of the potential feeder zone formed the first-order element EN1 (t2; Fig. 12B). When elements within this network

grew in width and thickness, brittle tensile failure of the host rock separators resulted in the formation of S-Z-connectors (t3; Fig. 12). During a potential third magma pulse, similar processes formed the first-order element EN2 (t4, t5; Fig. 12). However, in contrast to EN1, individual elements within second-order elements propagated along the same strata (Fig. 9B). Based on this  
5 finding and in combination with thickness/width aspect ratios of 0.02–0.35, we suggest that EN2 comprises second-order elements of coalesced magma fingers, where minor vertical offsets between adjacent second-order elements resulted from the exploitation of pre-existing structures.

A large variation of amplitudes is observed for thicknesses above the limit of separability (Fig. 9D), which we interpret as due to variations in host rock lithology, or sill composition. Since  
10 the latter scenario would likely result in accumulation of distinct amplitude clusters for portions of the sill characterized by a distinct igneous rock composition, we hypothesize that the broad scatter of amplitudes for thicknesses above the limit of separability is more likely to indicate varying host rock lithologies. These changes in host rock lithology could have promoted the formation of elements and may have caused minor vertical offsets, which we observe between the second-order  
15 elements of S2.

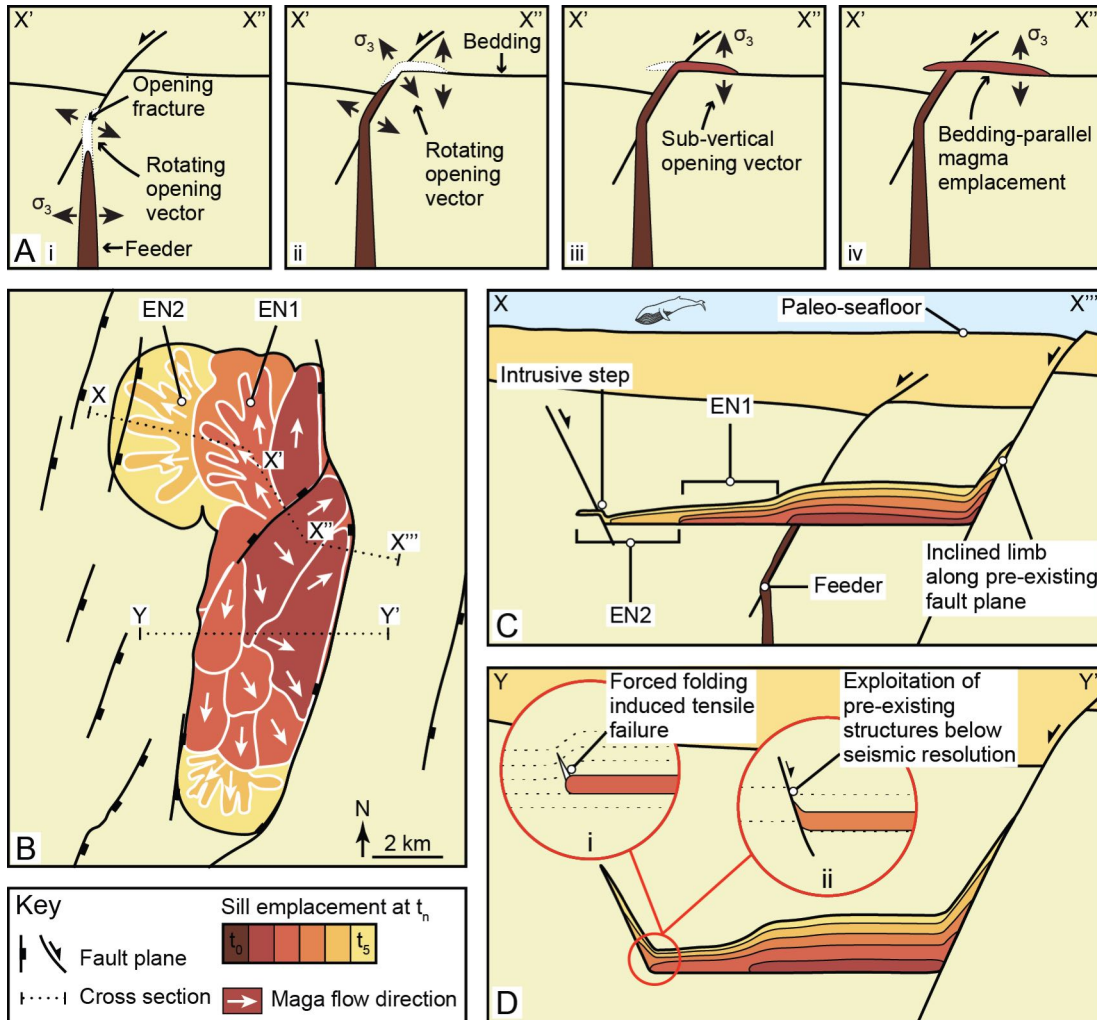

**Figure 12:** Schematic diagram showing how a potential feeding tube interacts with a pre-existing fault plane and subsequently transitions into a bedding-concordant sill. Localized rotation of the opening vector ( $\sigma_3$ ) to an orientation perpendicular to the fault plane (i) and the bedding (ii) may have caused the magma to propagate sub-horizontally, along a bedding plane. (B–D) Schematic diagrams showing the emplacement history of sill S2 in map view (B) and cross-section (C), (D), with different emplacement timesteps color-coded. It is to note that color-coded areas in (B) indicate the outer margin of propagating magma at given timesteps; i.e., even though younger magma pulses seem to be accreted to the edges of the intrusion, they also contributed to sill inflation as highlighted in cross section (C), (D). Cross section locations of (A), (C), and (D) are indicated in (B). Schematic cross-sections are not to scale. Please refer to ‘Sill Emplacement History and Magma Flow Pathways’ for a detailed discussion.

## CONCLUSION

High-quality 3D seismic reflection data from the Exmouth Plateau, offshore NW Australia was used to: i) map basaltic sills and their component elements; ii) document their geometries and seismic expressions; and iii) introduce new descriptive terminology to define different sill elements and connectors based on their geometries. Our key conclusions are:

1. Five basaltic sills of Late Jurassic-to-Early Cretaceous age intruded into Triassic sedimentary rocks of the Mungaroo Fm. (interbedded sandstones and claystones) and the Rhaetian Marl at emplacement depths of ~4.7–0.4 km. The sills are seismically resolved in the Glencoe 3D survey, and they have inclined sheet, saucer-shape, and sub-horizontal sill morphologies.

2. Sub-horizontal, semi-radially fanning element networks occur in two sills where i) an inclined sheet intrudes into a potentially mechanically weaker host rock (S1) or ii) a saucer-shaped sill is bounded by only one inclined limb (S2).

3. Quantifying vertical heights of H- and S-Z-connectors in 3D seismic reflection data provides important insights into sill segmentation mechanisms. This approach helps to identify/exclude syn-emplacement rotation of principal stress axes orientations ahead of a propagating fracture as potential segmentation mechanism.

4. Elongate amplitude variations within elements can indicate coalesced sub-elements even when they are resolved as tuned reflection packages and emplaced at approximately the same stratigraphic level. These findings are in agreement with results of synthetic forward models (Magee et al., 2015) and permit the analysis of flow kinematics in 3D seismic reflection data at meter scale, and help to infer potential sill emplacement mechanisms.

5. Based on quantitative measurements of element geometries, we classified high-order elements into: i) elongate geometries that consistently widen and have width-to-length aspect ratios  $< 1$  (Type 1); and ii) a group of semi-radially fanning elements often fed through a relatively short and narrow tube (Type 2), with width-to-length aspect ratios predominantly  $> 1$ . Quantifying element geometries permits comparisons between different subsurface and field-based datasets covering a range of host rock types and tectonic settings and further allows us to test the predictions of analogue and numerical experiments.

6. Sill thicknesses vary significantly in lateral directions. We characterized sill S2 into three main zones based on their thicknesses, where the sill is thicker close to its feeder. This suggests that incremental emplacement of potentially three magma pulses led to the final sill geometry.

7. Thickness variations between adjacent elements indicate that these features grow and inflate independently and therefore may have had separate flow kinematics.

8. Thickness/width aspect ratios of individual elements at the outer margin of S2 (EN2) are smaller than those measured towards the center of S2 (EN1), suggesting that elements first grow in width before they inflate.

10

## ACKNOWLEDGMENTS

We are grateful to Geoscience Australia for making the seismic reflection and borehole data publicly available from <https://nopims.dmp.wa.gov.au/nopims>. We also thank Down Under GeoSolution and Schlumberger for use of DUG Insight 4 and Petrel seismic interpretation software. JK acknowledges a Monash Graduate Scholarship. ARC, CALJ and CM acknowledge funding from ARC Discovery Grant DP190102422. We thank Andy Bungler for fruitful discussions on element geometries.

## 20 REFERENCES CITED

- Anderson, E.M., 1951, The dynamics of faulting and dyke formation with applications to Britain: Edinburgh, Oliver and Boyd, 206 p.
- Anderson, E.M., 1937, The Dynamics of the Formation of Cone-sheets, Ring-dykes, and Caldron-subsidences: Proceedings of the Royal Society of Edinburgh, v. 56, p. 128–157.
- 25 Annen, C., 2011, Implications of incremental emplacement of magma bodies for magma differentiation, thermal aureole dimensions and plutonism-volcanism relationships: *Tectonophysics*, v. 500, p. 3–10, doi:10.1016/j.tecto.2009.04.010.
- Annen, C., Blundy, J.D., Leuthold, J., and Sparks, R.S.J., 2015, Construction and evolution of igneous bodies: Towards an integrated perspective of crustal magmatism: *Lithos*, v. 230, p. 206–221, doi:10.1016/j.lithos.2015.05.008.
- 30 Bacon, M., Simm, R., and Redshaw, T., 2007, 3-D Seismic Interpretation: Cambridge University Press, 225 p.



- Barnes, S.J., Cruden, A.R., Arndt, N., and Saumur, B.M., 2016, The mineral system approach applied to magmatic Ni–Cu–PGE sulphide deposits: *Ore Geology Reviews*, v. 76, p. 296–316, doi:10.1016/j.oregeorev.2015.06.012.
- 5 Berndt, C., Skogly, O.P., Planke, S., and Eldholm, O., 2000, High-velocity breakup-related sills in the Vøring Basin, off Norway: *Journal of Geophysical Research*, v. 105, p. 28,443–28,454.
- Bertelsen, H.S., Rogers, B.D., Galland, O., Dumazer, G., and Abbana Benanni, A., 2018, Laboratory Modeling of Coeval Brittle and Ductile Deformation During Magma Emplacement Into Viscoelastic Rocks: *Frontiers in Earth Science*, v. 6, doi:10.3389/feart.2018.00199.
- 10 Biggs, J., Anthony, E.Y., and Ebinger, C.J., 2009, Multiple inflation and deflation events at Kenyan volcanoes, East African Rift: *Geology*, v. 37, p. 979–982, doi:10.1130/G30133A.1.
- Bilal, A., McClay, K.E.N., and Scarselli, N., 2018, Fault-scarp degradation in the central exmouth plateau, north west shelf, australia: *Geological Society Special Publication*, v. 476, p. 231–257, doi:10.1144/SP476.11.
- 15 Black, M., McCormack, K.D., Elders, C., and Robertson, D., 2017, Extensional fault evolution within the Exmouth Sub-basin, North West Shelf, Australia: *Marine and Petroleum Geology*, v. 85, p. 301–315, doi:10.1016/j.marpetgeo.2017.05.022.
- Brown, A.R., 2011, Interpretation of three-dimensional seismic (S. E. Laubach & V. Grechka, Eds.): *The American Association of Petroleum Geologists and the Society of Exploration Geophysicists*, 615 p.
- 20 Bunger, A.P., and Cruden, A.R., 2011, Modeling the growth of laccoliths and large mafic sills: Role of magma body forces: *Journal of Geophysical Research*, v. 116, p. 1–18, doi:10.1029/2010JB007648.
- Cartwright, J., and Hansen, D.M., 2006, Magma transport through the crust via interconnected sill complexes: *Geology*, v. 34, p. 929–932, doi:10.1130/G22758A.1.
- 25 Cashman, K.V., Stephen, R., and Sparks, J., 2013, How volcanoes work: A 25 year perspective: *Bulletin of the Geological Society of America*, v. 125, p. 664–690, doi:10.1130/B30720.1.
- Chanceaux, L., and Menand, T., 2014, Solidification effects on sill formation: An experimental approach: *Earth and Planetary Science Letters*, v. 403, p. 79–88, doi:10.1016/j.epsl.2014.06.018.
- 30 Chanceaux, L., and Menand, T., 2016, The effects of solidification on sill propagation dynamics and morphology: *Earth and Planetary Science Letters*, v. 442, p. 39–50, doi:10.1016/j.epsl.2016.02.044.
- Cruden, A.R., and Launeau, P., 1994, Structure, magnetic fabric and emplacement of the Archean Lebel Stock, SW Abitibi Greenstone Belt: *Journal of Structural Geology*, v. 16, p. 766–691.

- Cruden, A.R., McCaffrey, K.J.W., and Bungler, A.P., 2017, Geometric Scaling of Tabular Igneous Intrusions: Implications for Emplacement and Growth, *in* Breitzkreuz, C. and Rocchi, S. eds., *Physical Geology of Shallow Magmatic Systems*, p. 11–38, doi:10.1007/11157\_2017\_1000.
- 5 Cruden, A.R., Tobisch, O.T., and Launeau, P., 1999, Magnetic fabric evidence for conduit-fed emplacement of a tabular intrusion: Dinkey Creek Pluton, central Sierra Nevada batholith, California: *Journal of Geophysical Research*, v. 104, p. 10,511-10,530, doi:10.1029/1998JB900093.
- 10 Cruden, A.R., and Weinberg, R.F., 2018, Mechanisms of Magma Transport and Storage in the Lower and Middle Crust - Magma Segregation, Ascent and Emplacement, *in* Burchardt, S. ed., *Volcanic and Igneous Plumbing Systems*, Elsevier, p. 13–53, doi:10.1016/B978-0-12-809749-6.00001-7.
- Currier, R.M., and Marsh, B.D., 2015, Mapping real time growth of experimental laccoliths: The effect of solidification on the mechanics of magmatic intrusion: *Journal of Volcanology and Geothermal Research*, v. 302, p. 211–224, doi:10.1016/j.jvolgeores.2015.07.009.
- 15 Delaney, P.T., and Pollard, D.D., 1982, Deformation of host rocks and flow of magma during growth of minette dikes and breccia-bearing intrusions near Ship Rock, New Mexico.: *US Geological Survey Professional Paper*, v. 1202, p. 61.
- Donnadieu, F., and Merle, O., 1998, Experiments on the indentation process during cryptodome intrusions: New insights into Mount St. Helens deformation: *Geology*, v. 26, p. 79–82, doi:10.1130/0091-7613(1998)026<0079:EOTIPD>2.3.CO.
- 20 Ebrahimi, B., Mostaghimi, P., Gholamian, H., and Sadeghy, K., 2016, Viscous fingering in yield stress fluids: a numerical study: *Journal of Engineering Mathematics*, v. 97, p. 161–176, doi:10.1007/s10665-015-9803-0.
- Eide, C.H., Schofield, N., Jerram, D.A., and Howell, J.A., 2017, Basin-scale architecture of deeply emplaced sill complexes: Jameson Land, East Greenland: *Journal of the Geological Society*, v. 174, p. 23–40, doi:10.1144/jgs2016-018.
- 25 Eide, C.H., Schofield, N., Lecomte, I., Buckley, S.J., and Howell, J.A., 2018, Seismic interpretation of sill complexes in sedimentary basins: implications for the sub-sill imaging problem: *Journal of the Geological Society*, v. 175, p. 193–209, doi:10.1144/jgs2017-096.
- Ernst, R.E., Buchan, K.L., and Campbell, I.H., 2005, *Frontiers in Large Igneous Province research: Lithos*, v. 79, p. 271–297, doi:10.1016/j.lithos.2004.09.004.
- 30 Exon, N.F., and Buffler, R.T., 1992, Mesozoic Seismic Stratigraphy and Tectonic Evolution of the Western Exmouth Plateau: *Proceedings of the Ocean Drilling Program, Scientific Results*, v. 122, p. 61–81, doi:10.2973/odp.proc.sr.122.125.1992.

- Exon, N.F., Haq, B.U., and von Rad, U., 1992, Exmouth Plateau Revisited: Scientific Drilling and Geological Framework: Proceedings of the Ocean Drilling Program, Scientific Results, v. 122, p. 3–20, doi:10.2973/odp.proc.sr.122.194.1992.
- 5 Ferré, E.C., Bordarier, C., and Marsh, J.S., 2002, Magma flow inferred from AMS fabrics in a layered mafic sill, Insizwa, South Africa: *Tectonophysics*, v. 354, p. 1–23.
- Francis, E.H., 1982, Magma and sediment - I. Emplacement mechanism of late Carboniferous tholeiite sills in northern Britain.: *Journal of the Geological Society*, v. 139, p. 1–20, doi:10.1144/gsjgs.139.1.0001.
- 10 Galerne, C.Y., Galland, O., Neumann, E.R., and Planke, S., 2011, 3D relationships between sills and their feeders: Evidence from the Golden Valley Sill Complex (Karoo Basin) and experimental modelling: *Journal of Volcanology and Geothermal Research*, v. 202, p. 189–199, doi:10.1016/j.jvolgeores.2011.02.006.
- Galland, O., 2012, Experimental modelling of ground deformation associated with shallow magma intrusions: *Earth and Planetary Science Letters*, v. 317–318, p. 145–156, doi:10.1016/j.epsl.2011.10.017.
- 15 Galland, O., Spacapan, J.B., Rabbal, O., Mair, K., Soto, F.G., Eiken, T., Schiuma, M., and Leanza, H.A., 2019, Structure, emplacement mechanism and magma-flow significance of igneous fingers – Implications for sill emplacement in sedimentary basins: *Journal of Structural Geology*, v. 124, p. 120–135, doi:10.1016/j.jsg.2019.04.013.
- 20 Guo, R., Zhang, G., Zhang, J., Zhao, X., Liu, J., Yuan, D., and Song, S., 2013, Fingered Intrusion of Shallow Saucer-shaped Igneous Sills: Insights from the Jiaojiang Sag, East China Sea: *Acta Geologica Sinica*, v. 87, p. 1306–1318, doi:10.1111/1755-6724.12130.
- Hansen, D.M., and Cartwright, J., 2006a, Saucer-shaped sill with lobate morphology revealed by 3D seismic data: implications for resolving a shallow-level sill emplacement mechanism: *Journal of the Geological Society, London*, v. 163, p. 509–523, doi:10.1144/0016-764905-073.
- 25 Hansen, D.M., and Cartwright, J., 2006b, The three-dimensional geometry and growth of forced folds above saucer-shaped igneous sills: *Journal of Structural Geology*, v. 28, p. 1520–1535, doi:10.1016/j.jsg.2006.04.004.
- Hansen, D.M., Cartwright, J.A., and Thomas, D., 2004, 3D Seismic Analysis of the Geometry of Igneous Sills and Sill Junction Relationships: *Geological Society, London, Memoir*, v. 29, p. 199–208, doi:10.1144/GSL.MEM.2004.029.01.19.
- 30 Hernández, P.A., Notsu, K., Salazar, J.M., Mori, T., Natale, G., Okada, H., Virgili, G., Shimoike, Y., Sato, M., and Pérez, N.M., 2001, Carbon dioxide degassing by advective flow from Usu Volcano, Japan: *Science*, v. 292, p. 83–86, doi:10.1126/science.1058450.

- Horsman, E., Broda, R.J., Gwyn, N.Z., Maurer, E.A., Thornton, E.D., and Ward, M.T., 2016, Progressive Construction of Laccolithic Intrusive Centers: , Utah, U.S.A, *in* Breikreuz, C. and Rocchi, S. eds., *Physical Geology of Shallow Magmatic Systems*, Cham, Springer International Publishing, *Advances in Volcanology*, p. 327–347, doi:10.1007/11157\_2016\_18.
- 5 Hutton, D.H.W., 2009, Insights into magmatism in volcanic margins: bridge structures and a new mechanism of basic sill emplacement - Theron Mountains, Antarctica: *Petroleum Geoscience*, v. 15, p. 269–278, doi:10.1144/1354-079309-841.
- Ilyinskaya, E. et al., 2017, Understanding the environmental impacts of large fissure eruptions: Aerosol and gas emissions from the 2014–2015 Holuhraun eruption (Iceland): *Earth and Planetary*  
10 *Science Letters*, v. 472, p. 309–322, doi:10.1016/j.epsl.2017.05.025.
- Jackson, C.A.L., Schofield, N., and Golenkov, B., 2013, Geometry and controls on the development of igneous sill-related forced folds: A 2-D seismic reflection case study from offshore southern Australia: *Bulletin of the Geological Society of America*, v. 125, p. 1874–1890, doi:10.1130/B30833.1.
- 15 Karner, G.D., and Driscoll, N.W., 1999, Style, timing and distribution of tectonic deformation across the Exmouth Plateau, northwest Australia, determined from stratal architecture and quantitative basin modelling: v. 164, 271–311 p., doi:10.1144/GSL.SP.1999.164.01.14.
- Kavanagh, J.L., Boutelier, D., and Cruden, A.R., 2015, The mechanics of sill inception, propagation and growth: Experimental evidence for rapid reduction in magmatic overpressure: *Earth and*  
20 *Planetary Science Letters*, v. 421, p. 117–128, doi:10.1016/j.epsl.2015.03.038.
- Kavanagh, J.L., Menand, T., and Sparks, R.S.J., 2006, An experimental investigation of sill formation and propagation in layered elastic media: *Earth and Planetary Science Letters*, v. 245, p. 799–813, doi:10.1016/j.epsl.2006.03.025.
- Leat, P.T., 2008, On the long-distance transport of Ferrar magmas: *Geological Society Special*  
25 *Publication*, v. 302, p. 45–61, doi:10.1144/SP302.4.
- Lebedeva-Ivanova, N., Polteau, S., Bellwald, B., Planke, S., Berndt, C., and Stokke, H.H., 2018, Toward one-meter resolution in 3D seismic: *The Leading Edge*, v. 37, p. 818–828, doi:10.1190/tle37110818.1.
- Lister, J.R., and Kerr, R.C., 1991, Fluid-mechanical models of crack propagation and their application to  
30 magma transport in dykes: *Journal of Geophysical Research*, v. 96, p. 10,049–10,077, doi:10.1029/91jb00600.
- Longley, I.M. et al., 2002, The North West Shelf of Australia - A Woodside Perspective, *in* *The Sedimentary Basins of Western Australia 3: Proceedings of the Petroleum Exploration Society of Australia Symposium*, Perth, p. 27–88.

- Magee, C. et al., 2016, Lateral magma flow in mafic sill complexes: *Geosphere*, v. 12, p. 1–33, doi:10.1130/GES01256.1.
- Magee, C. et al., 2018, Magma Plumbing Systems: A Geophysical Perspective: *Journal of Petrology*, v. 59, p. 1217–1251, doi:10.1093/petrology/egy064.
- 5 Magee, C., Briggs, F., and Jackson, C.A.-L., 2013a, Lithological controls on igneous intrusion-induced ground deformation: *Journal of the Geological Society*, v. 170, p. 853–856, doi:10.1144/jgs2013-029.
- Magee, C., Hoggett, M., Jackson, C.A.L., and Jones, S.M., 2019a, Burial-related compaction modifies intrusion-induced forced folds: Implications for reconciling roof uplift mechanisms using seismic reflection data: *Frontiers in Earth Science*, v. 7, p. 1–16, doi:10.3389/feart.2019.00037.
- 10 Magee, C., and Jackson, C.A.L., 2020, Seismic reflection data reveal the 3D structure of the newly discovered Exmouth Dyke Swarm, offshore NW Australia: *Solid Earth*, v. 11, p. 579–606, doi:10.5194/se-11-579-2020.
- Magee, C., Jackson, C.A.-L., Hardman, J.P., and Reeve, M.T., 2017, Decoding sill emplacement and forced fold growth in the Exmouth Sub-basin, offshore northwest Australia: Implications for hydrocarbon exploration: *Interpretation*, v. 5, p. SK11–SK22, doi:10.1190/INT-2016-0133.1.
- 15 Magee, C., Jackson, C.A.L., and Schofield, N., 2014, Diachronous sub-volcanic intrusion along deep-water margins: Insights from the Irish Rockall Basin: *Basin Research*, v. 26, p. 85–105, doi:10.1111/bre.12044.
- Magee, C., Jackson, C.A.L., and Schofield, N., 2013b, The influence of normal fault geometry on igneous sill emplacement and morphology: *Geology*, v. 41, p. 407–410, doi:10.1130/G33824.1.
- Magee, C., Maharaj, S.M., Wrona, T., and Jackson, C.A.L., 2015, Controls on the expression of igneous intrusions in seismic reflection data: *Geosphere*, v. 11, p. 1024–1041, doi:10.1130/GES01150.1.
- Magee, C., Muirhead, J., Schofield, N., Walker, R.J., Galland, O., Holford, S., Spacapan, J., Jackson, C.A.L., and McCarthy, W., 2019b, Structural signatures of igneous sheet intrusion propagation: *Journal of Structural Geology*, v. 125, p. 148–154, doi:10.1016/j.jsg.2018.07.010.
- 25 Malthe-Sørenssen, A., Planke, S., Svensen, H., and Jamtveit, B., 2004, Formation of saucer-shaped sills: *Geological Society, London, Special Publication*, v. 234, p. 215–227, doi:doi:10.1144/gsl.sp.2004.234.01.13.
- Martin, S.A., Kavanagh, J.L., Biggin, A.J., and Utley, J.E.P., 2019, The origin and evolution of magnetic fabrics in mafic sills: *Frontiers in Earth Science*, v. 7, p. 1–23, doi:10.3389/feart.2019.00064.
- 30 Merle, O., and Donnadieu, F., 2000, Indentation of volcanic edifices by the ascending magma: *Geological Society, London, Special Publications*, v. 174, p. 43–53, doi:10.1144/GSL.SP.1999.174.01.03.

- Mihut, D., and Müller, R.D., 1998, Volcanic margin formation and Mesozoic rift propagators in the Cuvier Abyssal Plain off Western Australia: *Journal of Geophysical Research*, v. 103, p. 27135–27149, doi:10.1029/97JB02672.
- 5 Miles, A., and Cartwright, J., 2010, Hybrid flow sills: A new mode of igneous sheet intrusion: *Geology*, v. 38, p. 343–346, doi:10.1130/G30414.1.
- Muirhead, J.D., Airoidi, G., Rowland, J.V., and White, J.D.L., 2012, Interconnected sills and inclined sheet intrusions control shallow magma transport in the Ferrar large igneous province, Antarctica: *Bulletin of the Geological Society of America*, v. 124, p. 162–180, doi:10.1130/B30455.1.
- 10 Nicholson, R., and Pollard, D.D., 1985, Dilation and linkage of echelon cracks: *Journal of Structural Geology*, v. 7, p. 583–590, doi:10.1016/0191-8141(85)90030-6.
- Norcliffe, J., Magee, C., Jackson, C., Köpping, J., and Lathrop, B., 2020, Fault inversion can accommodate ground deformation above inflating igneous sills: *EarthArXiv pre-print*, doi:10.31223/X5GC76.
- 15 Peterson, D.W., Holcomb, R.T., Tilling, R.I., and Christiansen, R.L., 1994, Development of lava tubes in the light of observations at Mauna Ulu, Kilauea Volcano, Hawaii: *Bulletin of Volcanology*, v. 56, p. 343–360, doi:10.1007/BF00326461.
- 20 Planke, S., Rasmussen, T., Rey, S.S., and Myklebust, R., 2005, Seismic characteristics and distribution of volcanic intrusions and hydrothermal vent complexes in the Vøring and Møre basins, *in* *Petroleum Geology: North-West Europe and Global Perspectives – Proceedings of the 6th Petroleum Geology Conference*, p. 833–844, doi:10.1144/0060833.
- Pollard, D.D., and Johnson, A.M., 1973, Mechanics of growth of some laccolithic intrusions in the Henry mountains, Utah, II.: *Tectonophysics*, v. 18, p. 311–354, doi:10.1016/0040-1951(73)90051-6.
- 25 Pollard, D.D., Muller, O.H., and Dockstader, D.R., 1975, The form and growth of fingered sheet intrusions: *Bulletin of the Geological Society of America*, v. 86, p. 351–363, doi:10.1130/0016-7606(1975)86<351:TFAGOF>2.0.CO;2.
- Pollard, D.D., Segall, P., and Delaney, P.T., 1982, Formation and interpretation of dilatant echelon cracks.: *Geological Society of America Bulletin*, v. 93, p. 1291–1303, doi:10.1130/0016-7606(1982)93<1291:FAIODE>2.0.CO;2.
- 30 Reeves, J., Magee, C., and Jackson, C.A., 2018, Unravelling intrusion-induced forced fold kinematics and ground deformation using 3D seismic reflection data: *Volcanica*, v. 1, p. 1–17, doi:10.30909/vol.01.01.0117.
- Rey, S.S., Planke, S., Symonds, P.A., and Faleide, J.I., 2008, Seismic volcanostratigraphy of the Gascoyne margin, Western Australia: *Journal of Volcanology and Geothermal Research*, v. 172, p. 112–131, doi:10.1016/j.jvolgeores.2006.11.013.



- Rickwood, P.C., 1990, The anatomy of a dyke and the determination of propagation and magma flow directions, *in* Parker, A.J., Rickwood, P.C., and Tucker, D.H. eds., *Mafic Dykes and Emplacement Mechanisms*, Rotterdam, Balkema, p. 81–100.
- 5 Rohrman, M., 2013, Intrusive large igneous provinces below sedimentary basins: An example from the Exmouth Plateau (NW Australia): *Journal of Geophysical Research: Solid Earth*, v. 118, p. 4477–4487, doi:10.1002/jgrb.50298.
- Saffman, P.G., and Taylor, G.I., 1958, The penetration of a fluid into a porous medium or Hele-Shaw cell containing a more viscous liquid: *Dynamics of Curved Fronts*, v. 245, p. 312–329, doi:10.1016/B978-0-08-092523-3.50017-4.
- 10 Schmidt, A. et al., 2015, Satellite detection, long-range transport, and air quality impacts of volcanic sulfur dioxide from the 2014–2015 flood lava eruption at Bárðarbunga (Iceland) Anja: *Journal of Geophysical Research: Atmospheres*, v. 120, p. 9739–9757, doi:10.1002/2015JD023638.
- Schmiedel, T., Kjoberg, S., Planke, S., Magee, C., Galland, O., Schofield, N., Jackson, C.A.-L., and Jerram, D.A., 2017, Mechanisms of overburden deformation associated with the emplacement of the Tulipan sill, mid-Norwegian margin: *Interpretation*, v. 5, p. SK23–SK38, doi:10.1190/INT-2016-0155.1.
- 15 Schofield, N. et al., 2017, Regional magma plumbing and emplacement mechanisms of the Faroe-Shetland Sill Complex: implications for magma transport and petroleum systems within sedimentary basins: *Basin Research*, v. 29, p. 41–63, doi:10.1111/bre.12164.
- 20 Schofield, N.J., Brown, D.J., Magee, C., and Stevenson, C.T., 2012a, Sill morphology and comparison of brittle and non-brittle emplacement mechanisms: *Journal of the Geological Society*, v. 169, p. 127–141, doi:10.1144/0016-76492011-078.
- Schofield, N.J., Heaton, L., Holford, S.P., Archer, S.G., Jackson, C.A.-L., and Jolley, D.W., 2012b, Seismic imaging of ‘broken bridges’: linking seismic to outcrop-scale investigations of intrusive magma lobes: *Journal of the Geological Society*, v. 169, p. 421–426, doi:10.1144/0016-76492011-150.
- 25 Schofield, N.J., Stevenson, C., and Reston, T., 2010, Magma fingers and host rock fluidization in the emplacement of sills: *Geology*, v. 38, p. 63–66, doi:10.1130/G30142.1.
- Skogly, O.P., 1998, Seismic characterization and emplacement of intrusives in the Vøring Basin [PhD thesis]: University of Oslo.
- 30 Smallwood, J.R., and Maresh, J., 2002, The properties, morphology and distribution of igneous sills: modelling, borehole data and 3D seismic from the Faroe-Shetland area: *Geological Society, London, Special Publications*, v. 197, p. 271–306, doi:10.1144/GSL.SP.2002.197.01.11.

- Souche, A., Galland, O., Haug, Ø.T., and Dabrowski, M., 2019, Impact of host rock heterogeneity on failure around pressurized conduits: Implications for finger-shaped magmatic intrusions: *Tectonophysics*, v. 765, p. 52–63, doi:10.1016/j.tecto.2019.05.016.
- 5 Spacapan, J.B., Galland, O., Leanza, H.A., and Planke, S., 2017, Igneous sill and finger emplacement mechanism in shale-dominated formations: a field study at Cuesta del Chihuido, Neuquén Basin, Argentina: *Journal of the Geological Society*, v. 174, p. 422–433, doi:10.1144/jgs2016-056.
- 10 Spacapan, J.B., Palma, J.O., Galland, O., Manceda, R., Rocha, E., D’Odorico, A., and Leanza, H.A., 2018, Thermal impact of igneous sill-complexes on organic-rich formations and implications for petroleum systems: A case study in the northern Neuquén Basin, Argentina: *Marine and Petroleum Geology*, v. 91, p. 519–531, doi:10.1016/j.marpetgeo.2018.01.018.
- Sparks, R.S.J., 2003, Forecasting volcanic eruptions: *Earth and Planetary Science Letters*, v. 210, p. 1–15, doi:10.1016/S0012-821X(03)00124-9.
- 15 Stagg, H.M.J., Alcock, M.B., Bernardel, G., Moore, A.M.G., Symonds, P.A., and Exon, N.F., 2004, Geological Framework of the Outer Exmouth Plateau and Adjacent Ocean Basins: *Petroleum & Marine Division, Geoscience Australia*.
- Stephens, T.L., Walker, R.J., Healy, D., Bubeck, A., England, R.W., and McCaffrey, K.J.W., 2017, Igneous sills record far-field and near-field stress interactions during volcano construction: Isle of Mull, Scotland: *Earth and Planetary Science Letters*, doi:10.1016/j.epsl.2017.09.003.
- 20 Symonds, P.A., Planke, S., Frey, O., and Skogseid, J., 1998, Volcanic Evolution of the Western Australian Continental Margin and its Implications for Basin Development, *in The Sedimentary Basins of Western Australia II*, p. 33–55.
- Takada, A., 1990, Experimental study on propagation of liquid-filled crack in gelatin: shape and velocity in hydrostatic stress condition: *Journal of Geophysical Research*, v. 95, p. 8471–8481, doi:10.1029/JB095iB06p08471.
- 25 Thomson, K., and Hutton, D., 2004, Geometry and growth of sill complexes: Insights using 3D seismic from the North Rockall Trough: *Bulletin of Volcanology*, v. 66, p. 364–375, doi:10.1007/s00445-003-0320-z.
- 30 Thomson, K., and Schofield, N., 2008, Lithological and structural controls on the emplacement and morphology of sills in sedimentary basins: *Geological Society, London, Special Publications*, v. 302, p. 31–44, doi:10.1144/SP302.3.
- Tindale, K., Newell, N., Keall, J., and Smith, N., 1998, Structural Evolution and Charge History of the Exmouth Sub-basin, Northern Carnarvon Basin, Western Australia.: *The sedimentary basins of Western Australia: Proceedings of the Petroleum Exploration Society of Australia Symposium*, Perth, Australia, v. 2, p. 447–472.

Walker, R.J., and Gill, S.P.A., 2020, Tectonic stress controls saucer-shaped sill geometry and emplacement mechanism: *Geology*, v. XX, p. 1–5, doi:10.1130/g47604.1.