

Why do we have so many different hydrological models? A review based on the case of Switzerland

Pascal Horton*¹, Bettina Schaefli¹, and Martina Kauzlaric¹

¹Institute of Geography, Oeschger Centre for Climate Change Research,
University of Bern, Bern, Switzerland (pascal.horton@giub.unibe.ch)

This is a preprint of a manuscript submitted to WIREs Water.

Abstract

Hydrology plays a central role in applied as well as fundamental environmental sciences, but it is well known to suffer from an overwhelming diversity of models, in particular to simulate streamflow. Based on Switzerland's example, we discuss here in detail how such diversity did arise even at the scale of such a small country. The case study's relevance stems from the fact that Switzerland shows a relatively high density of academic and research institutes active in the field of hydrology, which led to an evolution of hydrological models that stands exemplarily for the diversification that arose at a larger scale. Our analysis summarizes the main driving forces behind this evolution, discusses drawbacks and advantages of model diversity and depicts possible future evolutions. Although convenience seems to be the main driver so far, we see potential change in the future with the advent of facilitated collaboration through open sourcing and code sharing platforms. We anticipate that this review, in particular, helps researchers from other fields to understand better why hydrologists have so many different models.

1 Introduction

Hydrological models are essential tools for hydrologists, be it for operational flood forecasting, water resource management or the assessment of land use and climate change impacts. Since the advent of hydrological modelling, the number of models keeps increasing at a fast pace. It has become common to talk about the "plethora of hydrological models" (index term found more than 13'400 times in a Google search on 11 Jan 2021). Single models are branching out into numerous variants, such as the Hydrologiska Byråns Vattenbalansavdelning model (HBV; [Bergström, 1976, 1992, 1995](#); [Lindström et al., 1997](#)) that exists in multiple versions nowadays. Some authors support the idea that there are too many hydrological models, which might lead to a waste of time and effort, and that the hydrological community should gather on a Community Hydrological Model ([Weiler and Beven, 2015](#)).

While any newcomer to hydrological modelling will easily find some guidance on navigating the sheer diversity of hydrological models, understanding the concepts and limitations ([Beven and Young, 2013](#); [Solomatine and Wagener, 2011](#); [Kauffeldt et al., 2016](#)), the question of how this diversity has emerged receives much less attention. Existing historical analyses of model diversity ([Peel and McMahon, 2020](#)) generally focus on the technical evolution of model types. According to our personal experience, much of the knowledge about why many similar models have emerged is transferred informally.

One of the key drivers for the pronounced model diversity in hydrology is certainly the wide range of model applications ([Weiler and Beven, 2015](#)) that all require *appropriate modelling*; this concept can be defined following [Rosbjerg and Madsen \(2005\)](#) as "the development or selection of a model with a degree of sophistication that reflects the actual needs for modelling results". Two well-accepted characteristics that models should exhibit are parsimony and adequacy to the problem at hand, i.e. a model should not be more complex than necessary and should be fit-for-purpose ([Beven and Young, 2013](#)). Indeed, a model developed for droughts cannot be blindly applied to the assessment of floods. Also, catchments with different properties or climatology may require different model structures ([Kavetski and Fenicia, 2011a](#); [van Esse et al., 2013](#)). In other words, the hydrological model diversification is strongly driven by the modelling context and by what is now often called *uniqueness of place* ([Beven, 2000](#)).

However, the hydrologic literature also offers other explanations, ranging from legacy reasons for model selection ([Addor and Melsen, 2019](#)), to a lack of agreement on concepts for process representations and to the simple wish to try to do better with yet another model parameterization ([Weiler and Beven, 2015](#)).

We attempt here an analysis of what might explain the emergence of multiple hydrological models at a rather small scale, the scale of Switzerland, a country small enough to do an

exhaustive analysis, but diverse enough to shed light on some of the most dominant drivers of model diversity. Despite Switzerland's small area (41285 km²), numerous models are being developed and applied in the same contexts and often even for the same purpose and the same catchment.

Thus, this work aims to disentangle the motivations and reasons behind the choices that led to the current co-existence of a wide range of models. We focus this analysis on hydrological models (see Box 1) that simulate hydrological processes, including surface and subsurface flow, and the resulting streamflow at the catchment scale. Some of these models are classical rainfall-runoff models (Box 1), while others have more specific purposes. We exclude here models that simulate the water balance without providing streamflow at the catchment outlet. We first briefly present the different models used in Switzerland (Section 2), and attempt a classification according to types of application and research fields (Section 3), before presenting a synthesis of our findings on drivers of model diversity (Section 4) and conclusions (Section 4).

Box 1: What do we mean by hydrological model ?

A hydrological model is an input-output model that simulates the evolution of water storage, of water fluxes and potentially of associated chemical and physical properties at the Earth's surface and subsurface, based on the water balance equation. The term "rainfall-runoff model" is often used for hydrologic models that simulate streamflow at a catchment outlet based on input time series of rainfall. The term "rainfall-runoff" stems from the early times when such models simulated how much water of a rainfall event ran off to the stream (rather than being stored in the catchment), i.e. "runoff" designated the part of rainfall that appears as streamflow (WMO, 1992). Nowadays, rainfall-runoff models are continuous simulation tools that simulate all components of streamflow (including baseflow), and the term "runoff" now designates the lateral (as opposed to vertical) movement of water (at the surface or in the subsurface) towards a river (WMO, 2012). Modern rainfall-runoff models further transform simulated hillslope-scale runoff to catchment-scale streamflow; some of them include in-stream routing. Such models can be generalized to precipitation-runoff models in the presence of snowfall. The term "water balance model" is sometimes used as synonym for rainfall-runoff models (Boughton, 2004). The correcter term "rainfall-streamflow" model appeared rather early (Young and Minchin, 1991) but is to date (12 Jan 2021) only used in 17 WebOfScience publications. Streamflow is in many papers called interchangeably "discharge" and sometimes even "runoff", which is a legacy effect.

2 Hydrological models developed and used in Switzerland

2.1 Preliminary remark

The information sources considered in this analysis are as far as possible peer-reviewed articles with applications to hydrology. The articles were retrieved based on searches by authors (hydrologists in Switzerland) and keywords. While we tried to search all applications as exhaustively as possible, biases in the search and citing network effects are possible if not likely. Where necessary, conference proceedings, PhD theses, research and government reports are also included. A few models are exclusively used or developed in engineering companies, and these are not included here. Furthermore, our analysis focuses on catchment-scale modelling and excludes studies that focus on hydrogeological modelling (Carlier et al.,

Table 1.

Model name	Full name	Spatial structure	Type of
ALPINE3D	ALPINE3D	distributed	D
CemaNeige-GR6J	CemaNeige - Genie Rural à 6 paramètres Journalier	lumped	A-CH
DECIPHER	Dynamic fluxEs and Connectivity for Predictions of HydRology	HRU-based	E
GERM	Glacier Evolution Runoff Mode	distributed	D
GSM-SOCONT	Glacier and SnowMelt SOil CONTRibution model	semi-distributed	D
HBV	Hydrologiska Byråns Vattenbalansavdelning	semi-distributed	A
HBV-light	Hydrologiska Byråns Vattenbalansavdelning - light	semi-distributed	E
HYPE	HYdrological Predictions for the Environment	semi-distributed	A
LISFLOOD	LISFLOOD	distributed	A
LARSIM	Large Area Runoff Simulation Model	semi-distributed	A
mHM	meso-scale hydrological model	distributed	A
PREVAH	Precipitation-Runoff-Evapotranspiration HRU Model	HRU-based & distributed	D
RS	Routing System	semi-distributed	D
SEHR-ECHO	Spatially Explicit Hydrologic Response model for ecohydrologic applications	semi-distributed	D
StreamFlow	StreamFlow	distributed	D
SUPERFLEX	SUPERFLEX	(not fixed)	E
SWAT	Soil Water and Assessment Tool	semi-distributed	A-CH
TOPKAPI-ETH	TOPographic Kinematic APproximation and Integration - ETH	distributed	E
VIC	Variable Infiltration Capacity model	distributed	A
WaSiM-ETH	Water Flow and Balance Simulation Model - ETH	distributed	D
wflow	wflow	distributed	A

Table 2. : List of models (alphabetical order) applied in Switzerland; the fourth column indicates whether the model was originally developed (D) or further evolved (E) by teams active at Swiss universities or research institutes, or whether it is only applied to Swiss case studies, either by teams active in Switzerland (A-CH) or teams active abroad (A). References are in the main text and Appendix 1.

2019) and those with a focus on urban hydrology (Peleg et al., 2017) or urban hydrogeology (Schirmer et al., 2013). All articles are not directly referenced in this paper, but a complete table is available in the supplementary material.

2.2 Model overview

There are several hydrological models that have been developed in Switzerland (Table 2), ranging from rainfall-runoff models (PREVAH, GSM-SOCONT, RS, SEHR-ECHO, WaSiM-ETH), to snow-based models (ALPINE3D), glacier-hydrology models (GERM) and water temperature models (StreamFlow). Some models (Table 2) have their roots outside Switzerland but are now actively being developed in Switzerland (HBV-light, TOPKAPI-ETH, SUPERFLEX) or were applied to Swiss case studies (CemaNeige-GR6J, LARSIM, VIC, SWAT, mHM).

All these models are briefly described in Appendix 1. Switzerland being an Alpine country, most of these models include a representation of snow accumulation and melt, some also include glacier-related processes.

2.3 History of hydrological modelling in Switzerland

The early times of hydrological modelling in Switzerland can be situated in the years 1970 to 1990, when model diversity naturally emerged in response to modelling needs. From a hydrological processes perspective, a strong focus was on the simulation of snowmelt

runoff ([Braun and Lang, 1986](#)) as well as on understanding the role of forests in the water cycle ([Keller and Forster, 1991](#); [Forster, 1989](#)). Along with modelling studies in experimental catchments ([Iorgulescu and Jordan, 1994](#)), first model-based climate change ([Bultot et al., 1992](#)) and land-use change ([Jordan et al., 1990](#)) impact studies appeared. Quantitative real-time forecasts for water resources management ([Lugiez et al., 1969](#)) and hydropower production ([Jensen and Lang, 1973](#)) started being based on hydrologic models rather than statistical approaches.

It is worth noting that [Naef \(1977\)](#) presented already a first model intercomparison study, comparing complex and simple models. In fact, model diversity already started interpellating the research community in the late 1970ties and [Naef \(1981\)](#) notably asked: “But, given that the results are good, why do new models continue to be published?”

From a historical analysis (see Supplementary Information), one interesting aspect can be retained: already in the early times of model development, part of the model diversity resulted from the work of geoscientists and engineers not directly specialized in catchment hydrology ([Abednego et al., 1990](#); [Baumgartner et al., 1986](#); [Hager, 1984](#); [Sautier and Delleur, 1980](#)), which partly explains the parallel emergence of similar models.

Additional details on the emergence of hydrological modelling in Switzerland are given in the Supporting Information. For a more general dive into the history of modelling, the reader is referred to the work of Keith Beven ([Beven, 2020b,a](#)).

2.4 Model intercomparison

There are few model intercomparison studies in Switzerland, and none of them led to a preference of one model over the other, which is reflected in the fact that the recent re-evaluation of climate change impact on water resources involved all the major models developed in Switzerland ([FOEN, 2021](#)). The existing model intercomparison studies are classical studies on what we can gain from model complexity in terms of model performance; e.g. [Gurtz et al. \(2003\)](#) compared PREVAH to WaSiM-ETH, [Orth et al. \(2015\)](#) HBV-light to PREVAH and a simple water balance model, [Kobierska et al. \(2013\)](#) ALPINE3D to PREVAH and [Andrianaki et al. \(2019\)](#) SWAT to ALPINE3D and PREVAH.

3 Fields of model application and drivers of diversity

To structure the analysis of model diversity, we attempt here a clustering of modelling studies according to the underlying application. We propose a focus on the following categories of applications or research areas that have received significant attention in Switzerland ([Fig. 1](#)): hydrologic process research ([Section 3.1](#)), real-time forecasting ([Section 3.2](#)), characterization and quantification of floods ([Section 3.3](#)), climate change impact analysis ([Section 3.4](#)), ecohydrology and agricultural water use ([Section 3.5](#)), sediment production and transport ([Section 3.6](#)), analysis of model behaviour and uncertainty analysis ([Section 3.7](#)) and large scale modelling ([Section 3.8](#)).

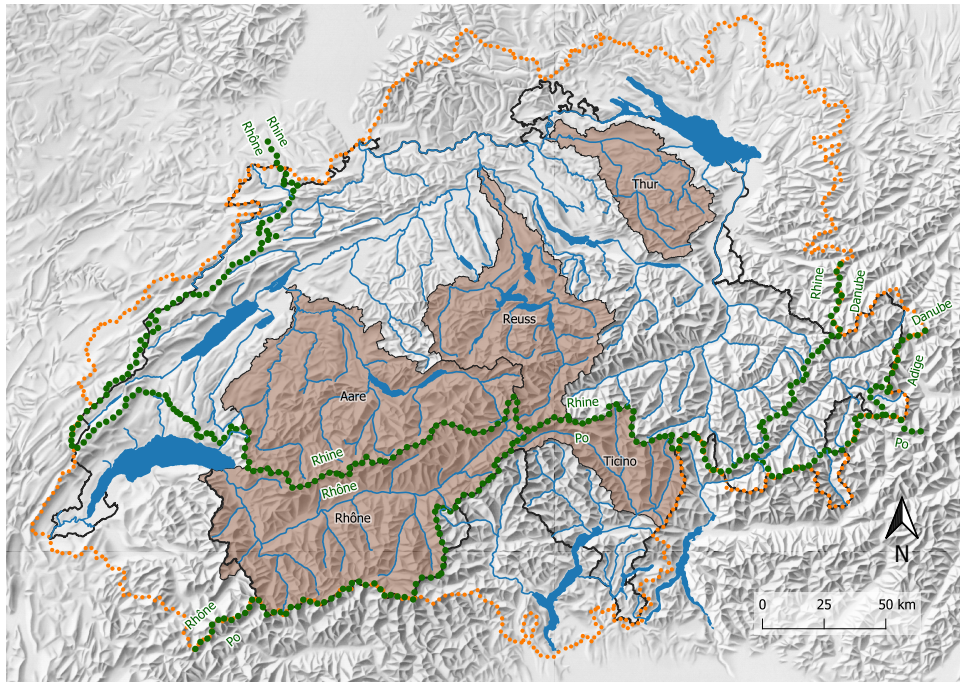


Figure 1 Map of Switzerland with its major drainage divides (green), the extent of the “hydrological Switzerland” (orange) and some catchments (brown) that are referenced in the text (Data: Federal Office of Topography swisstopo and Hydrological Atlas of Switzerland).

3.1 Hydrologic process research

Very few studies use catchment-scale hydrological models to assist hydrological process research and hypothesis testing within a hydrologic model development framework (Clark et al., 2016). This might be explained by the fact that it remains highly challenging to draw conclusions on hydrological processes based on model simulations at the catchment scale; corresponding work rather involves small scale modelling at the hillslope scale (e.g. the study of van den Heuvel et al. 2018 from the US).

One example is the work of Comola et al. (2015b) that analyzes how solar radiation patterns influence the snow-hydrologic response based on two models of different complexity (ALPINE3D and SEHR-ECHO). ALPINE3D was also used by Hindshaw et al. (2011) to attribute the origin of systematic seasonal and diurnal variations in glacial stream water chemistry, and by Brauchli et al. (2017) to assess the influence of small-scale snowmelt variations on the catchment-scale hydrologic response.

Another example of model-assisted process research is the analysis of Paschalis et al. (2014) with TOPKAPI-ETH on the interplay of rainfall's temporal variability and the clustering of saturated areas in flood generation.

Although there are currently few studies of this type, this topic holds potential for significant model diversification since hydrologic process analysis might require model structural changes to allow new hypotheses to be tested. An example is given by Dal Molin et al. (2020), who discusses, based on the SUPERFLEX framework, how to flexibly adapt the model structure to integrate new hypotheses about dominant hydrological processes.

3.2 Real-time forecasting

The ever increasing need for reliable real-time streamflow forecasts leads to a continuous evolution of the underlying hydro-meteorological modelling systems. Real-time forecasting started with deterministic forecasts from a single meteorological forecast applied to a single hydrological model; today, users expect full stochastic ensemble forecasts at hourly time scales, updated every few hours and with several stochastic meteorological inputs applied to different hydrological models (Karsten and Ebel, 2016). Coupled atmospheric–hydrologic ensemble prediction systems were proven to provide better forecasts than deterministic simulations (Verbunt et al., 2007; Zappa et al., 2008; Jaun et al., 2008; Liechti et al., 2013). These might also include data assimilation schemes (Jörg-Hess et al., 2015) or the assessment of hydrologic uncertainty related to meteorological forcings, model parameters and initial conditions (Zappa et al., 2011; Fundel and Zappa, 2011).

Such modern forecasting systems require hydrological models that provide forecasts at many locations in a stream network, that are fast to run, and that include the effect of hydraulic infrastructures (eg. of hydropower water intakes and accumulation lakes). Since the early times of flood forecasting, HBV and PREVAH were used in governmental offices (Karsten and Ebel, 2016) as well as in research institutes because of their relative simplicity and low computational costs (Verbunt et al., 2006; Addor et al., 2011; Murphy et al., 2019; Antonetti et al., 2019).

PREVAH also plays a prominent role in drought forecasting (Fundel et al., 2013; Jörg-Hess et al., 2015; Bogner et al., 2018a) and within the operational Swiss drought information platform (Stähli et al., 2013). Furthermore, it is to date the only model used for subseasonal streamflow forecasts (Monhart et al., 2019; Anghileri et al., 2019), which is still in its infancy in Switzerland.

Despite the dominance of HBV and PREVAH, the considerably more complex WaSiM-ETH model has, however, also been used for research studies on improving flood forecasting in mountainous areas (Jasper and Kaufmann, 2003; Ahrens et al., 2003; Jasper et al., 2002). Along with HBV, PREVAH and LARSIM, WaSiM-ETH is today part of the Swiss operational ensemble forecasting system (Karsten and Ebel, 2016), which uses the FEWS platform (Flood Early Warning System; Werner et al., 2013) to provide forecasts for the cantonal authorities and the public (Swiss Federal Office for the Environment, 2019). A key advantage of the computationally intensive WaSiM-ETH model is the fact that it can explicitly account for lake regulations and hydropower operations (J. Schulla, personal communication, October 23, 2020).

In parallel to the above-mentioned models, RS MINERVE is being used as a specific flood forecasting tool for the upper Rhone river catchment, a large catchment (5220 km², see Fig. 1) strongly influenced by glacier melt and hydropower production (García Hernández et al., 2009b,a; Jordan et al., 2010). Before the recent implementation in WaSiM-ETH and in TOPKAPI-ETH, RS MINERVE was the only operational tool that explicitly modelled the effect of lakes and hydraulic infrastructures.

3.3 Characterization and quantification of floods and droughts

Infrastructure planning, water resources and natural risk management also heavily rely on probabilistic quantifications of extremes, i.e. an estimation of what could happen in terms of floods and droughts and their associated probabilities (called return periods in hydrology). Work in this field continues to be based on statistical analyses and extrapolation of observed streamflow time series (Brunner et al., 2018a; Asadi et al., 2018), but hydrological models play an ever-increasing role to complement missing or insufficient streamflow data.

Any model-based flood estimation method is computationally intensive since long model simulation runs are required at an hourly time step. Accordingly, simple models such as PREVAH (Viviroli et al., 2009c,a; Felder and Weingartner, 2017), HBV-light (Brunner and Sikorska-Senoner, 2019; Sikorska et al., 2017; Sikorska-Senoner et al., 2020) and RS (Zeimet

et al., 2018a, 2017; Bieri and Schleiss, 2013) dominate the Swiss literature on flood estimation; these models are all deemed to perform well enough for flood estimation in Swiss catchments by their respective authors and users.

However, given that all the above simple models rely on similar reservoir-based streamflow simulation methods, there is currently an important modelling effort by Kauszlaric (personal communication) to diversify flood estimation modelling for flood risk assessment, through the further development of the modular and open-source model DECIPHeR for Swiss catchments.

Other complex distributed models are to date only used to study specific flood types that involve a good physical parameterization of small scale processes, such as rain-on-snow flood events, as in the study by Rössler et al. (2014) with WaSiM-ETH.

In addition to the above studies, there are also applications aiming at the reconstruction and/or reproduction of historical floods dating further in the past. The effect of a major volcanic eruption in 1816 on the generation of floods in the upper Rhine basin (see Fig. 1) has been analysed by Rössler and Brönnimann (2018) using WaSiM-ETH. Stucki et al. (2018) reconstructed a large flood of the 19th Century in Ticino with PREVAH coupled with the routing part of RS (the model was chosen because it was already calibrated for the region by Andres et al. (2016)). Ancey et al. (2019) reconstructed the 1818 Giétro glacial lake outburst flood with GERM (which was also ready to use for this area). These examples show that models developed for current day conditions are transposed without further adaptation to historical conditions, similarly as they are transposed to future conditions (see the following section).

Work on droughts is much less abundant in Switzerland than work on floods, which is related to the fact that missing water was, in the past, not a hot topic in this country known as the water tower of Europe (Milano et al., 2015a). What can be highlighted here is that the same models are in use to assess droughts and floods, potentially with specific recalibration, but without modifying the model structure. This is motivated by the fact that existing models are deemed to reproduce well all dominant processes in the Swiss environment, as e.g. explicitly stated in the work of Zappa and Kan (2007) on quantifying the hydrological impact of the 2003 heatwave with a distributed version of PREVAH, later on used for additional drought analyses (Brunner et al., 2019a; Zappa et al., 2019). Similarly, HBV-light served in several drought studies (Staudinger et al., 2014; Staudinger and Seibert, 2014; Staudinger et al., 2015) and was used to assess low flow drivers in Alpine catchments (Arnoux et al., 2020).

However, significant efforts to improve the model representation of groundwater and the corresponding baseflow during droughts remain to be done in Switzerland, which will most probably lead to further model diversification.

3.4 Climate change impact analysis

Climate change impact studies emerged in Switzerland in the 1990s, including a large national research programme on climate change and natural hazards (, SNFS). Since then, all model-based studies are mostly conducted with the models that established themselves in Switzerland, which have, however, not been specifically designed for climate change impact analysis; detailed assessments of how well these models can simulate future conditions are largely missing.

WaSiM-ETH was, for example, chosen by Jasper et al. (2004) to assess the effect of different regional climate scenarios in the Thur and the Ticino catchments (Fig. 1). The model choice is justified by the fact that “from the hydrological point of view of spatially distributed catchment modelling, this model represents the state-of-the-art” and that it “can be successfully applied to a wide range of scales”. WaSiM-ETH has also been applied to assess future soil water patterns (Jasper et al., 2006; Rössler et al., 2012) and future summer evapotranspiration regimes (Calanca et al., 2006). It was even applied for the entire Rhine

basin at a 1 km² resolution down to Rotterdam by [Kleinn et al. \(2005\)](#).

TOPKAPI-ETH, the other frequently used complex distributed model has also been used in several climate change impact applications ([Fatichi et al., 2014, 2015b](#); [Finger et al., 2012](#); [Anghileri et al., 2018](#)).

The most widely used models to study climate change impact on streamflow are to date however the reservoir-based models PREVAH ([Köplin et al. 2012](#); [Bosshard et al. 2013](#); [Speich et al. 2015](#); [Junker et al. 2015](#) and others; see Supplementary material) and HBV-light ([Etter et al. 2017](#); [Hakala et al. 2020](#); [Brunner et al. 2018b](#); [Jenicek et al. 2018](#) and others). In the western part of Switzerland, RS and GSM-SOCONT were used in the past, especially for high elevation sites ([Horton et al., 2006](#); [Uhlmann et al., 2012, 2013](#); [Terrier et al., 2015](#)).

The justification of these models for climate change impact assessments is well summarized by [Köplin et al. \(2010\)](#) who, for PREVAH, states that the model “has been developed especially to suit conditions in mountainous environments” and that it “has proved to be a reliable and flexible tool for various scopes of application and climate conditions ranging from drought analysis over water balance modelling to flood estimation and forecasting”.

It is in the context of climate change impact studies that we see for the first time the use of an internationally well-established model, the SWAT model, with an application to the Upper Rhone river catchment ([Rahman et al., 2014](#)). SWAT was not specifically designed for Alpine environments, but it provides the interesting possibility to study the impact of vegetation-related land-use changes ([Rahman et al., 2015](#)). Later on, SWAT was also applied by [Zarrineh et al. \(2020\)](#) to an agricultural region in Western Switzerland to assess the impact of climate change on streamflow, erosion, and agriculture.

Overall, studies on the impact of vegetation changes remain extremely rare in Switzerland; examples include the analysis of forest change by [Zierl and Bugmann \(2005\)](#) with the ecohydrologic model RHESSys (not further used in Switzerland), by [Köplin et al. \(2013\)](#) and [Schattan et al. \(2013\)](#) with PREVAH and by [Alaoui et al. \(2014\)](#) with WaSiM-ETH. The work of [Milano et al. \(2015b\)](#) with PREVAH is to date the only study accounting also for anthropogenic effects on future water stress.

There is, however, an ample body of literature on the study of glacier retreat impacts on hydrology, which can be seen as a land-use change effect ([Horton et al., 2006](#); [Schaeffli et al., 2007a](#); [Finger et al., 2015](#); [Etter et al., 2017](#); [Addor et al., 2014](#); [Junghans et al., 2011](#)). This namely gave rise to the development of the GERM model ([Huss et al., 2008](#); [Junghans et al., 2011](#); [Farinotti et al., 2012](#); [Finger et al., 2013](#)) and a new glacier retreat parameterization scheme widely applied internationally ([Huss et al., 2010](#)).

The question of how to model the effect of warming on snow accumulation and melt deserves special attention. Most hydrological models used in Switzerland rely on a simple temperature-index based snow routine. A more complex snow routine has been recently implemented in WaSiM-ETH ([Thornton et al., 2019](#)). ALPINE3D, which is built on the physically-based SNOWPACK model ([Lehning et al. 2002a](#); [Bartelt and Lehning 2002a,b](#); [Lehning et al. 2002b](#)), has certainly the most complex representation of snow processes among Swiss models and has been used in several climate change impact applications ([Bavay et al., 2009, 2013](#); [Marty et al., 2017](#)). However, detailed comparisons between simple snow routines and ALPINE3D have not been conclusive so far with respect to climate change applications ([Kobierska et al., 2011](#); [Shakoor et al., 2018](#)). This long-standing question of how to model future snow will most likely see additional model diversification in the future.

In this context, we would like to stress here that there are still relatively few examples of hydrologic model ensembles (using several hydrologic models) for climate change impact assessment ([Kobierska et al., 2011](#); [Addor et al., 2014](#)). The expectations in this regard might raise in the future, requiring the use of additional, and likely internationally widely applied, hydrological models.

3.5 Ecohydrology and agricultural water use

Ecohydrology studies the feedbacks between ecosystems, in particular with vegetation and the water cycle (Tague et al., 2020). To date, catchment-scale studies with ecohydrological models accounting for feedback with vegetation are scarce in Switzerland. An early example is a work of Zierl and Bugmann (2005), who used the model RHESSys to study climate and land-use change impacts on alpine streamflow in Switzerland.

This topic will gain importance in the future, e.g. to study transport phenomena of chemicals (Queloz et al., 2015), nutrient and pollutant cycling, CO₂ production or water temperature (Michel et al., 2020). In research, this might lead to increased use of complex, distributed models that can be coupled to ecosystem models, such as a TOPKAPI-ETH (Pappas et al., 2015) or STREAMFLOW (Gallice et al., 2016).

Or, perhaps more likely, we will see the development of new models specifically targeted at vegetation-hydrology interactions, such as the one developed by Fatichi et al. (2012a,b) called Tethys-Chloris (T&C) and developed to simulate vegetation-hydrology interactions at large scales. It has been applied to catchments in Switzerland to study soil moisture spatiotemporal dynamics (Fatichi et al., 2015a), as well as to assess the vulnerability of Alpine ecosystems to climate change (Mastrotheodoros et al., 2019).

Similarly, there are very few studies on agricultural water use, a topic that will gain importance in the future, but that might not further drive model diversification. For example, WaSiM-ETH has already been shown to be suitable to study the demand and supply of water for agriculture, including irrigation (Fuhrer and Jasper, 2012). Besides, internationally widely used models might see more applications in Switzerland. One such example is SWAT (e.g. Abbaspour et al. 2007), which - given its user-friendliness - is likely to see more alpine applications despite not being specifically targeted to alpine environments (Andrianaki et al., 2019), but in exchange offers the option to study land management effects (Zarrineh et al., 2018).

3.6 Sediment production and transport

A special topic that deserves some focus is sediment transport modelling. The modelling of sediment sources, as well as transport capacity, requires models that yield reliable spatial patterns of hydrological processes, i.e. complex distributed models such as TOPKAPI-ETH, which is being extended for this purpose (Konz et al., 2011; Battista et al., 2020). Sediment management, for example in the context of hydropower production (Raymond Pralong et al., 2015; Gabbud and Lane, 2015), is constantly gaining importance in Alpine countries and will most likely drive the development of new modules to simulate the interplay of hydrological and geomorphological processes at the catchment scale.

3.7 Analysis of model behaviour and uncertainty analysis

A large body of hydrologic modelling literature focuses on a better understanding of model behaviour and in particular of model performance with respect to reproducing observed streamflow, e.g. as a function of model parameterizations, of spatio-temporal model resolution (Brunner et al., 2019c), of precipitation input data (Sikorska and Seibert, 2016; Müller-Thomy and Sikorska-Senoner, 2019), or of parameter estimation techniques (Foglia et al., 2009). In the context of model diversity, this field of research has overall little impact because most modelling groups who work on such theoretical aspects, simply use their in-house models for proofs of concepts or to actually improve their them (e.g. Schaefli et al. 2007b; Hingray et al. 2010).

The HBV-light model is probably the most widely used with this respect; model performance studies range from the integration of glacier mass balance data (Finger et al., 2015; Schaefli and Huss, 2011), of snow data assimilation (Griessinger et al., 2016), accounting for streamflow observation uncertainty (Westerberg et al., 2020), the influence of spatial or

temporal resolution of hydro-meteorological input (Girons Lopez and Seibert, 2016; Sikorska and Seibert, 2018), to the integration of citizen science data (Etter et al., 2020).

Similarly, there are several studies on model calibration and performance with PREVAH; examples include the study on error correction in forecasting chains by Bogner et al. (2018b), investigation of parameter regionalisation with little observed streamflow data by Viviroli and Seibert (2015) or the assessment of spatial pattern reproduction of soil moisture and evapotranspiration (Zappa and Gurtz, 2003) and of snow (Zappa, 2008).

More complex models are rarely used in this context due to computational constraints. Examples include the work of Cullmann et al. (2011), which used WaSiM-ETH to compare the efficiency of different methods for parameter estimation, or the work of Rössler et al. (2019), which also used WaSiM-ETH to compare various climate postprocessing methods and quantify their impact on different hydrological signatures.

Overall, there are only very few parameter regionalisation studies; one example is the work of Melsen et al. (2016), who applied the internationally used VIC model to the Thur catchment to assess the impact of parameter transfer over different temporal and spatial resolutions.

3.8 Large scale modelling

To complete the picture, we address here the application of some international hydrological models implemented for Europe or large European river basins such as the Rhine, and thus covering at least a major part of the hydrological domain of Switzerland. However, we restrict ourselves to those models whose code is publicly available and/or whose results are published and/or directly available for Swiss basins.

Kauffeldt et al. (2016) presented a technical review of large-scale hydrological models implemented in operational forecasting schemes on a continental level with regard to their suitability for the European Flood Awareness System (EFAS). Amongst the models evaluated in the study, three have been deployed specifically for Europe: LISFLOOD, HYPE and mHM (see Appendix 1).

While LISFLOOD and HYPE are already running operationally (see Appendix 1) at the European scale, mHM has only recently been applied for the development and evaluation of a pan-European multimodel seasonal hydrological forecasting system (Wanders et al., 2019). Rottler et al. (2020) applied it for assessing the potential future changes in flood seasonality in the Rhine River with a 500m spatial resolution.

Several other models have been applied specifically for the Rhine basin, mainly focusing either on forecasting discharge or climate change impact applications. Examples include the so-called wflow_hbv model (van Osnabrugge et al., 2017, van Osnabrugge et al., 2019 and van Osnabrugge 2020) for hourly/daily streamflow forecasting of the Rhine, allowing lake level data assimilation. Another example is the LARSIM model, which was implemented at a 1km² resolution in combination with HBV-light to assess the origin of streamflow components in a project of the International Commission for the Hydrology of the Rhine basin (KHR/CHR) in 2012 (Stahl et al., 2017). The major regulated and unregulated lakes were included in LARSIM, and also four of the most influent “clustered” hydropower reservoirs present on the upper Aare, upper Reuss, upper Rhine and in the Ill river catchment (Fig. 1).

In general, the skill of most large scale models is found to be inferior near the main Alpine ridge compared to mountainous or lowland areas. The high Alpine catchments have been identified early as posing a major challenge to large scale hydrological modelling (Kleinn et al., 2005). Besides larger errors in the meteorological variables (precipitation in particular), and the important effect of water management practices, the smaller the catchment area and the greater the elevation ranges, the more detailed the model structure and the spatial resolution need to be to achieve good model performances (Gurtz et al., 2003). While most likely being cancelled out downstream (Kleinn et al., 2005), these problems remain yet to be addressed in large scale modelling and certainly partly explain why specific Swiss-scale

models continue to be extremely popular.

4 Disentangling the motivations behind the choices

In total, we reviewed 157 peer-reviewed journal articles on hydrological modelling in Swiss catchments (see Table 1 in the Supporting Information). Excluding the large scale applications (Section 3.8), a Swiss hydrological model (category D or E in Table 1) is selected in 93% of cases, leaving little room for international models. PREVAH takes the lion's share with about 30% of the applications, followed by HBV-light (16.5%) and WaSiM-ETH (14.6%). The most used international model is SWAT with a small 4% usage (7 cases), mainly related to research led from outside Switzerland. An analysis of the temporal evolution of model use (Fig. 2) suggests a small opening to international models. The relatively higher peak in 2003 is mainly due to articles related to the MAP project (Mesoscale Alpine Programme).

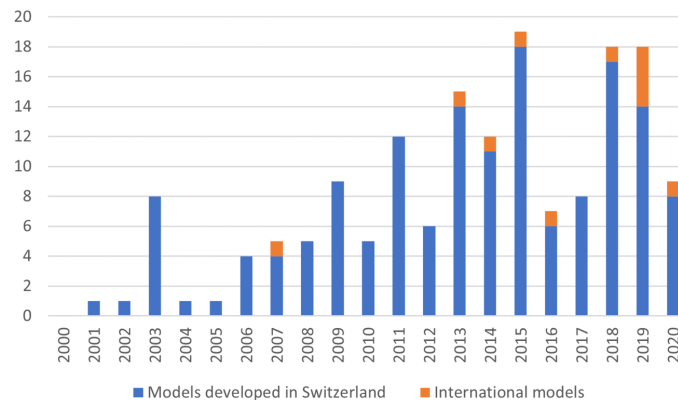


Figure 2 Number of articles reporting applications of hydrological models over the years with a distinction of the models developed in Switzerland and international models.

[Addor and Melsen \(2019\)](#) argue that the choice of a model is driven by legacy rather than adequacy, where they understand by legacy: “practicality, convenience, experience, and habit”. This hypothesis implies that the hydrological model of choice depends on the one hand essentially on the experience available in the modelling group and on the other hand on the code and data availability.

In the articles analyzed here, about 25% of the authors specifically address the model's adequacy with the context or the landscape. However, this does not mean that adequacy has been formally tested or that it actually drove the choice of the model, but rather that it is argued as suitable to the intended application. About 53% of the articles do not provide any mention of adequacy. The rest provide some description of the model characteristics that might be interpreted as arguments for suitability to the case study. Furthermore, besides the hydrological processes studies (Section 3.1), there are no examples where the perceptual model, i.e. the modellers' perception of how nature works, is explicitly discussed, a shortcoming that is the rule rather than the exception in hydrological modelling works ([Beven and Chappell, rev](#)).

Some models are specialized for certain processes, such as ALPINE3D for snow and GERM for glaciers, and are thus proportionally more used in these contexts (Fig. 3). TOPKAPI-ETH tends to be more used for processes that need a physically-based representation or that need a gridded spatial structure to provide gridded output, e.g. in view

of coupling to another model. RS specifically targets flood modelling and hydropower operations, as it was designed for operational flood mitigation with hydropower plants. The three most used models, i.e. PREVAH, HBV-light and WaSiM-ETH, are general models and are applied to different topics, such as climate change impact studies, floods, droughts, cryosphere-related processes, and operational forecasting (Fig. 3).

One point to note is that the adequacy to climate change studies is generally not discussed. References to previous studies are sometimes provided, without the latter having addressed this point explicitly. While it is relatively easy to demonstrate a model's ability to reproduce floods or drought conditions, its transferability to other climate conditions is more difficult to prove directly.

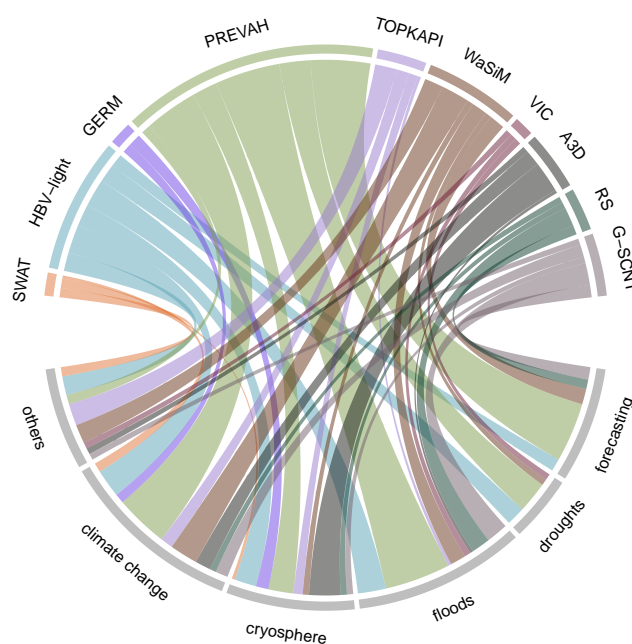


Figure 3 Hydrological models applied to different contexts in Switzerland. The importance of the link is proportional to the number of scientific articles. The importance of some models can be inflated by the fact that an article can address multiple contexts, such as floods and climate change. Models with too few use cases (less than three) are not included for the sake of clarity. A3D stands for ALPINE3D and G-SCNT for GSM-SOCONT.

One of the reasons driving the choice for one hydrological model, besides the adequacy, is reusing a model that is already set up for a catchment of interest, sometimes without the need to recalibrate it. About 20% of the articles explicitly state that the applied model comes from another study. Likely, this number should be higher as some authors publish multiple articles targeting different topics but on one model setup, without explicitly mentioning it.

Another reason is the selection of the model that is developed and used at the research institute. This is a strong driver, as for 66% of the articles the first author is affiliated with the institute where the model is being developed - which confirms a hypothesis that is indeed widespread in hydrology. The model at hand is thus well known, the code is available, and specialists are present to make necessary adaptations to it. Also, when the model is not one from the institute, collaborations are established with the developer or the lead researcher

of the model, leading to the fact that for 72% of the articles, the model developer (or team leader) is co-authoring the paper. These three aspects - reuse of an existing setup, in-house knowledge and collaborations - have one common ground, which is convenience. Finally, the choice of the model might also be imposed by a project.

While we see an impressive model diversity at the single or few catchments scale, it is noteworthy that our review points towards an important national-scale shortcoming: while there are catchments that have been “over-modelled” (e.g. Thur, Dischma) - however with little model intercomparison - there is a clear lack of large scale or national studies. In particular, the few available studies often do not cross the Swiss national border, even though the “hydrological Switzerland” extends to its neighbouring countries (Fig. 1).

The absence of such larger scale studies might be explained by shortcomings and challenges more widely encountered in hydrological modelling over larger domains. These include differing quality and scales of input data and streamflow observations and large heterogeneity in hydrological behaviour (possibly requiring more than one specialized model). Yet, this heterogeneity may in fact provide us with the opportunity to improve our understanding of differences in model adequacy and model performance, and to draw most needed conclusions on the robustness of generalizations and on estimation uncertainty (Gupta et al., 2014; McMillan et al., 2016).

5 Conclusion

Focusing on Switzerland, we carried out a comprehensive literature review on the hydrological models developed and applied in different contexts. The objective of this work was to disentangle the motivations and reasons behind the choices that led to the current co-existence of a wide range of streamflow models in a small country. To structure the analysis, we attempted a classification into eight fields of model application, ranging from hydrological process research to model uncertainty analysis and large scale modelling. For all reviewed studies, we examined the arguments that were explicitly put forward by the authors for model selection, as well as implicit aspects, such as the author’s affiliation or co-authorships.

The model adequacy for the study context or the landscape is explicitly addressed by only 25% of the articles, while 53% make no mention of adequacy, neither provide any justification for the choice of the model. The models that have specifically been developed to represent specific processes, such as snow- or glacier melt or hydropower operations, are obviously mainly used in these contexts. However, the more general models, which are also the most used ones, are applied indifferently to various contexts and landscapes.

Not surprisingly, researchers active in Switzerland are very keen on using a model developed in Switzerland (93% of the case studies) or even at their own research institute (66% of the articles analysed), and possibly used on the same catchment previously (20%), which all in all underlines that convenience might be the foremost model selection driver. Moreover, this is likely to be the cause of the existence of so many hydrological models, as each research group develops its own tools.

Convenience certainly also explains that some catchments are used in numerous studies and that larger scale or multi-catchment studies on hydrological functioning and model behaviour are largely missing: both points might in fact be explained by how tedious it remains to gather all relevant data (Switzerland does not yet have a hydrological data portal). The absence of model intercomparison, in exchange, might at least partly be explained by the few open-source models used in Switzerland.

With ongoing climate change and ensuing challenges for water resources and water-related hazard management, hydrological modelling needs to evolve quickly. In Alpine environments, the most striking example is certainly the emergence of hydrological droughts

(Loon, 2015) during summer and fall (Brunner et al., 2019b; Rigling and Stähli, 2020), which requires to understand the drivers of low flow (Arnoux et al., 2020) and the development of hydrological models that reliably represent groundwater recharge.

This component is, in fact, crudely parametrised in many streamflow models for alpine environments. Improved modelling of surface water-groundwater interactions is also a precondition for water temperature projections, agricultural water use and related water quality, drinking water management, and biodiversity assessment in ecosystems strongly influenced by river-groundwater interactions (Brunner et al., 2017).

Another key topic that will receive growing attention is the role of the vegetation in modulating climate extremes (Mastrotheodoros et al., 2020) and land-use changes induced by climate warming, calling thereby for improved representations of vegetation's role in hydrological models.

Accordingly, application-oriented as well as essentially research-oriented models can see further diversification in the near future. If model development continues the path taken so far, models will branch into sub-variants, and process-specific models will be created. However, we see two elements that might reverse the trend. The first element is the emergence of modular frameworks that allow creating a wide variety of model structures. While some specific topics might still need custom models tailored to certain applications, most hydrological models share similar principles and process representations. The creation of such flexible frameworks is strongly encouraged by Clark et al. (2011). Nowadays, different flexible frameworks exist, such as SUPERFLEX, FUSE (Clark et al., 2008), PERSiST (Futter et al., 2014), ECHSE (Kneis, 2015), MARRMoT (Knoben et al., 2019), Raven (Craig et al., 2020), and SUMMA (Clark et al., 2015). However, the flexibility provided by these frameworks likely comes with a counterpart, which is more code complexity. Most of these frameworks are relatively new and their adoption by a large community of modellers remains to be proven.

The second element is the growing adoption of version control systems that allow collaboration on open-source code with unprecedented ease. These code sharing platforms (code repositories) allow for anyone to suggest improvements (in a written form) to an open-source code or even to suggest changes to the code (e.g. pull requests) that will be reviewed by the developers of the model and merged to the main code base. As more models go open source, the need to create in-house versions to implement processes decreases. Hopefully, it should increase contributions to shared code bases and benefit a community-driven dynamic that would be beneficial for all, increasing thereby international collaborations.

Acknowledgements

We would like to thank various colleagues for their help on the history of hydrological modelling in Switzerland (see Supplementary Information) and Karsten Jasper for the insight on hydrological modelling at the Swiss Federal Office for the Environment (FOEN).

Appendix 1: Short model descriptions, alphabetical order

ALPINE3D (Lehning et al., 2006) is a model developed in Switzerland targeting surface processes in alpine environments, in particular snow processes, and is suitable for very steep terrain. It targets applications where the small-scale variability at the atmosphere-surface interface is important. Three-dimensional aspects relate to processes in the atmosphere, such as drifting snow. The snow-related processes are modelled by the physically-based SNOWPACK model (Lehning et al. 2002a; Bartelt and Lehning 2002a,b; Lehning et al. 2002b). *ALPINE3D* has a built-in runoff module adapted from an early version of PREVAH

(Lehning et al., 2006) and a runoff module that solves the Richards equations (Wever et al., 2017). It has been recently extended by a hydrological simulation tool for streamflow and water temperature prediction (Gallice et al., 2016).

CemaNeige-GR6J is the daily version of a lumped, bucket-type rainfall-runoff model with six free parameters (Pushpalatha et al., 2011), combined with the CemaNeige snow module (Valéry et al., 2014a,b), which is a routine for snow accumulation and melt based on a degree-day concept that introduces two additional free parameters. GR6J is an empirical model with a root zone storage and two routing routines: one for the slow (unit hydrograph) and one for the fast flow component (unit hydrograph, a non-linear and an exponential store). Both flow components interact with the groundwater through an exchange coefficient. It has seen one application in Switzerland for a climate change impact study (Keller et al., 2019).

DECIPHeR (Dynamic fluxEs and Connectlvity for Predictions of HydRology; Coxon et al., 2019) is an open-source flexible model framework suited for different spatial scales. The model builds on the code and key concepts of Dynamic TOPMODEL (Beven and Freer, 2001), an improvement of the original TOPMODEL (TOPography based hydrological model; Beven and Kirkby, 1979). It can be run as a lumped model (1 HRU), as semi-distributed (multiple HRUs) or as fully distributed (HRU for every single grid cell). Each HRU is treated as a separate functional unit in the model and thus allows for different process conceptualizations and parameterizations across the catchment.

GERM (Glacier Evolution Runoff Model; Huss et al. 2008; Farinotti et al. 2012) consists of five different modules, which largely rely on existing approaches, dealing with snow accumulation, ablation, glacier evolution, evapotranspiration and runoff routing. It is a fully distributed, deterministic, conceptual model designed mainly for simulations at a daily resolution and a high spatial resolution. Glacier geometry is updated annually according to a non-parametric approach proposed by Huss et al. (2010). The hydrological module is based on the concept of linear reservoirs and distinguishes five surface types: ice, snow, rock, vegetation and open water.

GSM-SOCONT (Glacier and SnowMelt – SOil CONTRibution model; Schaeffli et al., 2005) is a semi-lumped conceptual glacio-hydrological model composed of the reservoir-based SOCONT model (consisting in a linear reservoir for the slow soil contribution and a non-linear reservoir for direct runoff) and the GSM model for the glacierized area. The SOCONT model was inspired by the GR3 model (Edijatno and Michel, 1989), which is part of the GR model family as is CemaNeige-GR6J (see above). It was developed at the Ecole Polytechnique Fédérale de Lausanne (EPFL). The model has a parsimonious structure and was initially developed for climate change impact studies. Catchments are subdivided first into ice-covered and ice-free parts and then in elevation bands. A version of GSM-SOCONT has been implemented into RS (see below) and modified for operational flood forecasting (Hamdi et al., 2005) and for design flood estimation (Zeimet et al., 2018b).

HBV (Hydrologiska Byråns Vattenbalansavdelning model; Bergström, 1976, 1992, 1995; Lindström et al., 1997) is a rainfall-runoff model that focuses on runoff generation processes, including snowmelt, and is characterized, by its original developers (Bergström, 1992), as being very general and is thus applied in many different geographical and climatological conditions.

HBV-light (Seibert and Vis, 2012) is an implementation of the HBV model (see above) that is further developed at the University of Zurich. HBV-light corresponds to a simplified and userfriendly version of the original model.

HYPE (HYdrological Predictions for the Environment, Lindström et al., 2010) is a large-scale semi-distributed conceptual model, designed to simulate discharge and model flow paths of nutrients in the water, and was originally developed by the Swedish Meteorological and Hydrological Institute. In the model, the landscape is divided into classes according to the soil type, land use and altitude, and the parameters are either global or coupled to the soil type or land-use. The model can simulate natural hydrological processes of snow- and glacier

melt, evapotranspiration, soil moisture, groundwater and routing through rivers and lakes, but also human-induced influences, such as regulated lakes and reservoirs, water abstractions and irrigation. HYPE is run operationally by SMHI for several purposes (e.g. flood forecasting or climate change impact assessments). The version covering the pan-European continent is referred to as E-HYPE, its application is entirely based on open and readily available data sources (Donnelly et al., 2015), including historical data (1981-2010), 1-10 day forecast, seasonal forecasts, climate change impact scenarios and actual model performance (<https://hypeweb.smhi.se/explore-water/geographical-domains/#europehype>).

LARSIM (Large Area Runoff Simulation Model; Ludwig and Bremicker, 2006) is a semi-distributed hydrological model, which describes continuous runoff processes in catchments and river networks. The model structure (subunit) can be grid-based or based on hydrologic subcatchments. While runoff generation (described with parallel linear storage reservoirs), routing (depending on channel geometries and roughness conditions) and flow retention are simulated at the subunit scale, snow storage, evapotranspiration, interception and soil storage are simulated at a subscale level according to land use classes. While it doesn't include a glacier melt component, LARSIM includes many features that were specifically designed for its operational use as a flood forecasting model, as well as offline applications (Stahl et al., 2017).

LISFLOOD is a GIS-based model for catchment-scale water balance simulation (Knijff et al., 2010). It has been specifically designed for large river catchments, and in particular, it makes use of data layers that are available for the Joint Research Center (JRC) at European scale, such as land use, soil type and texture, river network (Thielen et al., 2009). LISFLOOD is used by the European Flood Awareness System, EFAS, for medium- and seasonal-range forecasts with a 6-hourly and daily time step. Both historical river discharge time series (1991 to near real-time) and reforecasts (1999-2018) are available on the Climate Data Store of Copernicus (<https://cds.climate.copernicus.eu/>).

mHM (mesoscale Hydrological model; Samaniego et al. 2010; Kumar et al. 2013; Thober et al. 2019) is a distributed hydrological model, which has the particularity of using the multiscale parameter regionalization approach (MPR, Samaniego et al., 2010) for parameter identification. It has been specifically developed to not need recalibration when applied at different resolutions (Kauffeldt et al., 2016). It is driven by hourly or daily meteorological forcings and utilizes observable basin physical characteristics to infer the spatial variability of the required parameters. It is developed by the Umweltforschungszentrum Leipzig and has been successfully applied to catchments ranging from 4 km² and to beyond 500,000 km². To the best of our knowledge, it does not yet have a glacier melt component. The open-source code (Fortran) is available at <https://git.ufz.de>.

PREVAH (Precipitation-Runoff-Evapotranspiration HRU Model; Gurtz et al. 1999; Vivoli et al. 2009b) is a Swiss conceptual model that has been developed specifically for heterogeneous mountainous environments with highly spatially and temporally variable processes. It follows the HBV model structure, with numerous modifications, and was designed for studies in Alpine headwater basins (Orth et al., 2015). PREVAH branched out into different versions, two of which are mostly used: an HRU-based version that runs at an hourly time step and a fully distributed version (Zappa et al., 2012) that runs at a daily time step. The distributed version of PREVAH being the most used, any reference to PREVAH in this paper implies the distributed version if not stated otherwise.

RS (Routing System; Dubois and Boillat, 2000; García Hernández et al., 2007) has been developed at the Swiss Federal Institute of Technology in Lausanne (EPFL). The version that is freely available, and thus more used, is RS MINERVE, which was developed for operational flood forecasting in Valais (García Hernández et al., 2009b) and which is maintained by the CREALP (Centre de recherche sur l'environnement alpin). RS specifically targets hydropower systems by modelling the influence of regulated infrastructures and thus allows modelling complex hydrological and hydraulic networks with anthropogenic influences.

SEHR-ECHO (Spatially Explicit Hydrologic Response model for ecohydrologic applications; [Schaeffli et al., 2014](#)) is an evolution of GSM-SOCONT that was developed at the Swiss Federal Institute of Technology in Lausanne (EPFL). The model aims at taking into account the spatial variability in the runoff generation. The catchment is divided into sub-catchments connected to the river network in order to account for the origin of the different areal contributions and to route them in the river network.

StreamFlow is an extension of ALPINE3D (see above). It uses an explicit formulation of travel times ([Comola et al., 2015a](#)), as does SEHR-ECHO (see above).

SUPERFLEX ([Fenicia et al., 2011](#); [Kavetski and Fenicia, 2011b](#)) is a flexible hydrological framework now developed at Eawag (the Swiss Federal Institute of Aquatic Science and Technology). It allows building hydrological models using generic components for hypothesis testing. The building blocks are reservoirs, lag functions, and connections. The models elaborated with SUPERFLEX can be lumped, semi-distributed ([Fenicia et al., 2016](#)) or fully distributed ([Hostache et al., 2020](#)). An open-source version written in Python is available ([Molin et al., 2020](#)).

SWAT (Soil Water and Assessment Tool; [Arnold et al., 1998](#)) is an open-source semi-distributed, process-based hydrological model. Besides hydrology, other SWAT components can simulate energy balance, soil temperature, mass transport and land management at the sub-basin and HRU levels. It is one of the most applied models worldwide probably because of the broad range of hydrologic and environmental problems that can be addressed with it.

TOPKAPI-ETH ([Finger et al., 2011](#); [Ragettli and Pellicciotti, 2012](#)), developed at ETH Zurich, is a branch of the TOPKAPI model (TOPographic Kinematic APproximation and Integration; [Todini, 1995](#); [Todini and Ciarapica, 2002](#); [Liu and Todini, 2002](#); [Ciarapica and Todini, 2002](#)). It is a fully distributed and physically-based model based on the spatial integration of the kinematic wave model over the pixels of the digital elevation model (DEM). TOPKAPI-ETH has been modified for application to mountain basins by adding a second soil layer and modules for snow, glaciers, reservoirs, water abstraction, and diversion, and a new evapotranspiration scheme ([Finger et al., 2011, 2012](#); [Fatichi et al., 2015c](#)).

VIC (Variable Infiltration Capacity model; [Liang et al., 1994](#)) is an open-source grid-based land surface hydrological model. It is implemented so that grid cells with a resolution up to 1km are simulated independently of each other. Sub-grid heterogeneity introduced by different land-use types and elevation is handled via statistical distributions. Routing must be performed separately with an additional routine taking care of the water transport between cells.

WaSiM-ETH (Water Flow and Balance Simulation Model-ETH; [Schulla and Jasper, 2007](#); [Schulla, 2009](#)) is a fully distributed hydrological model originally developed at ETH Zurich. It describes the water fluxes in the unsaturated soil using the 1D-Richards equation ([Richards, 1931](#)). The transfer function (runoff concentration) can be processed through a series of linear reservoirs or with the kinematic wave approach (from one cell to another). WaSiM-ETH covers a wide range of hydrological processes relevant for alpine environments, with different implemented variants.

wflow is the modular and distributed hydrological modelling platform of DELTARES (<https://www.deltares.nl/en/software/wflow-hydrology/>). *wflow_hbv* is a fully distributed version of the conceptual HBV model ([Lindström et al., 1997](#)) - applied on a grid basis - in the *wflow* framework with a kinematic wave as routing instead of the original triangular routing function; the model has an interception reservoir, snow module, root zone storage, fast runoff reservoir, and a groundwater reservoir ([de Boer-Euser et al., 2017](#)).

References

Abbaspour, K. C., Yang, J., Maximov, I., Siber, R., Bogner, K., Mieleitner, J., Zobrist, J., and Srinivasan, R. (2007). Modelling hydrology and water quality in the pre-alpine/alpine

- Thur watershed using SWAT. *Journal of Hydrology*, 333(2-4):413–430.
- Abednego, B., Caloz, R., and Collet, C. (1990). L'utilisation des SIG dans la modélisation en hydrologie de surface. *Geogr. Helv.*, 45(4):161–167.
- Addor, N., Jaun, S., Fundel, F., and Zappa, M. (2011). An operational hydrological ensemble prediction system for the city of Zurich (Switzerland): skill case studies and scenarios. *Hydrology and Earth System Sciences*, 15(7):2327–2347.
- Addor, N. and Melsen, L. A. (2019). Legacy Rather Than Adequacy, Drives the Selection of Hydrological Models. *Water Resources Research*, 55(1):378–390.
- Addor, N., Rössler, O., Köplin, N., Huss, M., Weingartner, R., and Seibert, J. (2014). Robust changes and sources of uncertainty in the projected hydrological regimes of Swiss catchments. *Water Resources Research*, 50(10):7541–7562.
- Ahrens, B., Jasper, K., and Gurtz, J. (2003). On ALADIN precipitation modeling and validation in an Alpine watershed. *Annales Geophysicae*, 21(3):627–637.
- Alaoui, A., Willmann, E., Jasper, K., Felder, G., Herger, F., Magnusson, J., and Weingartner, R. (2014). Modelling the effects of land use and climate changes on hydrology in the Ursern Valley, Switzerland. *Hydrological Processes*, 28(10):3602–3614.
- Ancey, C., Bardou, E., Funk, M., Huss, M., Werder, M. A., and Trehwela, T. (2019). Hydraulic Reconstruction of the 1818 Giétro Glacial Lake Outburst Flood. *Water Resources Research*, 55(11):8840–8863.
- Andres, N., Lieberherr, G., Sideris, I. V., Jordan, F., and Zappa, M. (2016). From calibration to real-time operations: an assessment of three precipitation benchmarks for a Swiss river system. *Meteorological Applications*, 23(3):448–461.
- Andrianaki, M., Shrestha, J., Kobierska, F., Nikolaidis, N. P., and Bernasconi, S. M. (2019). Assessment of SWAT spatial and temporal transferability for a high-altitude glacierized catchment. *Hydrology and Earth System Sciences*, 23(8):3219–3232.
- Anghileri, D., Botter, M., Castelletti, A., Weigt, H., and Burlando, P. (2018). A Comparative Assessment of the Impact of Climate Change and Energy Policies on Alpine Hydropower. *Water Resources Research*, 54(11):9144–9161.
- Anghileri, D., Monhart, S., Zhou, C., Bogner, K., Castelletti, A., Burlando, P., and Zappa, M. (2019). The Value of Subseasonal Hydrometeorological Forecasts to Hydropower Operations: How Much Does Preprocessing Matter? *Water Resources Research*, 55(12):10159–10178.
- Antonetti, M., Horat, C., Sideris, I. V., and Zappa, M. (2019). Ensemble flood forecasting considering dominant runoff processes - Part 1: Set-up and application to nested basins (Emme, Switzerland). *Natural Hazards and Earth System Sciences*, 19(1):19–40.
- Arnold, J. G., Srinivasan, R., Muttiah, R. S., and Williams, J. R. (1998). LARGE AREA HYDROLOGIC MODELING AND ASSESSMENT PART I: MODEL DEVELOPMENT. *Journal of the American Water Resources Association*, 34(1):73–89.
- Arnoux, M., Brunner, P., Schaefli, B., Mott, R., Cochand, F., and Hunkeler, D. (2020). Low-flow behavior of alpine catchments with varying quaternary cover under current and future climatic conditions. *Journal of Hydrology*, page 125591.
- Asadi, P., Engelke, S., and Davison, A. C. (2018). Optimal regionalization of extreme value distributions for flood estimation. *Journal of Hydrology*, 556:182–193.

- Bartelt, P. and Lehning, M. (2002a). A physical SNOWPACK model for the Swiss avalanche warning. *Cold Regions Science and Technology*, 35(3):123–145.
- Bartelt, P. and Lehning, M. (2002b). A physical SNOWPACK model for the Swiss avalanche warning Part I: Numerical model. *Cold Regions Science and Technology*, 35(3):123–145.
- Battista, G., Molnar, P., and Burlando, P. (2020). Modelling impacts of spatially variable erosion drivers on suspended sediment dynamics. *Earth Surface Dynamics*, 8(3):619–635.
- Baumgartner, M. F., Martinec, J., and Seidel, K. (1986). LARGE-AREA DETERMINISTIC SIMULATION OF NATURAL RUNOFF FROM SNOWMELT BASED ON LANDSAT MSS DATA By:BAUMGARTNER, MF (BAUMGARTNER, MF); MARTINEC, J (MARTINEC, J); SEIDEL, K (SEIDEL, K) IEEE TRANSACTIONS ON GEOSCIENCE AND REMOTE SENSING. *IEEE TRANSACTIONS ON GEOSCIENCE AND REMOTE SENSING*, 24:1013–1017.
- Bavay, M., Grünewald, T., and Lehning, M. (2013). Response of snow cover and runoff to climate change in high Alpine catchments of Eastern Switzerland. *Advances in Water Resources*, 55(2013):4–16.
- Bavay, M., Lehning, M., Jonas, T., and Löwe, H. (2009). Simulations of future snow cover and discharge in Alpine headwater catchments. *Hydrological Processes*, 23(1):95–108.
- Bergström, S. (1976). Development and application of a conceptual runoff model for Scandinavian catchments. Technical report, SMHI Report RHO 7, Norrköping.
- Bergström, S. (1992). The HBV model - its structure and applications. Technical Report 4.
- Bergström, S. (1995). The HBV model. In Singh, V. P., editor, *Computer Models of Watershed Hydrology*, chapter 13.
- Beven, K. (2020a). The era of Infiltration.
- Beven, K. and Chappell, N. (In rev.). Perceptual perplexity and parameter parsimony in hydrology. *WIREs Water*.
- Beven, K. and Freer, J. (2001). A dynamic TOPMODEL. *Hydrological Processes*, 15(10):1993–2011.
- Beven, K. and Young, P. (2013). A guide to good practice in modeling semantics for authors and referees. *Water Resources Research*, 49(8):5092–5098.
- Beven, K. J. (2000). Uniqueness of place and process representations in hydrological modelling. *Hydrology and Earth System Sciences*, 4(2):203–213.
- Beven, K. J. (2020b). A history of the concept of time of concentration. *Hydrology and Earth System Sciences*, 24(5):2655–2670.
- Beven, K. J. and Kirkby, M. J. (1979). A physically based variable contributing area model of basin hydrology / Un modèle à base physique de zone d'appel variable de l'hydrologie du bassin versant. *Hydrological Sciences Bulletin*, 24(1):43–69.
- Bieri, M. and Schleiss, A. J. (2013). Analysis of flood-reduction capacity of hydropower schemes in an Alpine catchment area by semidistributed conceptual modelling. *Journal of Flood Risk Management*, 6(3):169–185.
- Bogner, K., Liechti, K., Bernhard, L., Monhart, S., and Zappa, M. (2018a). Skill of Hydrological Extended Range Forecasts for Water Resources Management in Switzerland. *Water Resources Management*, 32(3):969–984.

- Bogner, K., Liechti, K., and Zappa, M. (2018b). Error Correcting and Combining Multi-model Flood Forecasting Systems. In *Advances in Hydroinformatics*, pages 569–578. Springer Singapore.
- Bosshard, T., Carambia, M., Goergen, K., Kotlarski, S., Krahe, P., Zappa, M., and Schär, C. (2013). Quantifying uncertainty sources in an ensemble of hydrological climate-impact projections. *Water Resources Research*, 49(3):1523–1536.
- Boughton, W. (2004). The Australian water balance model. *Environmental Modelling & Software*, 19(10):943–956.
- Brauchli, T., Trujillo, E., Huwald, H., and Lehning, M. (2017). Influence of Slope-Scale Snowmelt on Catchment Response Simulated With the Alpine3D Model. *Water Resources Research*, 53(12):10723–10739.
- Braun, L. and Lang, H. (1986). Simulation of snowmelt runoff in lowland and lower Alpine regions of Switzerland. In *Modelling Snowmelt-Induced Processes (Proceedings of the Budapest Symposium, July 1986)*. IAHS Publ. no. 155. IAHS.
- Brunner, M. I., Furrer, R., Sikorska, A. E., Viviroli, D., Seibert, J., and Favre, A. C. (2018a). Synthetic design hydrographs for ungauged catchments: a comparison of regionalization methods. *Stochastic Environmental Research and Risk Assessment*, 32(7):1993–2023.
- Brunner, M. I., Liechti, K., and Zappa, M. (2019a). Extremeness of recent drought events in Switzerland: dependence on variable and return period choice. *Natural Hazards and Earth System Sciences*, 19:2311–2323.
- Brunner, M. I., Liechti, K., and Zappa, M. (2019b). Extremeness of recent drought events in Switzerland: dependence on variable and return period choice. *Nat. Hazards Earth Syst. Sci.*, 19(10):2311–2323.
- Brunner, M. I., Sikorska, A. E., and Seibert, J. (2018b). Bivariate analysis of floods in climate impact assessments. *Science of The Total Environment*, 616-617:1392–1403.
- Brunner, M. I. and Sikorska-Senoner, A. E. (2019). Dependence of flood peaks and volumes in modeled discharge time series: Effect of different uncertainty sources. *Journal of Hydrology*, 572:620–629.
- Brunner, M. I., Zappa, M., and Stähli, M. (2019c). Scale matters: Effects of temporal and spatial data resolution on water scarcity assessments. *Advances in Water Resources*, 123:134–144.
- Brunner, P., Therrien, R., Renard, P., Simmons, C. T., and Franssen, H.-J. H. (2017). Advances in understanding river-groundwater interactions. *Reviews of Geophysics*, 55(3):818–854.
- Bultot, F., Gellens, D., Spreafico, M., and Schadler, B. (1992). REPERCUSSIONS OF A CO₂ DOUBLING ON THE WATER-BALANCE - A CASE-STUDY IN SWITZERLAND. *Journal of Hydrology*, 137(1-4):199–208.
- Calanca, P., Roesch, A., Jasper, K., and Wild, M. (2006). Global warming and the summer-time evapotranspiration regime of the Alpine region. *Climatic Change*, 79(1-2):65–78.
- Carrier, C., Wirth, S. B., Cochand, F., Hunkeler, D., and Brunner, P. (2019). Exploring Geological and Topographical Controls on Low Flows with Hydrogeological Models. *Groundwater*, 57(1):48–62.

- Ciarapica, L. and Todini, E. (2002). TOPKAPI: a model for the representation of the rainfall-runoff process at different scales. *Hydrological Processes*, 16(2):207–229.
- Clark, M. P., Kavetski, D., and Fenicia, F. (2011). Pursuing the method of multiple working hypotheses for hydrological modeling. *Water Resources Research*, 47(9):1–16.
- Clark, M. P., Nijssen, B., Lundquist, J. D., Kavetski, D., Rupp, D. E., Woods, R. a., Freer, J. E., Gutmann, E. D., Wood, A. W., Gochis, D. J., Rasmussen, R. M., Tarboton, D. G., Mahat, V., Flerchinger, G. N., and Marks, D. G. (2015). The structure for unifying multiple modeling alternatives (SUMMA), Technical Description, NCAR Technical Notes NCAR / TN 514+STR. Technical report, National Center for Atmospheric Research, Boulder, Colorado.
- Clark, M. P., Schaefli, B., Schymanski, S. J., Samaniego, L., Luce, C. H., Jackson, B. M., Freer, J. E., Arnold, J. R., Dan Moore, R., Istanbuluoglu, E., and Ceola, S. (2016). Improving the theoretical underpinnings of process-based hydrologic models. *Water Resources Research*, 52:2350–2365.
- Clark, M. P., Slater, A. G., Rupp, D. E., Woods, R. a., Vrugt, J. a., Gupta, H. V., Wagener, T., and Hay, L. E. (2008). Framework for Understanding Structural Errors (FUSE): A modular framework to diagnose differences between hydrological models. *Water Resources Research*, 44(12).
- Comola, F., Schaefli, B., Rinaldo, A., and Lehning, M. (2015a). Thermodynamics in the hydrologic response: Travel time formulation and application to Alpine catchments. *Water Resources Research*, 51(3):1671–1687.
- Comola, F., Schaefli, B., Ronco, P. D., Botter, G., Bavay, M., Rinaldo, A., and Lehning, M. (2015b). Scale-dependent effects of solar radiation patterns on the snow-dominated hydrologic response. *Geophysical Research Letters*, 42(10):3895–3902.
- Coxon, G., Freer, J., Lane, R., Dunne, T., Knoben, W. J. M., Howden, N. J. K., Quinn, N., Wagener, T., and Woods, R. (2019). DECIPHeR v1: Dynamic fluxEs and Connectivity for Predictions of HydRology. *Geoscientific Model Development*, 12(6):2285–2306.
- Craig, J. R., Brown, G., Chlumsky, R., Jenkinson, R. W., Jost, G., Lee, K., Mai, J., Serrer, M., Sgro, N., Shafii, M., Snowdon, A. P., and Tolson, B. A. (2020). Flexible watershed simulation with the Raven hydrological modelling framework. *Environmental Modelling and Software*, 129(April).
- Cullmann, J., Krausse, T., and Saile, P. (2011). Parameterising hydrological models - Comparing optimisation and robust parameter estimation. *Journal of Hydrology*, 404(3-4):323–331.
- Dal Molin, M., Schirmer, M., Zappa, M., and Fenicia, F. (2020). Understanding dominant controls on streamflow spatial variability to set up a semi-distributed hydrological model: The case study of the Thur catchment. *Hydrology and Earth System Sciences*, 24(3):1319–1345.
- de Boer-Euser, T., Bouaziz, L., Niel, J. D., Brauer, C., Dewals, B., Drogue, G., Fenicia, F., Grelier, B., Nossent, J., Pereira, F., Savenije, H., Thirel, G., and Willems, P. (2017). Looking beyond general metrics for model comparison – lessons from an international model intercomparison study. *Hydrology and Earth System Sciences*, 21(1):423–440.
- Donnelly, C., Andersson, J. C., and Arheimer, B. (2015). Using flow signatures and catchment similarities to evaluate the E-HYPE multi-basin model across Europe. *Hydrological Sciences Journal*, 61(2):255–273.

- Dubois, J. and Boillat, J.-L. (2000). Routing System. Modélisation du routage de crues dans des systèmes hydrauliques à surface libre. Technical report.
- Edijatno and Michel, C. (1989). Un modèle pluie-débit journalier à trois paramètres. *La Houille Blanche*, (2):113–122.
- Etter, S., Addor, N., Huss, M., and Finger, D. (2017). Climate change impacts on future snow, ice and rain runoff in a Swiss mountain catchment using multi-dataset calibration. *Journal of Hydrology: Regional Studies*, 13(August):222–239.
- Etter, S., Strobl, B., Seibert, J., and van Meerveld, H. J. (2020). Value of Crowd-Based Water Level Class Observations for Hydrological Model Calibration. *Water Resources Research*, 56(2):1–17.
- Farinotti, D., Usselman, S., Huss, M., Bauder, A., and Funk, M. (2012). Runoff evolution in the Swiss Alps: Projections for selected high-alpine catchments based on ENSEMBLES scenarios. *Hydrological Processes*, 26(13):1909–1924.
- Fatichi, S., Ivanov, V. Y., and Caporali, E. (2012a). A mechanistic ecohydrological model to investigate complex interactions in cold and warm water-controlled environments: 1. Theoretical framework and plot-scale analysis. *Journal of Advances in Modeling Earth Systems*, 4(5):1–31.
- Fatichi, S., Ivanov, V. Y., and Caporali, E. (2012b). A mechanistic ecohydrological model to investigate complex interactions in cold and warm water-controlled environments: 2. Spatiotemporal analyses. *Journal of Advances in Modeling Earth Systems*, 4(5):1–22.
- Fatichi, S., Katul, G. G., Ivanov, V. Y., Pappas, C., Paschalis, A., Consolo, A., Kim, J., and Burlando, P. (2015a). Abiotic and biotic controls of soil moisture spatiotemporal variability and the occurrence of hysteresis. *Water Resources Research*, 51(5):3505–3524.
- Fatichi, S., Rimkus, S., Burlando, P., and Bordoy, R. (2014). Does internal climate variability overwhelm climate change signals in streamflow? The upper Po and Rhone basin case studies. *Science of the Total Environment*, 493:1171–1182.
- Fatichi, S., Rimkus, S., Burlando, P., Bordoy, R., and Molnar, P. (2015b). High-resolution distributed analysis of climate and anthropogenic changes on the hydrology of an Alpine catchment. *Journal of Hydrology*, 525:362–382.
- Fatichi, S., Rimkus, S., Burlando, P., Bordoy, R., and Molnar, P. (2015c). High-resolution distributed analysis of climate and anthropogenic changes on the hydrology of an Alpine catchment. *Journal of Hydrology*, 525:362–382.
- Felder, G. and Weingartner, R. (2017). Assessment of deterministic PMF modelling approaches. *Hydrological Sciences Journal*, 62(10):1591–1602.
- Fenicia, F., Kavetski, D., and Savenije, H. H. (2011). Elements of a flexible approach for conceptual hydrological modeling: 1. Motivation and theoretical development. *Water Resources Research*, 47(11):1–13.
- Fenicia, F., Kavetski, D., Savenije, H. H. G., and Pfister, L. (2016). From spatially variable streamflow to distributed hydrological models: Analysis of key modeling decisions. *Water Resources Research*, 52(2):954–989.
- Finger, D., Heinrich, G., Gobiet, A., and Bauder, A. (2012). Projections of future water resources and their uncertainty in a glacierized catchment in the Swiss Alps and the subsequent effects on hydropower production during the 21st century. *Water Resources Research*, 48(2).

- Finger, D., Hugentobler, A., Huss, M., Voinesco, A., Wernli, H., Fischer, D., Weber, E., Jeannin, P. Y., Kauzlaric, M., Wirz, A., Vennemann, T., Hüsler, F., Schädler, B., and Weingartner, R. (2013). Identification of glacial meltwater runoff in a karstic environment and its implication for present and future water availability. *Hydrology and Earth System Sciences*, 17(8):3261–3277.
- Finger, D., Pellicciotti, F., Konz, M., Rimkus, S., and Burlando, P. (2011). The value of glacier mass balance satellite snow cover images, and hourly discharge for improving the performance of a physically based distributed hydrological model. *Water Resources Research*, 47(7).
- Finger, D., Vis, M., Huss, M., and Seibert, J. (2015). The value of multiple data set calibration versus model complexity for improving the performance of hydrological models in mountain catchments. *Water Resources Research*, 51(4):1939–1958.
- FOEN (2021). *Auswirkungen des Klimawandels auf die Schweizer Gewässer. Hydrologie, Gewässerökologie und Wasserwirtschaft. Bundesamt für Umwelt BAFU, Bern. Umwelt-Wissen Nr. 2016:*
- Foglia, L., Hill, M. C., Mehl, S. W., and Burlando, P. (2009). Sensitivity analysis calibration, and testing of a distributed hydrological model using error-based weighting and one objective function. *Water Resources Research*, 45(6).
- Forster, F. (1989). Einfluss der Bewaldung auf die Komponenten der Wasserbilanz. *Informationsbericht 4/89 des Bayerischen Landes-amtes für Wasserwirtschaft, München*, pages 47 – 63.
- Führer, J. and Jasper, K. (2012). Demand and Supply of Water for Agriculture: Influence of Topography and Climate in Pre-Alpine, Mesoscale Catchments. *Natural Resources*, 03(03):145–155.
- Fundel, F., Jörg-Hess, S., and Zappa, M. (2013). Monthly hydrometeorological ensemble prediction of streamflow droughts and corresponding drought indices. *Hydrology and Earth System Sciences*, 17(1):395–407.
- Fundel, F. and Zappa, M. (2011). Hydrological ensemble forecasting in mesoscale catchments: Sensitivity to initial conditions and value of reforecasts. *Water Resources Research*, 47(9):1–15.
- Futter, M. N., Erlandsson, M. A., Butterfield, D., Whitehead, P. G., Oni, S. K., and Wade, A. J. (2014). PERSiST: A flexible rainfall-runoff modelling toolkit for use with the INCA family of models. *Hydrology and Earth System Sciences*, 18(2):855–873.
- Gabbud, C. and Lane, S. N. (2015). Ecosystem impacts of Alpine water intakes for hydropower: the challenge of sediment management. *Wiley Interdisciplinary Reviews: Water*, pages n/a–n/a.
- Gallice, A., Bavay, M., Brauchli, T., Comola, F., Lehning, M., and Huwald, H. (2016). StreamFlow 1.0: an extension to the spatially distributed snow model Alpine3D for hydrological modelling and deterministic stream temperature prediction. *Geoscientific Model Development*, 9(12):4491–4519.
- García Hernández, J., Boillat, J.-L., Jordan, F., and Hingray, B. (2009a). La prévision hydrométéorologique sur le bassin versant du Rhône en amont du Léman. *La Houille Blanche*, (5):61–70.

- García Hernández, J., Horton, P., Tobin, C., and Boillat, J. (2009b). MINERVE 2010: Prédiction hydrométéorologique et gestion des crues sur le Rhône alpin. *Wasser Energie Luft – Eau Energie Air*, 4:297–302.
- García Hernández, J., Jordan, F., Dubois, J., and Boillat, J. L. (2007). *Routing System II, Modélisation d'écoulements dans des systèmes hydrauliques*. Number 32.
- Girons Lopez, M. and Seibert, J. (2016). Influence of hydro-meteorological data spatial aggregation on streamflow modelling. *Journal of Hydrology*, 541:1212–1220.
- Griessinger, N., Seibert, J., Magnusson, J., and Jonas, T. (2016). Assessing the benefit of snow data assimilation for runoff modeling in Alpine catchments. *Hydrology and Earth System Sciences*, 20(9):3895–3905.
- Gupta, H. V., Perrin, C., Blöschl, G., Montanari, A., Kumar, R., Clark, M., and Andréassian, V. (2014). Large-sample hydrology: a need to balance depth with breadth. *Hydrology and Earth System Sciences*, 18(2):463–477.
- Gurtz, J., Baltensweiler, A., and Lang, H. (1999). Spatially distributed hydrotope-based modelling of evapotranspiration and runoff in mountainous basins. *Hydrological Processes*, 13(17):2751–2768.
- Gurtz, J., Zappa, M., Jasper, K., Lang, H., Verbunt, M., Badoux, A., and Vitvar, T. (2003). A comparative study in modelling runoff and its components in two mountainous catchments. *Hydrological Processes*, 17(2):297–311.
- Hager, W. H. (1984). A simplified hydrological rainfall-runoff model. *Journal of Hydrology*, 74(1):151–170.
- Hakala, K., Addor, N., Gobbe, T., Ruffieux, J., and Seibert, J. (2020). Risks and opportunities for a Swiss hydroelectricity company in a changing climate. *Hydrology and Earth System Sciences*, 24(7):3815–3833.
- Hamdi, Y., Hingray, B., and Musy, A. (2005). Un modèle de prédiction hydro-météorologique pour les crues du Rhône supérieur en Suisse. *Wasser Energie Luft*, 97.
- Hindshaw, R. S., Tipper, E. T., Reynolds, B. C., Lemarchand, E., Wiederhold, J. G., Magnusson, J., Bernasconi, S. M., Kretzschmar, R., and Bourdon, B. (2011). Hydrological control of stream water chemistry in a glacial catchment (Damma Glacier, Switzerland). *Chemical Geology*, 285(1-4):215–230.
- Hingray, B., Schaeffli, B., Mezghani, A., and Hamdi, Y. (2010). Signature-based model calibration for hydrological prediction in mesoscale Alpine catchments. *Hydrological Sciences Journal*, 55(6):1002–1016.
- Horton, P., Schaeffli, B., Mezghani, A., Hingray, B., and Musy, A. (2006). Assessment of climate-change impacts on alpine discharge regimes with climate model uncertainty. *Hydrological Processes*, 20(10):2091–2109.
- Hostache, R., Rains, D., Mallick, K., Chini, M., Pelich, R., Lievens, H., Fenicia, F., Corato, G., Verhoest, N. E., and Matgen, P. (2020). Assimilation of Soil Moisture and Ocean Salinity (SMOS) brightness temperature into a large-scale distributed conceptual hydrological model to improve soil moisture predictions: The Murray–Darling basin in Australia as a test case. *Hydrology and Earth System Sciences*, 24(10):4793–4812.
- Huss, M., Farinotti, D., Bauder, A., and Funk, M. (2008). Modelling runoff from highly glacierized alpine drainage basins in a changing climate. *Hydrological Processes*, 22:3888–3902.

- Huss, M., Jouvét, G., Farinotti, D., and Bauder, A. (2010). Future high-mountain hydrology: A new parameterization of glacier retreat. *Hydrology and Earth System Sciences*, 14(5):815–829.
- Iorgulescu, I. and Jordan, J. P. (1994). Validation of TOPMODEL on a small Swiss catchment. *Journal of Hydrology*, 159(1–4):255–273.
- Jasper, K., Calanca, P., and Fuhrer, J. (2006). Changes in summertime soil water patterns in complex terrain due to climatic change. *Journal of Hydrology*, 327(3–4):550–563.
- Jasper, K., Calanca, P., Gyalistras, D., and Fuhrer, J. (2004). Differential impacts of climate change on the hydrology of two alpine river basins. *Climate Research*, 26:113–129.
- Jasper, K., Gurtz, J., and Lang, H. (2002). Advanced flood forecasting in Alpine watersheds by coupling meteorological observations and forecasts with a distributed hydrological model. *Journal of Hydrology*, 267(1–2):40–52.
- Jasper, K. and Kaufmann, P. (2003). Coupled runoff simulations as validation tools for atmospheric models at the regional scale. *Quarterly Journal of the Royal Meteorological Society*, 129(588 PART B):673–692.
- Jaun, S., Ahrens, B., Walser, A., Ewen, T., and Schär, C. (2008). A probabilistic view on the August 2005 floods in the upper Rhine catchment. *Natural Hazards and Earth System Sciences*, 8(2):281–291.
- Jenicek, M., Seibert, J., and Staudinger, M. (2018). Modeling of Future Changes in Seasonal Snowpack and Impacts on Summer Low Flows in Alpine Catchments. *Water Resources Research*, 54(1):538–556.
- Jensen, H. and Lang, H. (1973). Forecasting discharge from a glaciated basin in the Swiss Alps. *Role of Snow and Ice in Hydrology, Proceedings of symposia held at Banff, September 1972, IAHS Publ. no 107*, 2:1047–1057.
- Jordan, F., Boillat, J.-L., and Schleiss, A. (2010). Prévision et gestion des crues du Rhône supérieur par l'exploitation optimale des retenues alpines. *La Houille Blanche*, (5):91–102.
- Jordan, J. P., Laglaine, V., and Hohl, P. (1990). A comparative assessment of two approaches to evaluate anthropogenic effects on flood events in mountainous regions. In *Hydrology in Mountainous Regions. I - Hydrological Measurements; the Water Cycle (Proceedings of two Lausanne Symposia, August 1990)*. IAHS Publ. no. 193, pages 565–572.
- Jörg-Hess, S., Griessinger, N., and Zappa, M. (2015). Probabilistic Forecasts of Snow Water Equivalent and Runoff in Mountainous Areas. *Journal of Hydrometeorology*, 16(5):2169–2186.
- Junghans, N., Cullmann, J., and Huss, M. (2011). Evaluating the effect of snow and ice melt in an Alpine headwater catchment and further downstream in the River Rhine. *Hydrological Sciences Journal*, 56(6):981–993.
- Junker, J., Heimann, F. U. M., Hauer, C., Turowski, J. M., Rickenmann, D., Zappa, M., and Peter, A. (2015). Assessing the impact of climate change on brown trout (*Salmo trutta fario*) recruitment. *Hydrobiologia*, 751(1):1–21.
- Karsten, J. and Ebel, M. (2016). Advanced Flood Forecasting for Switzerland. In *13th International INTERPRAEVENT Congress, EMERGENCY MANAGEMENT (EMERGENCY PLANNING, EARLY WARNING, INTERVENTION, RECOVERY)*, pages 917–926, Lucerne, Switzerland.

- Kauffeldt, A., Wetterhall, F., Pappenberger, F., Salamon, P., and Thielen, J. (2016). Technical review of large-scale hydrological models for implementation in operational flood forecasting schemes on continental level. *Environmental Modelling & Software*, 75:68–76.
- Kavetski, D. and Fenicia, F. (2011a). Elements of a flexible approach for conceptual hydrological modeling: 2. Application and experimental insights. *Water Resources Research*, 47(11).
- Kavetski, D. and Fenicia, F. (2011b). Elements of a flexible approach for conceptual hydrological modeling: 2. Application and experimental insights. *Water Resources Research*, 47(11):1–19.
- Keller, H. M. and Forster, F. (1991). *Simulating soil moisture and runoff components to estimate variability of streamflow chemistry*, pages 143–151.
- Keller, L., Zischg, A. P., Mosimann, M., Rössler, O., Weingartner, R., and Martius, O. (2019). Large ensemble flood loss modelling and uncertainty assessment for future climate conditions for a Swiss pre-alpine catchment. *Science of the Total Environment*, 693.
- Kleinn, J., Frei, C., Gurtz, J., Vidale, P. L., and Schär, C. (2005). Hydrologic simulations in the Rhine basin driven by a regional climate model. *Journal of Geophysical Research*, 110(D4).
- Kneis, D. (2015). A lightweight framework for rapid development of object-based hydrological model engines. *Environmental Modelling and Software*, 68:110–121.
- Knijff, J. M. V. D., Younis, J., and Roo, A. P. J. D. (2010). LISFLOOD: a GIS-based distributed model for river basin scale water balance and flood simulation. *International Journal of Geographical Information Science*, 24(2):189–212.
- Knoben, W. J. M., Freer, J. E., Fowler, K. J. A., Peel, M. C., and Woods, R. A. (2019). Modular Assessment of Rainfall-Runoff Models Toolbox (MARRMoT) v1.0: an open-source, extendable framework providing implementations of 46 conceptual hydrologic models as continuous space-state formulations. *Geoscientific Model Development Discussions*, pages 1–26.
- Kobierska, F., Jonas, T., Magnusson, J., Zappa, M., Bavay, M., Bosshard, T., Paul, F., and Bernasconi, S. M. (2011). Climate change effects on snow melt and discharge of a partly glacierized watershed in Central Switzerland (SoilTrec Critical Zone Observatory). *Applied Geochemistry*, 26:S60–S62.
- Kobierska, F., Jonas, T., Zappa, M., Bavay, M., Magnusson, J., and Bernasconi, S. M. (2013). Future runoff from a partly glacierized watershed in Central Switzerland: A two-model approach. *Advances in Water Resources*, 55:204–214.
- Konz, M., Chiari, M., Rimkus, S., Turowski, J. M., Molnar, P., Rickenmann, D., and Burlando, P. (2011). Sediment transport modelling in a distributed physically based hydrological catchment model. *Hydrology and Earth System Sciences*, 15(9):2821–2837.
- Köplin, N., Schädler, B., Viviroli, D., and Weingartner, R. (2012). Relating climate change signals and physiographic catchment properties to clustered hydrological response types. *Hydrology and Earth System Sciences*, 16(7):2267–2283.
- Köplin, N., Schädler, B., Viviroli, D., and Weingartner, R. (2013). The importance of glacier and forest change in hydrological climate-impact studies. *Hydrology and Earth System Sciences*, 17(2):619–635.

- Köplin, N., Viviroli, D., Schädler, B., and Weingartner, R. (2010). How does climate change affect mesoscale catchments in Switzerland? – a framework for a comprehensive assessment. *Advances in Geosciences*, 27:111–119.
- Kumar, R., Samaniego, L., and Attinger, S. (2013). Implications of distributed hydrologic model parameterization on water fluxes at multiple scales and locations. *Water Resources Research*, 49(1):360–379.
- Lehning, M., Bartelt, P., Brown, B., and Fierz, C. (2002a). A physical SNOWPACK model for the Swiss avalanche warning Part III: Meteorological forcing, thin layer formation and evaluation. *Cold Regions Science and Technology*, 35(3):169–184.
- Lehning, M., Bartelt, P., Brown, B., Fierz, C., and Satyawali, P. (2002b). A physical SNOWPACK model for the Swiss avalanche warning. *Cold Regions Science and Technology*, 35(3):147–167.
- Lehning, M., Völksch, I., Gustafsson, D., Nguyen, T. A., Stähli, M., and Zappa, M. (2006). ALPINE3D: a detailed model of mountain surface processes and its application to snow hydrology. *Hydrological Processes*, 20(10):2111–2128.
- Liang, X., Lettenmaier, D. P., Wood, E. F., and Burges, S. J. (1994). A simple hydrologically based model of land surface water and energy fluxes for general circulation models. *Journal of Geophysical Research*, 99(D7).
- Liechti, K., Zappa, M., Fundel, F., and Germann, U. (2013). Probabilistic evaluation of ensemble discharge nowcasts in two nested Alpine basins prone to flash floods. *Hydrological Processes*, 27(1):5–17.
- Lindström, G., Johansson, B., Persson, M., Gardelin, M., and Bergström, S. (1997). Development and test of the distributed HBV-96 hydrological model. *Journal of Hydrology*, 201(1-4):272–288.
- Lindström, G., Pers, C., Rosberg, J., Strömqvist, J., and Arheimer, B. (2010). Development and testing of the HYPE (Hydrological Predictions for the Environment) water quality model for different spatial scales. *Hydrology Research*, 41(3-4):295–319.
- Liu, Z. and Todini, E. (2002). Towards a comprehensive physically-based rainfall-runoff model. *Hydrology and Earth System Sciences*, 6(5):859–881.
- Loon, A. F. V. (2015). Hydrological drought explained. *Wiley Interdisciplinary Reviews: Water*, 2(4):359–392.
- Ludwig, K. and Bremicker, M. (2006). The Water Balance Model LARSIM: Design, Content and Applications. Technical report, Freiburger Schriften zur Hydrologie 22, Institut für Hydrologie der Universität Freiburg, Freiburg.
- Lugiez, G., Kasser, P., Jensen, H., and Guillot, P. (1969). La prevision des debits du Rhin - un exemple de collaboration internationale en hydrologie; forecast of the discharge for river Rhine - an example of international cooperation in hydrology. *La Houille Blanche*, 7:733–746.
- Marty, C., Schögl, S., Bavay, M., and Lehning, M. (2017). How much can we save? Impact of different emission scenarios on future snow cover in the Alps. *The Cryosphere*, 11(1):1–37.
- Mastrotheodoros, T., Pappas, C., Molnar, P., Burlando, P., Hadjidoukas, P., and Fatichi, S. (2019). Ecohydrological dynamics in the Alps: Insights from a modelling analysis of the spatial variability. *Ecohydrology*, 12(1):1–18.

- Mastrotheodoros, T., Pappas, C., Molnar, P., Burlando, P., Manoli, G., Parajka, J., Rigon, R., Szeles, B., Bottazzi, M., Hadjidoukas, P., and Fatichi, S. (2020). More green and less blue water in the Alps during warmer summers. *Nature Climate Change*, 10(2):155–161.
- McMillan, H., Booker, D., and Cattoën, C. (2016). Validation of a national hydrological model. *Journal of Hydrology*, 541:800–815.
- Melsen, L., Teuling, A., Torfs, P., Zappa, M., Mizukami, N., Clark, M., and Uijlenhoet, R. (2016). Representation of spatial and temporal variability in large-domain hydrological models: Case study for a mesoscale pre-Alpine basin. *Hydrology and Earth System Sciences*, 20(6):2207–2226.
- Michel, A., Brauchli, T., Lehning, M., Schaeffli, B., and Huwald, H. (2020). Stream temperature and discharge evolution in Switzerland over the last 50 years: annual and seasonal behaviour. *Hydrology and Earth System Sciences*, 24(1):115–142.
- Milano, M., Reynard, E., Bosshard, N., and Weingartner, R. (2015a). Simulating future trends in hydrological regimes in Western Switzerland. *Journal of Hydrology: Regional Studies*, 4:748–761.
- Milano, M., Reynard, E., Köplin, N., and Weingartner, R. (2015b). Climatic and anthropogenic changes in Western Switzerland: Impacts on water stress. *Science of the Total Environment*, 536:12–24.
- Molin, M. D., Kavetski, D., and Fenicia, F. (2020). SuperflexPy 1.2.0 : an open source Python framework for building , testing and improving conceptual hydrological models. *Geoscientific Model Development Discussions*.
- Monhart, S., Zappa, M., Spirig, C., Schär, C., and Bogner, K. (2019). Subseasonal hydrometeorological ensemble predictions in small- and medium-sized mountainous catchments: benefits of the NWP approach. *Hydrology and Earth System Sciences*, 23(1):493–513.
- Müller-Thomy, H. and Sikorska-Senoner, A. E. (2019). Does the complexity in temporal precipitation disaggregation matter for a lumped hydrological model? *Hydrological Sciences Journal*, 64(12):1453–1471.
- Murphy, J. T., Altaweel, M., Ozik, J., and Lammers, R. B. (2019). Understanding institutions for water allocation and exchange: Insights from dynamic agent-based modeling. *Wiley Interdisciplinary Reviews: Water*, 6(6).
- Naef, F. (1977). *Ein Vergleich von mathematischen Niederschlag-Abfluss-Modellen*. PhD thesis, ETH Zürich. Versuchsanstalt für Wasserbau, Hydrologie und Glaziologie; der ETHZ; Mitteilung Nr.26. Diss. Techn.Wiss. ETH Zürich, Nr. 6044, 0000. Ref.: Vischer, D. ; Korref.: Dracos, T..
- Naef, F. (1981). Can we model the rainfall-runoff process today? *Hydrological Sciences - Bulletin*, 26:9/281–289.
- Orth, R., Staudinger, M., Seneviratne, S. I., Seibert, J., and Zappa, M. (2015). Does model performance improve with complexity? A case study with three hydrological models. *Journal of Hydrology*, 523:147–159.
- Pappas, C., Fatichi, S., Rimkus, S., Burlando, P., and Huber, M. O. (2015). The role of local-scale heterogeneities in terrestrial ecosystem modeling. *Journal of Geophysical Research: Biogeosciences*, 120(2):341–360.

- Paschalis, A., Fatichi, S., Molnar, P., Rimkus, S., and Burlando, P. (2014). On the effects of small scale space–time variability of rainfall on basin flood response. *Journal of Hydrology*, 514:313–327.
- Peel, M. C. and McMahon, T. A. (2020). Historical development of rainfall-runoff modeling. *WIREs Water*, 7(5).
- Peleg, N., Blumensaat, F., Molnar, P., Fatichi, S., and Burlando, P. (2017). Partitioning the impacts of spatial and climatological rainfall variability in urban drainage modeling. *Hydrology and Earth System Sciences*, 21(3):1559–1572.
- Pushpalatha, R., Perrin, C., Le Moine, N., Mathevet, T., and Andréassian, V. (2011). A downward structural sensitivity analysis of hydrological models to improve low-flow simulation. *Journal of Hydrology*, 411(1-2):66–76.
- Queloz, P., Carraro, L., Benettin, P., Botter, G., Rinaldo, A., and Bertuzzo, E. (2015). Transport of fluorobenzoate tracers in a vegetated hydrologic control volume: 2. Theoretical inferences and modeling. *Water Resources Research*, 51(4):2793–2806.
- Ragetti, S. and Pellicciotti, F. (2012). Calibration of a physically based spatially distributed hydrological model in a glacierized basin: On the use of knowledge from glaciometeorological processes to constrain model parameters. *Water Resources Research*, 48(3).
- Rahman, K., da Silva, A. G., Tejada, E. M., Gobiet, A., Beniston, M., and Lehmann, A. (2015). An independent and combined effect analysis of land use and climate change in the upper Rhone River watershed, Switzerland. *Applied Geography*, 63:264–272.
- Rahman, K., Etienne, C., Gago-Silva, A., Maringanti, C., Beniston, M., and Lehmann, A. (2014). Streamflow response to regional climate model output in the mountainous watershed: a case study from the Swiss Alps. *Environmental Earth Sciences*, 72(11):4357–4369.
- Raymond Pralong, M., Turowski, J. M., Rickenmann, D., and Zappa, M. (2015). Climate change impacts on bedload transport in alpine drainage basins with hydropower exploitation. *Earth Surface Processes and Landforms*, 40(12):1587–1599.
- Richards, L. A. (1931). Capillary conduction of liquids through porous mediums. *Journal of Applied Physics*, 1(5):318–333.
- Rigling, A. and Stähli, M. (2020). Erkenntnisse aus der Trockenheit 2018 für die zukünftige Waldentwicklung. *Schweizerische Zeitschrift für Forstwesen*, 171(5):242–248.
- Rosbjerg, D. and Madsen, H. (2005). Concepts of Hydrologic Modeling. In *Encyclopedia of Hydrological Sciences*, chapter 10, pages 1–9.
- Rössler, O. and Brönnimann, S. (2018). The effect of the Tambora eruption on Swiss flood generation in 1816/1817. *Science of the Total Environment*, 627:1218–1227.
- Rössler, O., Diekkrüger, B., and Löffler, J. (2012). Potential drought stress in a Swiss mountain catchment - Ensemble forecasting of high mountain soil moisture reveals a drastic decrease, despite major uncertainties. *Water Resources Research*, 48(4):1–19.
- Rössler, O., Froidevaux, P., Börst, U., Rickli, R., Martius, O., and Weingartner, R. (2014). Retrospective analysis of a nonforecasted rain-on-snow flood in the Alps-A matter of model limitations or unpredictable nature? *Hydrology and Earth System Sciences*, 18(6):2265–2285.

- Rössler, O., Kotlarski, S., Fischer, A. M., Keller, D., Liniger, M., and Weingartner, R. (2019). Evaluating the added value of the new Swiss climate scenarios for hydrology: An example from the Thur catchment. *Climate Services*, 13(January):1–13.
- Rottler, E., Bronstert, A., Bürger, G., and Rakovec, O. (2020). Projected changes in Rhine River flood seasonality under global warming. *Hydrol. Earth Syst. Sci. Discuss.*, (November):1–25.
- Samaniego, L., Kumar, R., and Attinger, S. (2010). Multiscale parameter regionalization of a grid-based hydrologic model at the mesoscale. *Water Resources Research*, 46(5):1–25.
- Sautier, J.-L. and Delleur, J.-W. (1980). Calibration et analyse de sensibilité du modèle de simulation continue de l'écoulement STORM. *La Houille Blanche*, (4-5):339–344.
- Schaefli, B., Hingray, B., and Musy, A. (2007a). Climate change and hydropower production in the Swiss Alps: quantification of potential impacts and related modelling uncertainties. *Hydrology and Earth System Sciences*, 11(3):1191–1205.
- Schaefli, B., Hingray, B., Niggli, M., and Musy, A. (2005). A conceptual glacio-hydrological model for high mountainous catchments. *Hydrology and Earth System Sciences Discussions*, 9(1):95–109.
- Schaefli, B. and Huss, M. (2011). Integrating point glacier mass balance observations into hydrologic model identification. *Hydrology and Earth System Sciences*, 15:1227–1241.
- Schaefli, B., Nicótina, L., Imfeld, C., Da Ronco, P., Bertuzzo, E., and Rinaldo, A. (2014). SEHR-ECHO v1.0: A spatially explicit hydrologic response model for ecohydrologic applications. *Geoscientific Model Development*, 7(6):2733–2746.
- Schaefli, B., Talamba, D. B., and Musy, A. (2007b). Quantifying hydrological modeling errors through a mixture of normal distributions. *Journal of Hydrology*, 332(3-4):303–315.
- Schattan, P., Zappa, M., Lischke, H., Bernhard, L., Thürig, E., and Diekkrüger, B. (2013). An approach for transient consideration of forest change in hydrological impact studies. In *IAHS-AISH Proceedings and Reports*, volume 359, pages 311–319.
- Schirmer, M., Leschik, S., and Musolff, A. (2013). Current research in urban hydrogeology – A review. *Advances in Water Resources*, 51:280–291.
- Schulla, J. (2009). Model Description WaSiM (Water balance Simulation Model). Technical report, Hydrology Software Consulting J. Schulla.
- Schulla, J. and Jasper, K. (2007). Model description WaSiM-ETH (Water balance Simulation Model ETH). Technical report.
- Seibert, J. and Vis, M. J. P. (2012). Teaching hydrological modeling with a user-friendly catchment-runoff-model software package. *Hydrology and Earth System Sciences*, 16(9):3315–3325.
- Shakoor, A., Burri, A., Bavay, M., Ejaz, N., Ghumman, A. R., Comola, F., and Lehning, M. (2018). Hydrological response of two high altitude Swiss catchments to energy balance and temperature index melt schemes. *Polar Science*, 17(June):1–12.
- Sikorska, A., Viviroli, D., and Seibert, J. (2017). Effective precipitation duration for runoff peaks based on catchment modelling. *Journal of Hydrology*, 556:510–522.

- Sikorska, A. E. and Seibert, J. (2016). Value of different precipitation data for flood prediction in an alpine catchment: A Bayesian approach. *Journal of Hydrology*, 556:961–971.
- Sikorska, A. E. and Seibert, J. (2018). Appropriate temporal resolution of precipitation data for discharge modelling in pre-alpine catchments. *Hydrological Sciences Journal*, 63(1):1–16.
- Sikorska-Senoner, A., Schaefli, B., and Seibert, J. (2020). Downsizing parameter ensembles for simulations of extreme floods. *Natural Hazards and Earth System Sciences*, (March):1–38.
- (SNFS), S. N. R. C. (2021). NRP 31 Climatic Changes and Natural Hazards.
- Solomatine, D. and Wagener, T. (2011). Hydrological Modeling. In *Treatise on Water Science*, pages 435–457. Elsevier.
- Speich, M. J., Bernhard, L., Teuling, A. J., and Zappa, M. (2015). Application of bivariate mapping for hydrological classification and analysis of temporal change and scale effects in Switzerland. *Journal of Hydrology*, 523:804–821.
- Stahl, K., Weiler, M., Freudiger, D., Kohn, I., Seibert, J., and Vis, M., Gerlinger, K., and Böhm, M. (2017). *The snow and glacier melt components of the streamflow of the River Rhine and its tributaries considering the influence of climate change*. Final report to the International Commission for the Hydrology of the Rhine basin (CHR).
- Stähli, M., Kruse, S., Fundel, F., Zappa, M., Stahl, K., Bernhard, L., and Seidl, I. (2013). drought.ch – auf dem Weg zu einer Trockenheits-Informationsplattform für die Schweiz. *Wasser Energie Luft*, 105(2):117–121.
- Staudinger, M. and Seibert, J. (2014). Predictability of low flow - An assessment with simulation experiments. *Journal of Hydrology*, 519(PB):1383–1393.
- Staudinger, M., Stahl, K., and Seibert, J. (2014). A drought index accounting for snow. *Water Resources Research*, 50(10):7861–7872.
- Staudinger, M., Weiler, M., and Seibert, J. (2015). Quantifying sensitivity to droughts—an experimental modeling approach. *Hydrology and Earth System Sciences*, 19(3):1371–1384.
- Stucki, P., Bandhauer, M., Heikkilä, U., Rössler, O., Zappa, M., Pfister, L., Salvisberg, M., Froidevaux, P., Martius, O., Panziera, L., and Brönnimann, S. (2018). Reconstruction and simulation of an extreme flood event in the Lago Maggiore catchment in 1868. *Natural Hazards and Earth System Sciences*, 18(10):2717–2739.
- Swiss Federal Office for the Environment, F. (2019). Hydrological models and quality of forecasts.
- Tague, C. L., Papuga, S. A., Gerlein-Safdi, C., Dymond, S., Morrison, R. R., Boyer, E. W., Riveros-Iregui, D., Agee, E., Arora, B., Dialynas, Y. G., Hansen, A., Krause, S., Kuppel, S., Loheide, S. P., Schymanski, S. J., and Zipper, S. C. (2020). Adding our leaves: A community-wide perspective on research directions in ecohydrology. *Hydrological Processes*, 34(7):1665–1673.
- Terrier, S., Bieri, M., Jordan, F., and Schleiss, A. J. (2015). Impact du retrait glaciaire et adaptation du potentiel hydroélectrique dans les Alpes suisses. *Houille Blanche*, (1):93–101.

- Thielen, J., Bartholmes, J., Ramos, M.-H., and de Roo, A. (2009). The European Flood Alert System – Part 1: Concept and development. *Hydrology and Earth System Sciences*, 13(2):125–140.
- Thober, S., Cuntz, M., Kelbling, M., Kumar, R., Mai, J., and Samaniego, L. (2019). The multiscale routing model mRM v1.0: simple river routing at resolutions from 1 to 50 km. *Geoscientific Model Development*, 12(6):2501–2521.
- Thornton, J. M., Mariethoz, G., Brauchli, T. J., and Brunner, P. (2019). Efficient multi-objective calibration and uncertainty analysis of distributed snow simulations in rugged alpine terrain. *The Cryosphere Discussions*, (September):1–48.
- Todini, E. (1995). New Trends in Modelling Soil Processes from Hillslope to GCM Scales. In *The Role of Water and the Hydrological Cycle in Global Change*, pages 317–347. Springer Berlin Heidelberg, Berlin, Heidelberg.
- Todini, E. and Ciarapica, L. (2002). The Topkapi Model. In *Mathematical models of large watershed hydrology*, pages 471–506.
- Uhlmann, B., Jordan, F., and Beniston, M. (2012). Modelling runoff in a Swiss glacierized catchment-Part II: daily discharge and glacier evolution in the Findelen basin in a progressively warmer climate. *International Journal of Climatology*, 33(5):1301–1307.
- Uhlmann, B., Jordan, F., and Beniston, M. (2013). Modelling runoff in a Swiss glacierized catchment-part I: Methodology and application in the Findelen basin under a long-lasting stable climate. *International Journal of Climatology*, 33(5):1293–1300.
- Valéry, A., Andréassian, V., and Perrin, C. (2014a). 'As simple as possible but not simpler': What is useful in a temperature-based snow-accounting routine? Part 1 - Comparison of six snow accounting routines on 380 catchments. *Journal of Hydrology*, 517:1166–1175.
- Valéry, A., Andréassian, V., and Perrin, C. (2014b). 'As simple as possible but not simpler': What is useful in a temperature-based snow-accounting routine? Part 2 – Sensitivity analysis of the Cemaneige snow accounting routine on 380 catchments. *Journal of Hydrology*, 517:1176–1187.
- van den Heuvel, D. B., Troch, P. A., Booij, M. J., Niu, G. Y., Volkmann, T. H. M., and Pangle, L. A. (2018). Effects of differential hillslope-scale water retention characteristics on rainfall-runoff response at the Landscape Evolution Observatory. *Hydrological Processes*, 32(13):2118–2127.
- van Esse, W. R., Perrin, C., Booij, M. J., Augustijn, D. C. M., Fencia, F., Kavetski, D., and Lobligeois, F. (2013). The influence of conceptual model structure on model performance: a comparative study for 237 French catchments. *Hydrology and Earth System Sciences*, 17(10):4227–4239.
- van Osnabrugge, B. (2020). *Interpolate simulate, assimilate: operational aspects of improving hydrological forecasts in the Rhine basin*. PhD thesis, Wageningen University.
- van Osnabrugge, B., Uijlenhoet, R., and Weerts, A. (2019). Contribution of potential evaporation forecasts to 10-day streamflow forecast skill for the Rhine River. *Hydrology and Earth System Sciences*, 23(3):1453–1467.
- van Osnabrugge, B., Weerts, A. H., and Uijlenhoet, R. (2017). genRE: A Method to Extend Gridded Precipitation Climatology Data Sets in Near Real-Time for Hydrological Forecasting Purposes. *Water Resources Research*, 53(11):9284–9303.

- Verbunt, M., Walser, A., Gurtz, J., Montani, A., and Schär, C. (2007). Probabilistic flood forecasting with a limited-area ensemble prediction system: Selected case studies. *Journal of Hydrometeorology*, 8(4):897–909.
- Verbunt, M., Zappa, M., Gurtz, J., and Kaufmann, P. (2006). Verification of a coupled hydrometeorological modelling approach for alpine tributaries in the Rhine basin. *Journal of Hydrology*, 324(1-4):224–238.
- Viviroli, D., Mittelbach, H., Gurtz, J., and Weingartner, R. (2009a). Continuous simulation for flood estimation in ungauged mesoscale catchments of Switzerland – Part II: Parameter regionalisation and flood estimation results. *Journal of Hydrology*, 377(1-2):208–225.
- Viviroli, D. and Seibert, J. (2015). Can a regionalized model parameterisation be improved with a limited number of runoff measurements? *Journal of Hydrology*, 529(P1):49–61.
- Viviroli, D., Zappa, M., Gurtz, J., and Weingartner, R. (2009b). An introduction to the hydrological modelling system PREVAH and its pre- and post-processing-tools. *Environmental Modelling & Software*, 24(10):1209–1222.
- Viviroli, D., Zappa, M., Schwanbeck, J., Gurtz, J., and Weingartner, R. (2009c). Continuous simulation for flood estimation in ungauged mesoscale catchments of Switzerland – Part I: Modelling framework and calibration results. *Journal of Hydrology*, 377(1-2):191–207.
- Wanders, N., Thober, S., Kumar, R., Pan, M., Sheffield, J., Samaniego, L., and Wood, E. F. (2019). Development and Evaluation of a Pan-European Multimodel Seasonal Hydrological Forecasting System. *Journal of Hydrometeorology*, 20(1):99–115.
- Weiler, M. and Beven, K. (2015). Do we need a Community Hydrological Model? *Water Resources Research*, 51(9):7777–7784.
- Werner, M., Schellekens, J., Gijsbers, P., van Dijk, M., van den Akker, O., and Heynert, K. (2013). The Delft-FEWS flow forecasting system. *Environmental Modelling & Software*, 40:65–77.
- Westerberg, I. K., Sikorska-Senoner, A. E., Viviroli, D., Vis, M., and Seibert, J. (2020). Hydrological model calibration with uncertain discharge data. *Hydrological Sciences Journal*, 00(00):1–16.
- Wever, N., Comola, F., Bavay, M., and Lehning, M. (2017). Simulating the influence of snow surface processes on soil moisture dynamics and streamflow generation in an alpine catchment. *Hydrology and Earth System Sciences*, 21(8):4053–4071.
- WMO, W. M. O. (1992). *International glossary of hydrology, 2nd edition*.
- WMO, W. M. O. (2012). *International Glossary of Hydrology, 3rd edition*.
- Young, P. C. and Minchin, P. E. (1991). Environmetric time-series analysis: modelling natural systems from experimental time-series data. *International Journal of Biological Macromolecules*, 13(3):190–201.
- Zappa, M. (2008). Objective quantitative spatial verification of distributed snow cover simulations - An experiment for the whole of Switzerland. *Hydrological Sciences Journal*, 53(1):179–191.
- Zappa, M., Bernhard, L., Fundel, F., and Jörg-Hess, S. (2012). Vorhersage und Szenarien von Schnee- und Wasserressourcen im Alpenraum. *Forum für Wissen*, pages 19–27.

- Zappa, M. and Gurtz, J. (2003). Simulation of soil moisture and evapotranspiration in a soil profile during the 1999 MAP-Riviera Campaign. *Hydrology and Earth System Sciences*, 7(6):903–919.
- Zappa, M., Jaun, S., Germann, U., Walser, A., and Fundel, F. (2011). Superposition of three sources of uncertainties in operational flood forecasting chains. *Atmospheric Research*, 100(2-3):246–262.
- Zappa, M. and Kan, C. (2007). Extreme heat and runoff extremes in the Swiss Alps. *Natural Hazards and Earth System Sciences*, 7(3):375–389.
- Zappa, M., Liechti, K., Winstral, A., and Barben, M. (2019). Trockenheit in der Schweiz: Vergleich der Jahre 2003, 2015 und 2018. *Wasser Energ. Luft*, 111(2):95–100.
- Zappa, M., Rotach, M. W., Arpagaus, M., Dorninger, M., Hegg, C., Montani, A., Ranzi, R., Ament, F., Germann, U., Grossi, G., Jaun, S., Rossa, A., Vogt, S., Walser, A., Wehrhan, J., and Wunram, C. (2008). MAP D-PHASE: real-time demonstration of hydrological ensemble prediction systems. *Atmospheric Science Letters*, 9(2):80–87.
- Zarrineh, N., Abbaspour, K. C., and Holzkämper, A. (2020). Integrated assessment of climate change impacts on multiple ecosystem services in Western Switzerland. *Science of the Total Environment*, 708:135212.
- Zarrineh, N., Abbaspour, K. C., van Griensven, A., Jeangros, B., and Holzkämper, A. (2018). Model-based evaluation of land management strategies with regard to multiple ecosystem services. *Sustainability (Switzerland)*, 10(11).
- Zeimetz, F., Schaepli, B., Artigue, G., García Hernández, J., and Schleiss, A. J. (2017). Relevance of the correlation between precipitation and the 0 °C isothermal altitude for extreme flood estimation. *Journal of Hydrology*, 551:177–187.
- Zeimetz, F., Schaepli, B., Artigue, G., Hernández, J. G., and Schleiss, A. J. (2018a). New approach to identifying critical initial conditions for extreme flood simulations in a semi-continuous simulation framework. *Journal of Hydrologic Engineering*, 23(8):1–9.
- Zeimetz, F., Schaepli, B., Artigue, G., Hernández, J. G., and Schleiss, A. J. (2018b). New Approach to Identifying Critical Initial Conditions for Extreme Flood Simulations in a Semi-continuous Simulation Framework. *Journal of Hydrologic Engineering*, 23(8):04018031.
- Zierl, B. and Bugmann, H. (2005). Global change impacts on hydrological processes in Alpine catchments. *Water Resources Research*, 41:W02028.