

**This manuscript is a preprint** which has been submitted for publication. It has **not undergone peer review** yet. Subsequent versions of this manuscript may have slightly different content. If accepted, the final version of this manuscript will be available via the 'Peer-reviewed Publication DOI' link on the right-hand side of this webpage. Please feel free to contact any of the authors; we welcome feedback.

# A diffuse interface method for earthquake rupture dynamics based on a phase-field model

Jorge N. Hayek<sup>1</sup>, Dave A. May<sup>2</sup>, Casper Pranger<sup>1</sup>, Alice-Agnes Gabriel<sup>2,1</sup>

<sup>1</sup>Department of Earth and Environmental Sciences, Ludwig-Maximilians-Universität München, Munich, Germany

<sup>2</sup>Scripps Institution of Oceanography, UC San Diego, 9500 Gilman Drive, La Jolla, CA 92093, USA

## Key Points:

- We develop an open-source diffuse interface method based on a phase-field implemented in spectral elements
- Dynamic earthquake rupture models in a diffuse fault zone differ from discrete fault models
- Our phase-field approach can address the volumetric nature of faulting in physics-based earthquake modeling

## Abstract

In traditional modeling approaches, earthquakes are often depicted as displacement discontinuities across zero-thickness surfaces embedded within a linear elastodynamic continuum. This simplification, however, overlooks the intricate nature of natural fault zones and may fail to capture key physical phenomena integral to fault processes. Here, we propose a diffuse interface description for dynamic earthquake rupture modeling to address these limitations and gain deeper insight into fault zones' multifaceted volumetric failure patterns, mechanics, and seismicity. Our model leverages a steady-state phase-field, implying time-independent fault zone geometry, which is defined by the contours of a signed distance function relative to a virtual fault plane. Our approach extends the classical stress glut method, adept at approximating fault-jump conditions through inelastic alterations to stress components. We remove the sharp discontinuities typically introduced by the stress glut approach via our spatially smooth, mesh-independent fault representation while maintaining the method's inherent logical simplicity within the well-established spectral element method framework. We verify our approach using 2D numerical experiments in an open-source spectral element implementation, examining both a kinematically driven Kostrov-like crack and spontaneous dynamic rupture in diffuse fault zones. The capabilities of our methodology are showcased through mesh-independent planar and curved fault zone geometries. Moreover, we highlight that our phase-field-based diffuse rupture dynamics models contain fundamental variations within the fault zone. Dynamic stresses intertwined with a volumetrically applied friction law give rise to oblique plastic shear and fault reactivation, markedly impacting rupture front dynamics and seismic wave radiation. Our results encourage future applications of phase-field-based earthquake modeling.

## Plain language summary

Faults are zones of broken and damaged materials, with a fault core region full of fractures. When we simulate earthquakes, we usually simplify these faults to flat planes that experience friction while situated within a host rock. A different way to represent faults in these simulations is using the 'stress glut' method which models the faults as areas where the earth's crust gives way under stress. But this method can be problematic, leading to inaccuracies, particularly when a fault crosses a grid cell of the computational domain used for model calculations. We tackle this issue by applying a method that smooths out the stress field using a steady-state phase-field model. We find that our method can recreate realistic earthquake behavior while avoiding the sharp transitions that often occur in traditional models. We test our smooth method by simulating conditions where the fault doesn't align with any grid lines in our model. We notice some key differences in the stress field and earthquake dynamics near the leading edge of the rupture, brought about by the complex behavior of the diffuse fault. Our method retains the simplicity of the stress glut approach, making it easy to incorporate into existing earthquake simulation software.

**Keywords:** Earthquake dynamics – Computational seismology – Dynamics and mechanics of faulting – Numerical modeling

## 1 Introduction

The mechanics of slip in natural fault networks is a multiscale and multiphysics problem. Observations reveal volumetric fault zone complexities in large ruptures (e.g., Chester & Chester, 1998; Klinger et al., 2018), small earthquakes (e.g., in the San Jacinto fault zone, Cheng et al., 2018), and even in laboratory events (e.g. high-velocity friction experiments, Passelègue et al., 2016). This complexity is influenced by factors such as inelastic deformation within a larger volume around the principal slip zone (i.e. off-fault damage, Cappa et al., 2014; Perrin et al., 2016), by geometrically complex fault structures (e.g. Weldon II & Springer, 1988; C. W. D. Milliner et al., 2015; C. Milliner et al.,

2021), and by variable rheological properties within the fault zone (e.g. Chester & Logan, 1986; Faulkner et al., 2003).

Earthquakes can be described as frictional shear fracture of brittle solids along pre-existing weak interfaces (i.e. fault zones). The slip evolution then depends on a friction law, the fault constitutive properties and initial conditions, as well as the fault geometry and the off-fault material. Fault zone complexity promotes the generation of high frequency seismic wave radiation. Such complexity includes stress localization and spatial variation of fault strength (Madariaga, 1977, 1983; Withers et al., 2018; Okubo et al., 2019) and fault system interaction (Boore & Joyner, 1978; Kame & Uchida, 2008; Marty et al., 2019).

In dynamic earthquake rupture simulations, faults are typically idealized as infinitesimally thin interfaces with distinct on- versus off-fault rheologies (e.g., Andrews, 2005; Ben-Zion & Shi, 2005; Templeton & Rice, 2008; Dunham et al., 2011; Harris et al., 2011; Gabriel et al., 2013; Harris et al., 2018; Okubo et al., 2019). While progress toward mesh-independent co-seismic faulting representations exists (Cruz-Atienza & Virieux, 2004; Benjema et al., 2007; Tavelli et al., 2019a; Gabriel et al., 2021; Pranger et al., 2022), geometrical complexities usually have to be explicitly represented in the spatial discretization of the computational domain (e.g., Galvez et al., 2014; Chaljub et al., 2015) for example by using unstructured tetrahedral meshes in high order Discontinuous Galerkin methods (de la Puente et al., 2009; Wollherr et al., 2018; Ulrich et al., 2019; Uphoff et al., 2022). However, the geometry and mesh generation process is often laborious (e.g. Chaljub et al., 2010; Ramos et al., 2022). Alternatives may include using representations of strong discontinuities at the subelement level using the eXtended Finite Element Method (XFEM) (Moës et al., 1999; Liu & Borja, 2013) or expressing nonplanar faults through curvilinear coordinate transformations (e.g. Z. Zhang et al., 2014; Duru & Dunham, 2016). A so-called *smeared interface* approach diffuses sharp cracks via smooth transitions between intact and fully damaged material states (e.g., De Borst et al., 2004; Mirzabozorg & Ghaemian, 2005). Recently, unified thermodynamically consistent frameworks have been formulated for the smeared modeling of crack and earthquake rupture propagation (Tavelli et al., 2019b; Gabriel et al., 2021) in a Discontinuous Galerkin framework (Reinarz et al., 2020), that allow for complex geometries and the use of adaptive mesh refinement, but require non-trivial constitutive parameter selection.

The spectral element method (SEM) has been a method of choice in the computational seismology community for simulating wave propagation in heterogeneous and homogeneous media (Komatitsch & Tromp, 1999). It aims to combine the geometrical flexibility of the finite element method with the accuracy of spectral methods interpolating with high-order basis functions (e.g., Igel, 2017). The SEM is well suited for highly non-linear problems with non-smooth solutions, including simulations of dynamic rupture (Festa & Vilotte, 2006; Kaneko et al., 2008) using a split-node approach (Day et al., 2005) and hexahedral spectral elements e.g., Galvez et al. (2014). SEM allows using non-linear off-fault plasticity (Gabriel et al., 2013) and continuum damage (Xu et al., 2015) but requires, similar to other established dynamic rupture modeling methods, to explicitly discretize fault discontinuities.

An alternative approach for representing a fault as a material discontinuity is the inelastic zone or *stress glut* method. Backus and Mulcahy (1976) termed *stress glut* the stress mismatch of a purely elastic medium and the true physical stress. The stress glut method was first established within the context of kinematic earthquake source descriptions, where the region of non-zero stress glut is the internal source (Bukchin, 1995; McGuire et al., 2001, 2002; Clévéde et al., 2004; Chen et al., 2005; McGuire, 2017; Jordan & Juarez, 2019, 2020, 2021). The stress glut (Andrews, 1999) and the thick fault zone (Madariaga et al., 1998) methods in the context of dynamic rupture modeling have been implemented in the finite difference method (Andrews, 1976; Madariaga et al., 1998; Andrews, 1999; Dalguer & Day, 2006; Herrendörfer et al., 2018; Preuss et al., 2019). There, the stress glut approximates the fault-jump conditions through inelastic increments to the stress compo-

nents in an inelastic zone that is one grid cell wide. While the thick fault method leads to qualitative disagreement, the stress glut method produces qualitatively consistent results with the discontinuous reference solutions. However, it features inherently poor convergence with mesh refinement irrespective of the order of the finite difference approximation that was used (Dalguer & Day, 2006). While these inherent challenges have somewhat dampened interest in the stress glut method for dynamic rupture earthquake modeling, we demonstrate in this study that a novel stress glut phase-field adaption can yield quantitatively consistent results to discrete fault reference solutions and empirical earthquake frictional behavior.

A classical phase-field approach has not yet been applied to fully dynamic earthquake rupture modeling. Phase-field approaches introduce a scalar phase-field, which varies between 0 and 1, to represent the degree of damage of the material (e.g., Bourdin et al., 2000). One major advantage of “field-based” approaches is that fractures need not be explicitly meshed - thus enabling the simulation of spontaneous fracture development (e.g., Bourdin et al., 2008). Critical ingredients of the phase-field formulation are rooted in fracture mechanics, specifically by incorporating a critical fracture energy, which is translated into the regularized continuum sense of gradient damage mechanics (Miehe & Schänzel, 2014). For shear fracture, which is dominating earthquake processes, theoretical methods have been proposed (e.g., Spatschek et al., 2011) and applied for brittle fracture in rock-like materials under constant normal pressure (e.g., X. Zhang et al., 2017; Fei & Choo, 2020, 2021). Recently this work has been extended to incorporate a rate- and state-dependent friction law in a promising antiplane quasi-dynamic phase-field model of fault growth and off-fault damage (Fei et al., 2023).

Here, we modify the concept of stress glut and apply it for the first time in a spectral element method. We combine the method with a spatially smooth and mesh-independent fault representation in a steady-state phase-field approach. We represent the fault geometry as the *zero level set* of a signed distance function (SDF). We demonstrate that in the phase-field framework, dynamic crack propagation can be handled as a standard multi-field problem by using conventional finite element methods. We note that the methodology described in this paper is not strongly tied to a continuous Galerkin or spectral element method but is in principle applicable to a discontinuous Galerkin approach for wave propagation (Wilcox et al., 2010; Dumbser & Käser, 2006).

Our approach and its numerical implementation are explained in Sections 2 and 3. We verify our approach in Section 4 by performing kinematic and dynamic rupture benchmarks and by comparing our diffuse fault results to those of discrete fault modeling. We explore the flexibility of modeling dynamic rupture mesh independently by generalizing the fault geometry to inclined and curved planes not aligning with the prescribed computational mesh. In Section 5, we compare our approach against alternative diffuse crack models, discuss limitations, and anticipate future developments.

## 2 A phase-field modified stress glut approach

In this section, we formulate an implicit description of a diffuse fault geometry by means of the signed distance function. This description enables us to construct an in-fault reference frame that defines an embedded subdomain. In this sub-region, anelastic deformation can take place as a consequence of frictional yielding, in which the friction coefficient is a function of time or displacement. Using these ingredients, we present an extension of the stress glut method using the phase-field mathematical notion.

### 2.1 A diffuse fault representation using the signed distance function

In this paper, we use the term “diffuse fault” to refer to a fault description of finite thickness. All applications developed in this study model earthquake slip on diffuse faults that are resolved by at least two spectral elements in width. Given an explicit description of a fault as, e.g., a parametric curve  $\boldsymbol{x}_f = \boldsymbol{x}_f(a)$ ,  $\boldsymbol{x}_f \in \mathbb{R}^2$ ,  $a \in \mathbb{R}$  embedded in the 2D

space  $\Omega \subseteq \mathbb{R}^2$ , we construct an implicit model of the same geometry by defining a field  $\varphi(\mathbf{x}) \in \mathbb{R}$ ,  $\mathbf{x} \in \Omega$  that satisfies the following properties:

1. At each point  $\mathbf{x} \in \Omega$ ,  $|\varphi(\mathbf{x})|$  measures the Euclidean distance to the point on the curve  $\mathbf{x}_f(a)$  that is nearest to it in the same Euclidean sense, i.e.:  $|\varphi(\mathbf{x})| = \inf_{\Omega} \|\mathbf{x} - \mathbf{x}_f(a)\|_2$ .
2. The sign of the field  $\varphi(\mathbf{x})$  (denoted via  $\text{sgn}(\varphi)$ ) is informally given by the side on which the coordinate  $\mathbf{x}$  is with respect to the curve  $\mathbf{x}_f$ . More formally, given a value for the parameter  $a_* = a_*(\mathbf{x})$  that minimizes the Euclidean distance between the points  $\mathbf{x}$  and  $\mathbf{x}_f(a_*)$ , we can define a fault-normal vector  $\hat{\mathbf{v}} = \mathbf{x} - \mathbf{x}_f(a_*)$  and a fault-tangent vector  $\hat{\mathbf{w}} = \mathbf{x}'_f(a_*)$ , and arbitrarily but consistently assign  $\text{sgn}(\varphi(\mathbf{x})) = \text{sgn}(\hat{w}_1 \hat{v}_2 - \hat{w}_2 \hat{v}_1)$ , the sign of the rotation from  $\hat{\mathbf{v}}$  into  $\hat{\mathbf{w}}$ .

A field that has these properties is called a *signed distance function* (SDF) of the curve  $\mathbf{x}_f$ , and the original curve is partially recovered as the unordered *level set*  $\Gamma = \{\mathbf{x} : \varphi(\mathbf{x}) = 0\}$ . In the following discussion we will assume to only have access to the signed distance function and will forgo reference to the parametric curve  $\mathbf{x}_f(a)$  and its parameter  $a$ . In this regard, the method readily generalizes to a three-dimensional space embedding a fault as a two-dimensional manifold.

We define a right-handed orthonormal fault-local reference frame that is spanned by the normal vector  $\mathbf{n}(\mathbf{x}) = -\nabla\varphi(\mathbf{x})$  (which is a unit vector since  $|\nabla\varphi(\mathbf{x})| = 1$  by definition) and a tangential vector  $\mathbf{t} = [n_2, -n_1]$ . In this case,  $\mathbf{n}$  points from the negative side of the fault to the positive side of the fault, but this is a rather arbitrary convention, much like the handedness of the fault-local coordinate system.

Here we use the SDF to extend the lower-dimensional fault interface to a finite sub-region  $\Sigma \subset \Omega$  that is delineated by the  $\pm\delta$  level sets of the SDF, i.e.  $\Sigma = \{\mathbf{x} \in \Omega : -\delta \leq \varphi(\mathbf{x}) \leq +\delta\}$ . On account of the smooth nature of the SDF, it can represent a fault in a manner independent of the mesh resolution and orientation as long as the local curvature of the fault plane itself is well resolved.

To implement slip or slip rate dependent friction laws or evaluate results of time-dependent source descriptions, we project material displacement ( $\mathbf{u}$ ) and velocity ( $\mathbf{v}$ ) vectors onto the  $\pm\delta$  level sets. For a given coordinate  $\mathbf{x} \in \Sigma$ , we compute two related coordinates on opposing sides of the fault as follows:

$$\mathbf{x}^+(\mathbf{x}) := \mathbf{x} + (\delta - \varphi(\mathbf{x}))\mathbf{n} \quad (1a)$$

$$\mathbf{x}^-(\mathbf{x}) := \mathbf{x} - (\delta + \varphi(\mathbf{x}))\mathbf{n} \quad (1b)$$

the effective slip  $S$  is then calculated as

$$S(\mathbf{x}) = |[\mathbf{u}(\mathbf{x}^+(\mathbf{x})) - \mathbf{u}(\mathbf{x}^-(\mathbf{x}))] \cdot \mathbf{t}(\mathbf{x})|, \quad (2)$$

and the effective slip rate  $\dot{S}$  is calculated similarly. This procedure generalizes the mesh-aligned stress glut implementation of Andrews (1999). The magnitudes of shear and normal tractions  $\tau$  and  $\sigma_n$  on the fault are expressed throughout the diffuse fault subdomain  $\Sigma$  as


$$\tau := \mathbf{n} \cdot \overline{\overline{\boldsymbol{\sigma}}} \cdot \mathbf{t}, \quad (3a)$$

$$\sigma_n := \mathbf{n} \cdot \overline{\overline{\boldsymbol{\sigma}}} \cdot \mathbf{n}, \quad (3b)$$

where  $\overline{\overline{\boldsymbol{\sigma}}}$  is the Cauchy stress tensor and the normal stress  $\sigma_n$  is negative under compression. Figure 1 illustrates the geometric quantities introduced above which are associated with the diffuse fault representation.

## 2.2 Yielding and friction in the diffuse fault stress glut approach

In this work, we assume a friction coefficient  $\mu = \mu(t, \mathbf{x}, S, \dot{S}, \dots)$  that is a function of time  $t$ , position, slip, slip rate, and potentially other variables as well. Such a general description of the friction law encompasses the time-dependent Kostrov crack model and

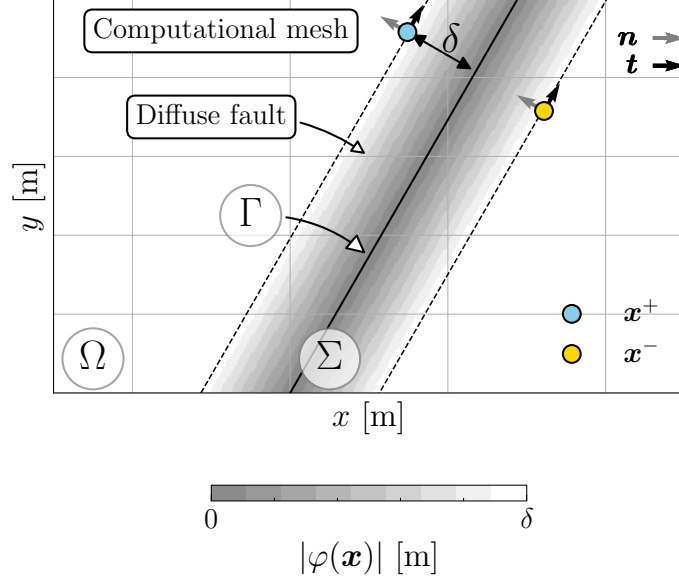

**Figure 1.** Schematic of the diffuse fault representation using the signed distance function. The mesh independent fault indicator  $\varphi(\mathbf{x})$  is defined within an inelastic zone width of  $2\delta$  and acts in the subdomain  $\Sigma \subset \Omega$ . The blue and yellow circles indicate the projected coordinate pairs  $\mathbf{x}^+$  and  $\mathbf{x}^-$  at a distance  $\delta$  from the zero level set on opposite sides of the fault, as described in the text of Section 2.1. Each circle includes the fault local orientation axis  $(\mathbf{t}, \mathbf{n})$ .

the linear slip weakening law that we use in this work to verify our method. We note that other frictional constitutive equations will be supported as well as, e.g., the rate and state friction law (Dieterich, 1981; Ruina, 1983). A cohesionless frictional yield criterion  $\tau_c$  is stated as

$$\begin{aligned} |\tau(t, \mathbf{x})| &\leq \tau_c(t, \mathbf{x}, S, \dot{S}, \dots) \\ &:= -\mu(t, \mathbf{x}, S, \dot{S}, \dots) \min(0, \sigma_n(t, \mathbf{x})). \end{aligned} \quad (4)$$

The truncation to negative values of normal stress effectively means that free slip (zero shear stress) conditions are applied under tension, in line with the fracture mechanics theory of Palmer and Rice (1973). Note that Day et al. (2005) describes an alternative treatment of jump conditions for tensile stresses; which may be explored in future developments of our approach.

A stress state outside of the yield envelope can be relaxed back onto it in the direction of shear stress by applying a plastic correction, which we write as

$$\bar{\bar{\boldsymbol{\sigma}}}_f = \bar{\bar{\boldsymbol{\sigma}}}_e - [\tau - \tau_c \operatorname{sgn} \tau] [\mathbf{n} \otimes \mathbf{t} + \mathbf{t} \otimes \mathbf{n}], \quad (5)$$

where the subscript  $f$  on the modified stress tensor denotes fault or friction, and the subscript  $e$  denotes *elastic*. The map  $\bar{\bar{\boldsymbol{\sigma}}}_e \rightarrow \bar{\bar{\boldsymbol{\sigma}}}_f$  for stress states that are outside of the yield envelope is achieved in plasticity models in a more subtle way by introducing a plastic strain increment of unknown magnitude and solving for said magnitude such that stress equals strength. This subtlety is not needed in the stress glut approach, as will be further clarified in the following. Under shear failure, the introduction of the stress limiter develops a transversely isotropic constitutive behavior with a plane of isotropy perpendicular to the direction  $\mathbf{n}$ . See Sharples et al. (2016) for an extensive examination of the formulation and behavior of transversely isotropic materials in failure. In addition, we introduce an additional term in the yielding criterion in Eq. (4). This change aims to

include the implicit assumptions in traditional planar interface models. Its effects are further described in Section 4 and analyzed in Section 5.1.

The change in the fault normal displacement field is negligible in planar fault representations for mode II faults at interfacial node pairs. In our diffuse fault representation, this may no longer be the case, and to link both representations, we consider a yielding criterion that neglects the shear contribution from the term  $G (\nabla(\mathbf{u} \cdot \mathbf{n})) \cdot \mathbf{t}$  which is the along-strike derivative of the normal to the fault component of the displacement field. Then such criterion becomes

$$|\tau - G (\nabla(\mathbf{u} \cdot \mathbf{n})) \cdot \mathbf{t}| \leq \tau_c, \quad (6)$$

where  $G$  is the shear modulus.

In the following, we refer to the yielding criterion introduced in Eq. (4) as “*volumetric yielding*”, while we refer to the inequality criterion which neglects the shear contribution of the fault normal displacement field as described in Eq. (6) as “*interface yielding*”. The simplifying assumption of negligible fault normal displacements of the interface yielding may introduce numerical artifacts within a wide diffuse fault zone, which we further discuss in Appendix C. We will find that the volumetric yielding criterion is preferred for continuous fault zone representations throughout Section 4.

A major challenge associated with the classical stress glut method is the inherently sharp transition between on-fault and off-fault rheologies, which can lead to poor convergence properties and spurious oscillations, especially if the boundaries of the fault zone  $\Sigma$  intersect with grid cells (Madariaga et al., 1998; Dalguer & Day, 2006). This situation frequently occurs when modeling the fault independent of the mesh through level sets of the signed distance function as described in this work. To address this difficulty, we define a time-invariant and smooth parameter  $\phi \in [0, 1]$  based on the signed distance function, i.e.  $\phi = \phi(\varphi)$ , with  $\phi(0) \approx 1$  and  $\lim_{\varphi \gg \delta} \phi(\varphi) = 0$ . We suggest here to take a function  $\phi(\varphi)$  of the form:

$$\phi(\varphi, A, \varphi_c) = \frac{1}{2}(1 - \tanh(A[|\varphi| - \varphi_c])), \quad (7)$$

where  $A, \varphi_c$  are positive, nonzero parameters that influence the nature of the smooth transition from within the inelastic continuous fault zone to the elastic matrix of the host rock. Eq. (7) is motivated by the steady-state equilibrium profile obtained in thermodynamically derived phase-field models (Beckermann et al., 1999), where it describes the phase-field parameter variation normal to a given interface (Sun & Beckermann, 2007).

A stress tensor that is *smoothly* distributed over the domain  $\Sigma$  but *approximately* satisfying the yield limit (4) everywhere can be redefined as

$$\begin{aligned} \overline{\overline{\boldsymbol{\sigma}}}_f(t, \mathbf{x}) &= \overline{\overline{\boldsymbol{\sigma}}}_e(t, \mathbf{x}) \\ &\quad - \phi(\varphi(\mathbf{x})) [\tau - \tau_c \operatorname{sgn} \tau](t, \mathbf{x}) [\mathbf{n} \otimes \mathbf{t} + \mathbf{t} \otimes \mathbf{n}](\mathbf{x}). \end{aligned} \quad (8)$$

### 2.3 Elastodynamics of dynamic rupture

The elastic stress tensor is given by the constitutive relation

$$\overline{\overline{\boldsymbol{\sigma}}} = 2G\overline{\overline{\boldsymbol{\varepsilon}}} + \lambda \operatorname{tr}(\overline{\overline{\boldsymbol{\varepsilon}}})\mathbb{I} = \overline{\overline{\mathbf{C}}} : \overline{\overline{\boldsymbol{\varepsilon}}}, \quad (9)$$

where  $\overline{\overline{\mathbf{C}}}$  is the fourth order constitutive tensor, composed of the Lamé parameters  $\lambda, G$ ;  $\mathbb{I}$  is the second order unit tensor, and  $\overline{\overline{\boldsymbol{\varepsilon}}}$  is the strain tensor defined as the symmetric gradient of the displacement  $\mathbf{u}$ :

$$\overline{\overline{\boldsymbol{\varepsilon}}} = \frac{1}{2} [\nabla \mathbf{u} + (\nabla \mathbf{u})^T]. \quad (10)$$

The dynamic momentum balance governs the wave-mediated evolution of friction on the fault and is expressed as

$$\rho \frac{\partial^2 \mathbf{u}}{\partial t^2} = \nabla \cdot \overline{\overline{\boldsymbol{\sigma}}}, \quad (11)$$



where  $\rho$  is the density. The problem is closed and applying boundary conditions on the fault, further explained in Section 3 and model-specific initial conditions that are given in Section 4. In all models presented, we impose a free-surface boundary condition along the entire boundary of  $\Omega$ , that is we enforce  $\overline{\boldsymbol{\sigma}}\mathbf{n} = \mathbf{0}$  on  $\partial\Omega$ .

### 3 Numerical implementation

#### 3.1 Spectral elements for a phase-field method

We use *se2dr*, a rupture dynamics extension of the stress glut method of Andrews (1999), implemented in the 2D wave propagation spectral element method *se2wave* using the high-level library *PETSc* (Abhyankar et al., 2018; Balay et al., 1997, 2019, 2020), as our linear algebra backend.

Our implementation uses a structured quadrilateral mesh to discretize the domain  $\Omega$ . The SEM nodal basis is given by a Lagrange polynomial, which in combination with a Gauss-Legendre-Lobatto quadrature rule, the discretization results in a diagonal mass matrix  $\mathbf{M}$ . By construction, the SEM discretization allows for the flexibility of having locally (element-wise) defined material coefficient ( $\rho, \lambda, G$ ) over the domain and also localized stresses element-wise. *se2wave* wave propagation functionality has been previously applied in Yuan et al. (2021).

We use an explicit Newmark method as the time integration scheme, a conventional choice for wave propagation problems in SEM (Komatitsch & Tromp, 1999, 2002; Peter et al., 2011), which allows the direct solution of a system of second-order differential equations. Within the Newmark family, we adopt the explicit central differences rule scheme (Hughes, 2000). The computation of the internal forces and the application of the dynamic fault constraints in the procedure is further described here below.

For the calculation of the internal forces step, we compute the stress tensor at each quadrature point by using the discrete version of

$$\mathbf{y} = \nabla \cdot \overline{\boldsymbol{\sigma}}, \quad (12)$$

where  $\mathbf{y}$  is an arbitrary vector. Using Voigt notation, the divergence of stress shown in Eq. (12) is given by

$$\mathbf{y} = \mathbf{B}^T \boldsymbol{\sigma} = \begin{pmatrix} \frac{\partial}{\partial x} & 0 & \frac{\partial}{\partial y} \\ 0 & \frac{\partial}{\partial y} & \frac{\partial}{\partial x} \end{pmatrix} \begin{pmatrix} \sigma_{xx} \\ \sigma_{yy} \\ \sigma_{xy} \end{pmatrix}, \quad (13)$$

where  $\boldsymbol{\sigma} = (\sigma_{xx}, \sigma_{yy}, \sigma_{xy})^T$  is the Voigt representation of the stress tensor  $\overline{\boldsymbol{\sigma}}$ . Similarly, the strain is described as  $\boldsymbol{\varepsilon} = (\varepsilon_{xx}, \varepsilon_{yy}, 2\varepsilon_{xy})^T$ , which we calculate from a displacement field as  $\boldsymbol{\varepsilon} = \mathbf{B}\mathbf{u}$ . We then relate both stress and strain vectors under the linear, isotropic relation in the same notation as

$$\boldsymbol{\sigma} = \mathbf{C}\boldsymbol{\varepsilon} = \begin{pmatrix} 2G + \lambda & \lambda & 0 \\ \lambda & 2G + \lambda & 0 \\ 0 & 0 & G \end{pmatrix} \begin{pmatrix} \varepsilon_{xx} \\ \varepsilon_{yy} \\ 2\varepsilon_{xy} \end{pmatrix}. \quad (14)$$

We damp spurious oscillations generated along fault by using viscous Kelvin-Voigt damping. For this, we add a term  $\eta\dot{\boldsymbol{\varepsilon}}$  to the calculation of the elastic stress field. There, the viscous relaxation time  $\eta = 0.3 \Delta t$ , and  $\Delta t$  is the simulation time step, inspired after the Kelvin-Voigt damping parameters in Galvez et al. (2014).

To implement our stress glut extension, we modify the Voigt stress vector within  $\Sigma$  according to a friction law under a yield criterion. In our case, we use the stress components in a fault-local orientation  $\sigma_n$  and  $\tau$  to evaluate the yield criterion.

The stress modification is summarized in the algorithm 1.

#### 3.2 Numerical discretization

Numerical modeling for seismic wave propagation typically acts as a low-pass filter, accurately propagating low frequencies through the mesh, whilst high frequencies undergo

---

**Algorithm 1** Pseudocode for the stress modification scheme with the diffuse fault representation.

---

**Input:**  $\varepsilon, \varphi, \delta, \mathbf{n}, \mathbf{t}$  and material parameters at quadrature point. For the Kelvin-Voigt damping, we use  $\dot{\varepsilon}$ , and  $\eta$ , the viscous relaxation time.

**Output** Updated Voigt stress vector  $\boldsymbol{\sigma}_f$  at quadrature point

```

1:  $\boldsymbol{\sigma} \leftarrow \mathbf{C}(\varepsilon + \eta \dot{\varepsilon})$ 
2: if  $|\varphi| > \delta$  then ▷ Pure elastic matrix
3:    $\boldsymbol{\sigma}_f \leftarrow \boldsymbol{\sigma}$ 
4: else ▷ Embedded crack subdomain
5:    $\boldsymbol{\sigma} \leftarrow \boldsymbol{\sigma} + \boldsymbol{\sigma}_{bg}$  ▷ Add background stress
   Calculate the fault local normal and tangential stress components
6:    $\sigma_n = \overline{\boldsymbol{\sigma}} : (\mathbf{n} \otimes \mathbf{n})$ 
7:    $\tau = \overline{\boldsymbol{\sigma}} : (\mathbf{n} \otimes \mathbf{t})$ 
   Evaluate the friction coefficient  $\mu$  following the corresponding friction law to calculate
   the yielding stress
8:    $\tau_c \leftarrow \mu \min(\sigma_n, 0)$  ▷ Free-slip for tensile normal stress
9:   if  $|\tau| > \tau_c$  then ▷ Failure criterion reached
10:     $\boldsymbol{\sigma}_f \leftarrow \boldsymbol{\sigma} + \phi(\varphi)[\tau_c \operatorname{sgn}(\tau) - \tau](\mathbf{n} \otimes \mathbf{t} + \mathbf{t} \otimes \mathbf{n})$ 
11:   else ▷ Failure criterion not met
12:     $\boldsymbol{\sigma}_f \leftarrow \boldsymbol{\sigma}$ 
13:   end if
14:    $\boldsymbol{\sigma}_f \leftarrow \boldsymbol{\sigma}_f - \boldsymbol{\sigma}_{bg}$  ▷ Remove background stress
15: end if

```

---

undesired alteration due to numerical dispersion and dissipation (Marfurt, 1984; Seriani & Priolo, 1994). The upper limit of the resolved frequency, conventionally called  $f_{max}$  (Hanks, 1982), can be quantified in terms of a number of grid points or elements per shortest wavelength. In the context of SEM, the number of nodes per minimum wavelength follows

$$N_G = \frac{p \zeta_{min}}{h}, \quad (15)$$


where  $p$  is the polynomial degree to represent the basis functions within a  $\mathcal{Q}_p$  element of size  $h$ . We use these parameters to define the spatial resolution of our SEM simulations. The minimum wavelength is defined as

$$\zeta_{min} = \min(V_s)/f_{max}. \quad (16)$$

For all simulations shown here (unless otherwise stated), we use  $\mathcal{Q}_3$  elements. Each element contains  $4 \times 4$  Gauss-Legendre-Lobatto integration points with an average spacing of  $\Delta x = h/3$ .

#### 4 Kinematic and dynamic rupture earthquake modeling

We have introduced our steady-state phase-field stress glut method as a diffuse interface approach. Here, we apply this approach to earthquake modeling. We explore two well-defined problems: Kostrov's kinematically driven self-similar crack (Kostrov, 1964) and the spontaneous dynamic rupture SCEC benchmark TPV3 (Harris et al., 2009). Both these problems consider in-plane, mode II rupture propagation. We use *SEM2DPAK* (Ampuero, 2012) to provide discrete fault reference solutions, and compare results by evaluating time series of slip and slip rate at specific points along the fault for *SEM2DPAK* and our *se2dr* implementation. We set the reference solutions with elements of polynomial order 6 and a cell refinement  $h = 100$  m for both kinematic and dynamic models. The phase-field smoothing parameters are set to  $A = 12/\delta$ ,  $\varphi_c = 0.65 \delta$  based on manual calibration.

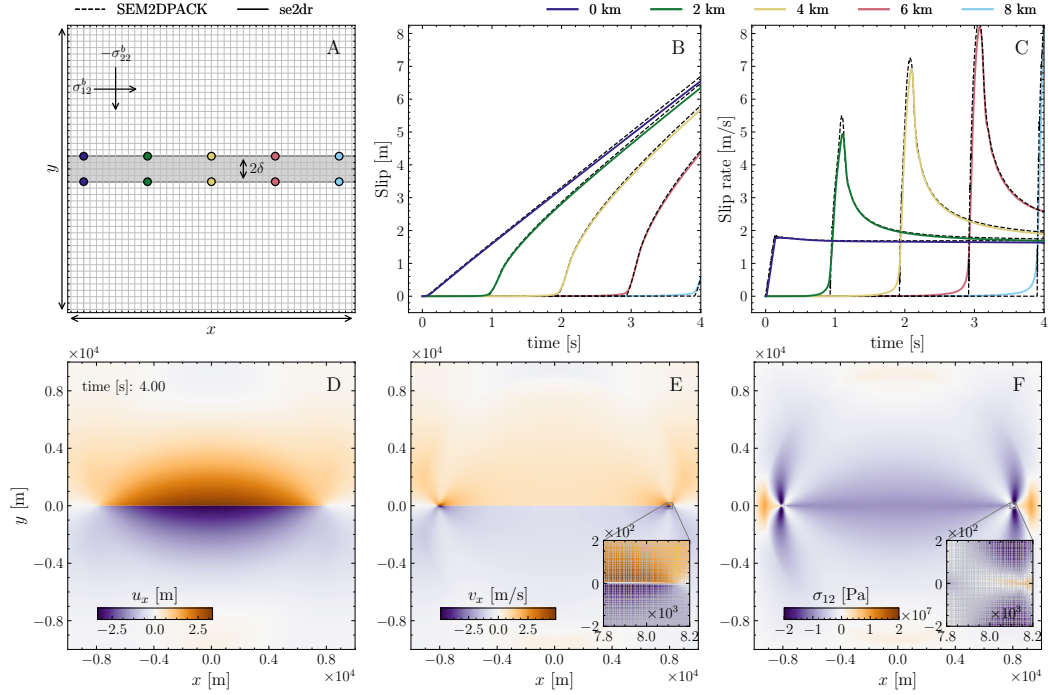

**Figure 2.** Phase-field stress glut model results for a kinematic Kostrov crack with the mesh-aligned configuration using our diffuse fault zone approach. The model portrays an in-plane right-lateral shear fracture under compression using the volumetric yielding criterion. The structured mesh is composed of square  $\mathcal{Q}_3$  elements with a width of  $h = 25$  m. The fault zone half thickness equals one element width,  $\delta = h$ . The model evolves for 4 s of simulation time. (A) Illustrates the embedded fault in the mesh and the distribution of the receiver pairs at increasing along-strike distance from the hypocenter indicated by color, where the slip and slip rates are extracted. The next subfigures include our adopted metric of (B) slip and (C) slip rate profiles in continuous lines, compared against a SEM split node discrete fault reference solution as dashed lines. We also show the corresponding x-component snapshots at  $t = 4$  s for the (D) displacement, (E) velocity, and (F) shear stress.

Parameter	Value
Density ( $\rho$ )	2500 kg m <sup>-3</sup>
P-wave velocity ( $V_p$ )	4000 m s <sup>-1</sup>
S-wave velocity ( $V_s$ )	2309 m s <sup>-1</sup>
Rupture speed ( $V_r$ )	2000 m s <sup>-1</sup>
Normal stress ( $\sigma_{22}^b$ )	40 MPa
Shear stress ( $\sigma_{12}^b$ )	20 MPa
Characteristic distance ( $L$ )	250 m
$\mu_s$	0.5
$\mu_d$	0.25

**Table 1.** Parameters describing our Kostrov-like self-similarly propagating kinematic shear crack model.

#### 4.1 Kinematic self-similar Kostrov crack

In the following, we vary fault geometry by first considering a straight, mesh-aligned but diffuse fault. Then we rotate this diffuse fault to not align with the computational mesh, expecting comparable results in important aspects. Finally, we perturb the straight diffuse fault geometry to achieve a curved, sigmoidal geometry. This last model configuration deviates from the reference benchmarks and solutions but provides important information on the geometrical flexibility of our approach. Kostrov’s non-singular self-similar shear crack is driven by a time-weakening friction law

$$\mu(x_\Gamma, t) = \max\{\mu_d, \mu_s - (\mu_s - \mu_d)(V_r t - |x_\Gamma|)/L\}, \quad (17)$$

where rupture evolves under a prescribed constant rupture propagation velocity  $V_r$  and  $L$  is the characteristic slip distance. The friction coefficient decreases from a static friction coefficient  $\mu_s$  to a dynamic friction coefficient  $\mu_d$ . This model assumes that the rupture starts from the origin and propagates self-similarly along the fault defined as  $x_\Gamma = \int_\Gamma \sqrt{1 + (dx_f(a)/da)^2} da$ . Our model assumes a homogeneous isotropic elastic medium and a predefined fault interface loaded by background normal and shear tractions as defined by Madariaga et al. (1998). The setup allows for analysis of the phase-field relations between fault slip, slip rate, and shear stress under imposed tractions which avoids the full complexity of spontaneous rupture dynamics. The model parameters are summarized in table 1. We solve our problem in a domain that spans a 20 km  $\times$  20 km area, with a fault length spanning throughout the domain.

In this first model, we demonstrate that a phase-field simulation can resemble a discrete fault solution in difference to previous findings analyzing thick fault or stress glut fault approaches (Dalguer & Day, 2006; Preuss et al., 2019). Figure 2 summarizes the setup and results of a horizontal Kostrov-like kinematic crack simulation performed with squared  $\mathcal{Q}_3$  and cell size  $h = 25$  m, using the volumetric yielding criterion (see Section 2.1), and fault zone half-width  $\delta = h$  (see Figure 2 A), plotted alongside the discrete SEM split-node reference solution. The phase-field solutions are computed in the diffuse interface model using Eq. (2)).

We observe close agreement between the diffuse interface and reference models in the time series of slip and slip rate, shown for 5 receiver-pairs located along the fault zone. Phase-field fault slip appears slightly smeared out at its onset and asymptotically very slightly underestimates the classical Kostrov crack solution (Figure 2 B). In the diffuse model, the slip rate peak is also slightly delayed and lower in amplitude with respect to the discrete fault reference. Analogous to the reference, slip rates asymptotically fall off after the rupture front has passed (Figure 2 C). The snapshot of particle displacement at 4 seconds simulation time (Figure 2 D) illustrates the smooth, well-resolved solution everywhere in our domain. The corresponding velocity and shear stress fields are equally

well resolved (Figure 2 E,F). The zoom-in to the fault zone reveals no out-of-plane rotation of the rupture tip. In general, the phase-field model does not introduce dynamic differences on the scale of the diffuse fault, in difference to what was seen in alternative diffuse interface simulations of the same benchmark (cf. Fig. 2 in Gabriel et al., 2021).

Changing the yielding criterion (Eq. (4) or (6)) will lead to only minor differences. The results using the volumetric yielding are smoother in comparison to the diffuse interface yielding criterion as shown in Appendix C, Figure C1(A)).

In our next example, we first demonstrate the mesh independence of our method. Second, we show that the increased demands on the accuracy of mesh-independent simulations can be addressed by using more elements to resolve the fault zone. We rotate the phase-field and stress tensors that constitute the fault geometry and initial conditions by  $20^\circ$  counter-clockwise from the first Kostrov-crack example. For our tilted configuration, we use the volumetric yielding criterion and a fault zone consisting of a total of 5 elements,  $\delta = 2.5h$ . Again, we use  $\mathcal{Q}_3$ -elements, and an element size  $h = 25$  m.

Figure 3 shows slip (A) and slip rate (B) time series recorded along the fault and the x-components of the displacement (C) and velocity fields (D) in the domain. We illustrate that the stress glut phase-field model captures the kinematics, i.e. the fault slip (A) and slip rate (B), of the now mesh-independently evolving self-similar Kostrov crack. The slip and slip rate amplitudes are slightly reduced compared to the split-node reference solution, The slip rate time series shows secondary complexities developing within the fault zone after the main rupture front has passed (also visible in D) that do not appear in the reference solution. The emanated seismic waves in terms of displacement (C) and velocity fields (D) are very smooth and agree with those generated in the previous mesh-aligned model.

In our first example, the diffuse fault was perfectly aligned with the element edges. Our smooth phase-field function defined in (7) was orthogonal to the element edges and reproduced the split-node reference solution using only two high-order elements,  $\delta = h$ . The tilted model using this minimal fault zone half-width  $\delta = h$  (low opacity lines in Figure 3(A, B)), however, produces significantly reduced slip rate amplitude. The slip rate profiles do not show the correct asymptotic behavior after the peak slip rate compared to the reference model and as was observed in the mesh-aligned configuration for the same fault zone resolution. We show in Figure 3(A, B) that the additional challenges of resolving crack propagation now not orthogonal to the element edges require higher accuracy, which can be achieved by using more elements to resolve our stress glut phase-field fault zone. Earlier smeared crack models (e.g. Rots & Blaauwendraad, 1989) have also considered resolving the crack thicknesses with more than 1-2 elements in their models, however, the stress glut approach has been restricted to using  $\delta = h$  in earlier work.

In Supplementary Figure C1(B), we show the results of the same model using the interface yielding criterion. In comparison to using a volumetric yielding criterion, we see small-scale deviations from the reference slip-rate time series. As we will discuss in the following dynamic rupture examples, these may result from physical fault zone effects. We conclude that for non-mesh-aligned phase-field models, more elements resolving the diffuse fault zone and using the volumetric yielding criterion are beneficial for quantitatively resembling discrete kinematic rupture propagation.

To further evaluate the geometrical flexibility of the method, we distort the planar Kostrov crack into a sigmoidal curve. The zero level set is parametrized as

$$\Gamma = \left\{ \left( a, A_s \frac{(1-k)a}{(1-2|a|)k+1} \right) \forall a \in \mathbb{R} \right\} \quad (18)$$

with parameters  $k \in (-1, 0)$  and  $A_s \in \mathbb{R}$ , which control the curvature and the scale of the function respectively. We make the particular choice to set  $k = -2 \times 10^{-4}$  and  $A_s = 2$ , which results in the sigmoidal fault configuration shown in Figure 4. In our

Parameter	In nucleation zone	Outside nucleation z.
Density $\rho$	2670 kg m <sup>-3</sup>	2670 kg m <sup>-3</sup>
P wave speed $V_p$	6000 m s <sup>-1</sup>	6000 m s <sup>-1</sup>
S wave speed $V_s$	3464 m s <sup>-1</sup>	3464 m s <sup>-1</sup>
Normal stress $\sigma_{22}^b$	120 MPa	120 MPa
Shear stress $\sigma_{12}^b$	81.6 MPa	70 MPa
Critical slip dist. $D_c$	0.40 m	0.40 m
Static friction $\mu_s$	0.677	0.677
Dynamic friction $\mu_d$	0.525	0.525

**Table 2.** Parameters describing the community benchmark TPV3 for a spontaneous dynamic rupture crack (Harris et al., 2018). Fault normal stress is negative under compression.

model, such a curve is prescribed as a discrete set of  $4 \times 10^5$  points. By performing a nearest neighbor search, we identify the closest point on the curve to the quadrature points and use it to initialize the phase-field throughout the domain. In future development, this can be replaced by, e.g., a fast marching method approach to enable a re-initialization at every time step.

Figure 4 shows the result for the sigmoid configuration using the volumetric yielding criterion, with blending parameters held equal to the tilted configuration, and a fault thickness of  $\delta = 2.5h$ . Its results lead to slip and slip rate profiles well comparable to the discrete fault reference solution, slightly reduced in amplitude, similar to the tilted configuration. Again, our slip rate shows small oscillations behind the rupture front. Note that here the kinematic model defines the background stress components in fault local coordinates, which implies for a curved geometry a spatially heterogeneous background stress. For this reason, metrics based on the sampling of the near field of a kinematic model are comparable to the metrics obtained from a planar simulation in Figure 3. Further away from the fault, the shear stress wavefield mapped on fault local coordinates shows larger regions of lowered differential stress located at the convex side of the curved fault.


## 4.2 Spontaneous dynamic rupture

We model dynamic earthquake rupture in the 2D version of the SCEC/USGS community benchmark problem TPV3 for elastic spontaneous rupture propagation (Harris et al., 2018). Our TPV3 configuration extends the kinematic Kostrov models to spontaneous dynamic rupture propagation. This model uses a linear slip weakening friction law (Ida, 1972) given by


$$\mu(x, t) = \max\{\mu_d, \mu_s - (\mu_s - \mu_d)|S(x, t)|/D_c\}, \quad (19)$$

where  $D_c$  is the critical slip distance, and  $S$  is the slip, which we extract from the displacement field, as in Eq. (2). The model contains a sharp overstressed nucleation patch that initiates self-sustained dynamic rupture. The patch is defined by a length of 3 km, and it is located within a fault of 30 km length as defined in Harris et al. (2009), within a 60 km  $\times$  60 km domain, and the conditions depicted in table 2.

We compare this model first in the mesh-aligned configuration in Figure 5. We find that the results are quantitatively comparable with the discrete fault reference solution of the TPV3 benchmark calculated with *SEM2DPAK*. In this example, we use the interface-yielding criterion. At around  $t = 0.6$  s, the rupture front leaves the overstressed nucleation region, propagating spontaneously along the planar fault. We observe in our results a slight delay in rupture speed compared to the reference solution by comparing the arrival times of the peak slip rate at the receivers along the fault. Comparable to the reference, the fault slip rate approaches an asymptotic fall-off behavior after the rupture

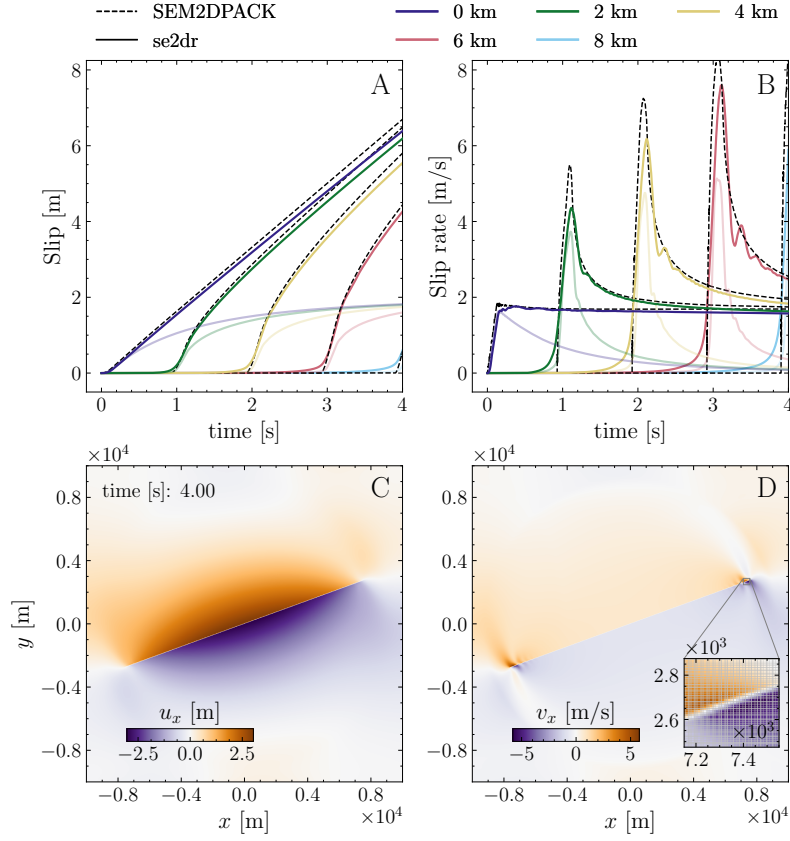

**Figure 3.** Phase-field stress glut model: Kostrov-like crack model under a tilted, mesh independent geometry. The model uses the same mesh and model parameters as in Figure 2, with a  $20^\circ$  counterclockwise tilting, relative to the mesh axis, and a wider fault zone ( $\delta = 2.5h$ ). The model uses the volumetric yielding criterion. The figure depicts (A) the slip profile and (B) the slip rate profile compared against a SEM split node discrete fault reference solution, at receiver pairs with increasing along-strike distance from the hypocenter indicated by color. Additionally, the figure contains the  $x$ -component of the (C) displacement and the (D) velocity field with an inlet focused on the propagating front. In (A) and (B), we highlight the effect of choosing fewer elements to resolve the fault zone width  $\delta$ , by plotting the slip and slip rate results of the same tilted model using  $\delta = h$  in lower opacity.

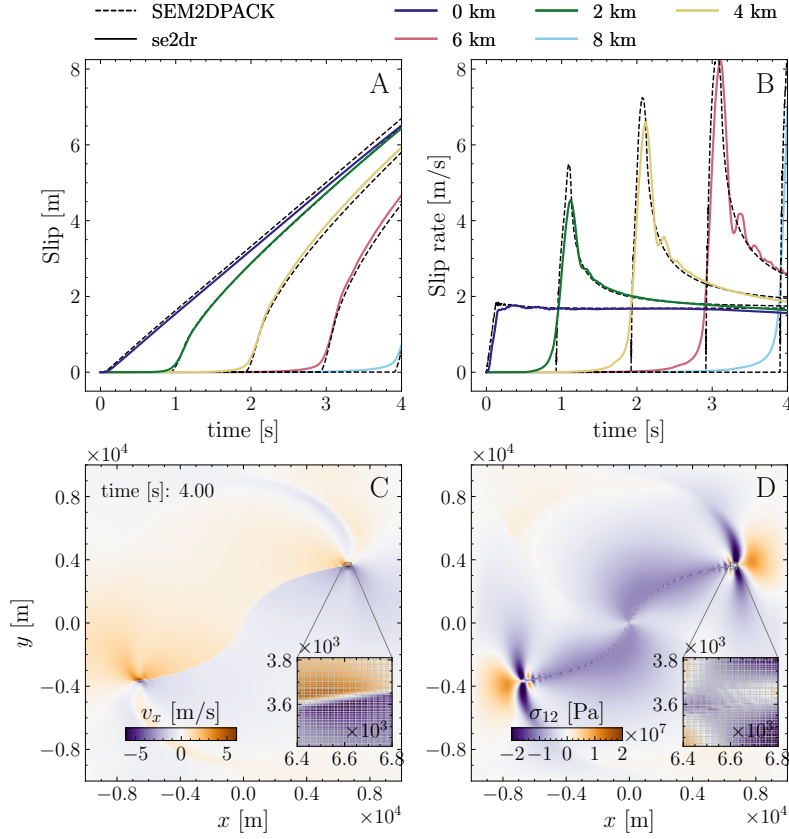

**Figure 4.** Phase-field stress glut model: Kostrov-like crack with a sigmoid shape. The model uses the same mesh parameters and thickness of the diffuse zone ( $\delta = 2.5h$ ) as in Figure 3. This configuration depicts a sigmoid shape with a zero-level set following Eq. (18), using the volumetric yielding criterion. The figure contains (A) the slip profile and (B) the slip rate profile compared against a SEM split node discrete fault reference solution, with receiver pairs at increasing along-strike distance from the hypocenter indicated by color, and (C) the  $x$ -component of the velocity field and (D) the shear component of the stress in fault local coordinates.



front has passed. The arrival of the stopping phases when the propagating rupture front reaches the fault edges is observed as an abrupt reduction of the slip rate magnitude after 6 s of simulation time, near the end of the profiles.


The mesh-aligned dynamic rupture solution using the volumetric yielding criterion shows a small secondary pulse in the slip rate profiles that originates at the transitional interface between the nucleation patch and the remainder of the fault zone. We find that the fault zone shear stress distribution at the sharp edge of the nucleation patch defined in the benchmark causes fault-oblique yielding across the full fault zone width. The resulting stress shadowing temporarily counteracts local yielding in the phase-field model, while a non-disturbed single spontaneous rupture front develops in the discrete fault reference. Later, with the continuous development of the stress field through time, this location also eventually reaches the yield surface, generating delayed reactivation at the hypocenter causing a secondary slip rate pulse.

Delayed, co-seismic fault reactivation has been reported in real earthquakes, such as during the 2019 northern Peru intraslab earthquake (Vallée et al., 2023), the 2011 Tohoku earthquake (Lee et al., 2011) and the 1984 Morgan Hill earthquake (Beroza & Spudich, 1988). Fault reactivation in discrete fault dynamic rupture simulations can be caused by several model complexities, including pulse-like rupture growing stresses after the passage of its healing front (Nielsen & Madariaga, 2003; Gabriel et al., 2012) and the presence of a fault damage zone, approximated as a low rigidity layer surrounding a discrete fault (Huang et al., 2014; Idini & Ampuero, 2020).


Figure 6(A) shows slip rates when using the volumetric yielding criterion. In comparison, introducing the interface yielding produces a solution closer to the discontinuous reference, free of secondary slip pulses, as seen in Figure 6(B). A comparison of these results against solutions using the interface yielding criterion is given in Appendix C.

As before for the Kostrov-like crack, we rotate the dynamic rupture model into a configuration that is out of alignment with the computational mesh (Figure 7). Our experiments show that our choice of fault thickness affects the rupture initiation process in our adaptation of the TPV3 benchmark with a fixed overstress as a direct consequence of setting the nucleation zone width equal to the variable width of the fault zone (i.e.  $2\delta$ ) within our fault representation. Figure 7 shows a numerical example that uses a fault half-thickness parameter  $\delta = 1.43h$ , which leads to the qualitatively expected behavior of the rupture. This half-thickness is chosen based on the diagonal length of a square element to ensure that a whole element falls within half of the inelastic zone. When  $\delta = 4.0h$ , we observe the development of small-amplitude slip pulses in the form of reverberating fault zone waves within the nucleation patch. Later, after the rupture has successfully initiated, the velocity wavefield follows the expected overall behavior in line with the mesh-aligned configuration. At small values of  $\delta = 1.0h$ , the nucleation size is smaller, and we observe complete dissipation of the rupture front over time, leading to dying (unsustained) rupture. For higher values of  $\delta$ , the fault zone half-thickness relative to the element width (e.g.,  $\delta = 4.0h$ ), trapped waves develop within the fault zone, generated at high effective impedance contrasts. Constructively interfering fault zone waves later form a coherent rupture front, producing a complex wavefield in the interior of the fault zone and exciting high-frequency seismic radiation in visible in the velocity field in the vicinity of the nucleation patch in the fault normal direction (Figure 7, panels with  $\delta = 4h$ ).


The effects of different choices of  $\delta$  in our non-mesh-aligned numerical tests agree with previous findings (e.g., Gabriel et al., 2012; Galis et al., 2014; Huang et al., 2014): slight variations of the nucleation size, for a fixed prescribed overstress, can lead to unsuccessful initiation of the rupture process on the lower end of the parameter space allowing for self-sustained rupture, implying that the initiation is not sufficiently strong for supporting rupture to spontaneously propagate and develop into a self-sustained propagating rupture. In the overcritical limit, larger patches introduce changes in rupture dynam-

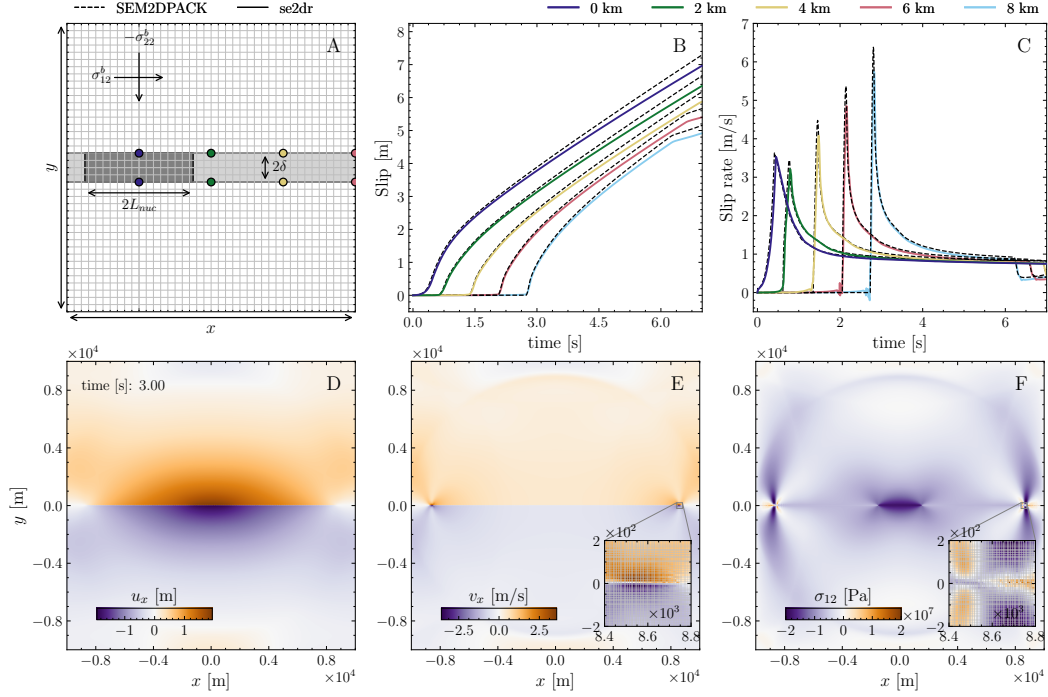

**Figure 5.** Phase-field stress glut model: Mesh-aligned TPV3. The mesh is composed of squared  $\mathcal{Q}_3$  elements and element width  $h = 25$  m. This model uses the interface-yielding criterion. The fault zone parameter  $\delta = h$ , and the system evolves for 7 s of simulation time. (A) Illustrates the model configuration, including the location of the nucleation within the fault zone and the receiver pairs at increasing along-strike distance from the hypocenter indicated by color. Next to it, the figure includes the (B) slip and (C) slip rate profiles compared against the reference solution profiles. The figure also includes the result's corresponding  $x$ -component snapshot at  $t=3$  s for the displacement (D), velocity (E), and shear stress (F).

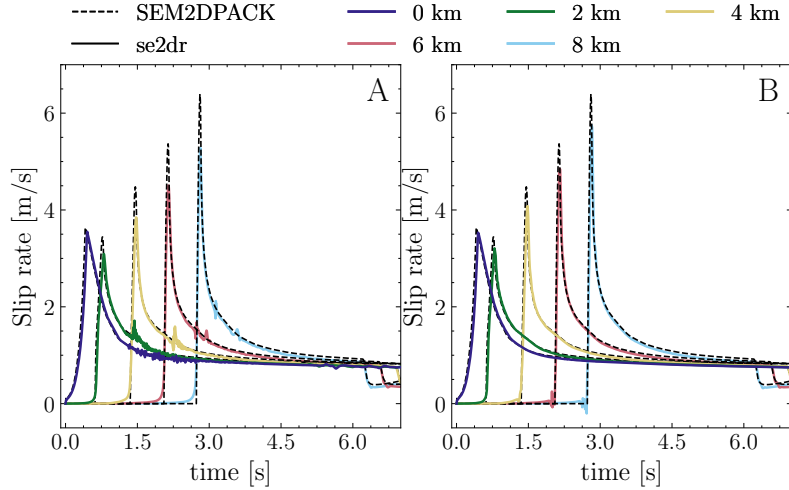

**Figure 6.** Comparison of the 2D TPV3 dynamic rupture solution yielding criteria, with square  $\mathcal{Q}_3$  elements of width  $h = 25$  m, and blending parameters as in Figure 5. (A) shows the simulation results at receiver pairs with increasing along-strike distance from the hypocenter indicated by color, using the volumetric yielding criterion, while (B) depicts the results using the interface yielding criterion.

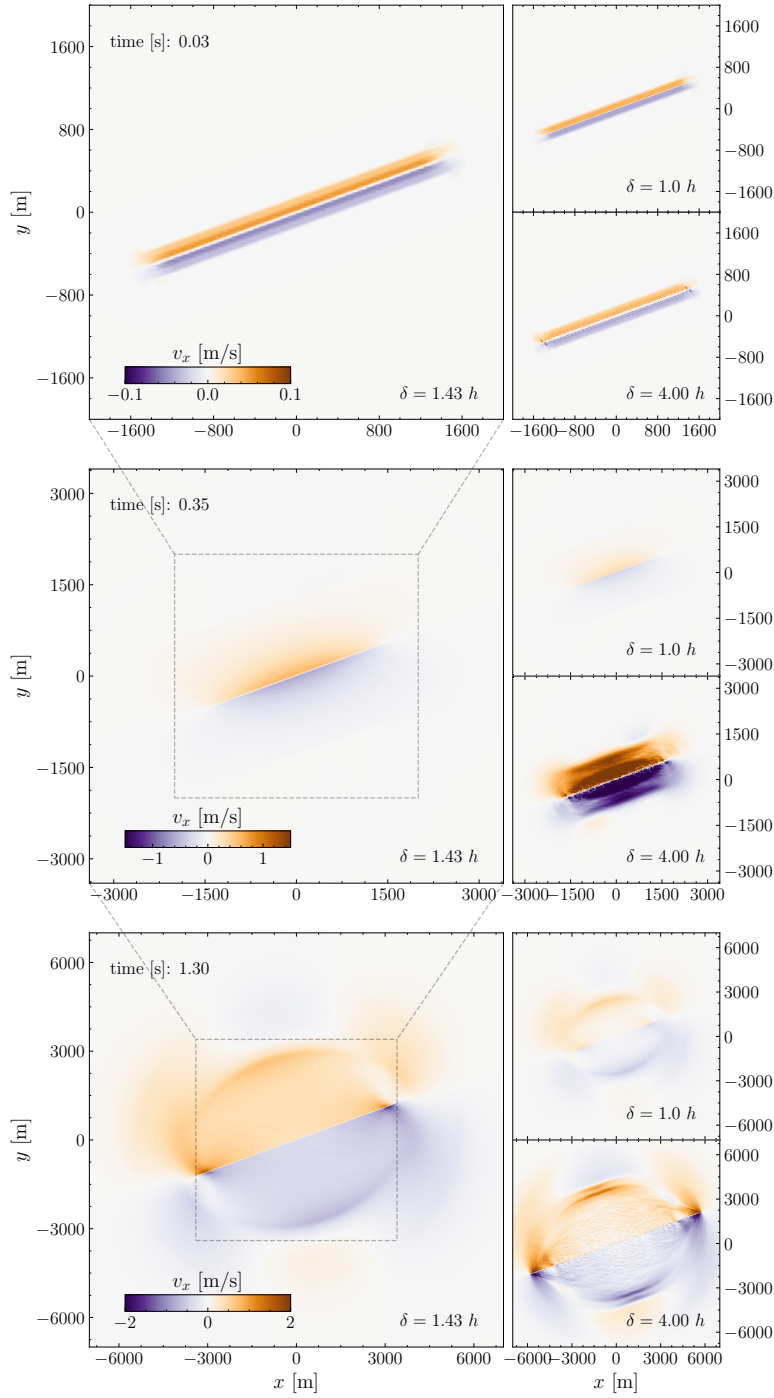

**Figure 7.** Phase-field stress glut model: Variation of the  $\delta$  parameter for tilted TPV3 simulations. The mesh is composed of square  $Q_3$  elements of width  $h = 25$  m. The figure includes three sets of frames per time step. Each frame set contains the  $x$ -component of the velocity field and showcases three values of the half inelastic zone parameter  $\delta$ ;  $h$ ,  $1.43h$ , and  $4h$ . The models here use the volumetric yielding criterion. Each figure subset depicts on the left column the expected qualitative behavior for the intermediate half inelastic zone thickness. On the right column, the subset illustrates two end-members of the  $\delta$  parameter variation: on the top, the dissipation of the rupture front, and below, the formation of small amplitude resonance in the velocity field within the nucleation zone.

ics including changes in rupture style and speed, such as super-shear transitions and higher slip-rate amplitudes.

### 4.3 Spectral properties of the modeled seismic wavefield

For the element choice in our mesh, the shear wave velocity assumed for the TPV3 model, and assuming several integration points per minimum frequency as  $\zeta_{min} = 30$  due to the relatively low polynomial order used, we can assess the upper cut-off frequency as approximately 13 Hz. We chose this value for  $\zeta_{min}$  from the suggested range of 10–30 for low ( $< 4$ ) element order after Seriani and Priolo (1994). For the mesh settings of the reference solution and an assumed  $\zeta_{min} = 10$ , the reference solution has an upper cut-off frequency of 20 Hz. With this information, we limit the upper band of the frequency spectra in Figure 8(D) to the cut-off frequency.

Rupture acceleration and deceleration generate high-frequency seismic wave radiation (Madariaga, 1977). For this reason, we expect a roughly flat signal in the spectra of the acceleration records for the kinematic model, where the rupture velocity is constant. The amplitude spectrum from receivers in the Kostrov kinematic model solution is shown in Appendix B. For the dynamic model, we extract the along-fault (A) and fault-normal (B) accelerograms in Figure 8 from receivers at different distances normal to the fault. The accelerogram spectral amplitudes of the dynamic model in Figure 8D at two receiver locations; both 6 km along the fault from the fault center, and respectively at a distance of 25 m and 500 m normal to the fault, are increasing until just above 1 Hz, with amplitudes systematically higher than the reference solution.


Discrete coseismic off-fault damage has been considered to enhance high-frequency radiation in acoustic recordings during stick-slip events (Hanks, 1982; Castro & Ben-Zion, 2013). Okubo et al. (2019) finds significant high-frequency radiation caused by secondary discrete fractures in simulations compared to the no-off-fault damage case. In our diffuse simulation using an interface-yielding criterion, we overall observe a similar trend as in the reference solution, with no significant shift towards the high frequencies. Analogous to the reference solution, the frequency content decays rapidly with the fault-normal distance, roughly reduced by one order of magnitude near the upper cut-off frequency. However, the fault-reactivation slip pulse (observed in Figure 5, using the volumetric yielding criterion) contributes to the higher frequency content, shifting the amplitude spectra upwards towards the upper cut-off frequency in comparison to the reference solution. This high-frequency contribution can be seen in Figure C3.

### 4.4 Resolution refinement analysis


A formal convergence analysis requires an analytical solution that is not available for our steady-state phase-field diffuse fault approach. Instead, we present refinement analysis by means of comparison to a high-resolution reference solution (Pelties et al., 2012; Wollherr et al., 2018) and illustrate convergence toward the reference solution under  $h$ - and  $p$ -refinement and variation of blending parameters.

We here choose a steady-state phase-field description of the diffuse transition from the yielded, inelastic region into the pure elastic media, which offers a flexible numerical approach for the mesh-independent representation of a discontinuity. The selection of the blending parameters influences the accuracy of our metrics of interest; the slip and slip rate, against the high-resolution reference solution. Steeper transitions lead to spurious oscillations behind the rupture front, a product of Gibbs phenomena, with strong signal amplitudes; while more smooth transitions lead to reduced signal amplitude. Our choice, although not optimized, is intended to balance the trade-offs of end-member choices in the blending parameter space. Future work may explore physic-based considerations to inform these choices.

The blending variables may be interpreted as additionally introduced degrees of freedom to fit against a reference solution; alternatively, they can be further constrained under phase-field theory and be considered a proxy for material damage. Variation of the blend-

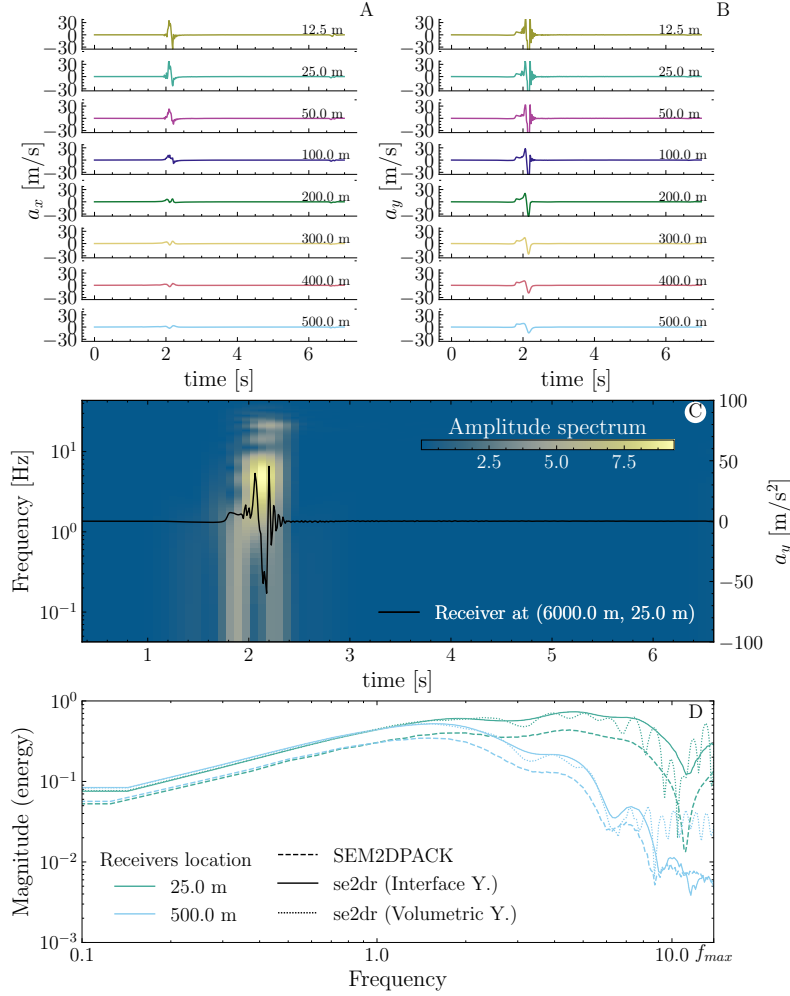

**Figure 8.** Phase-field stress glut model, TPV3 mesh-aligned model: Variation of the (A)  $x$ - and (B)  $y$ -components of synthetic accelerograms, at stations located at 6 km along the fault, and varying distances normal to the fault for the simulation in Figure 5. (C) Spectrogram extracted from the  $y$ -component of the acceleration from a receiver at the coordinates (6 km, 25 m). (D) Amplitude spectra of the fault-normal accelerograms at two receivers at 6 km along the fault and, 25 m and 500 m normal to the fault, simulated with se2dr (continuous and dotted lines for each yielding criterion used) and the split-node discrete fault approach in *SEM2DPACK* (dashed lines). All spectra are shown to the numerically resolved  $f_{max}=13$  Hz.

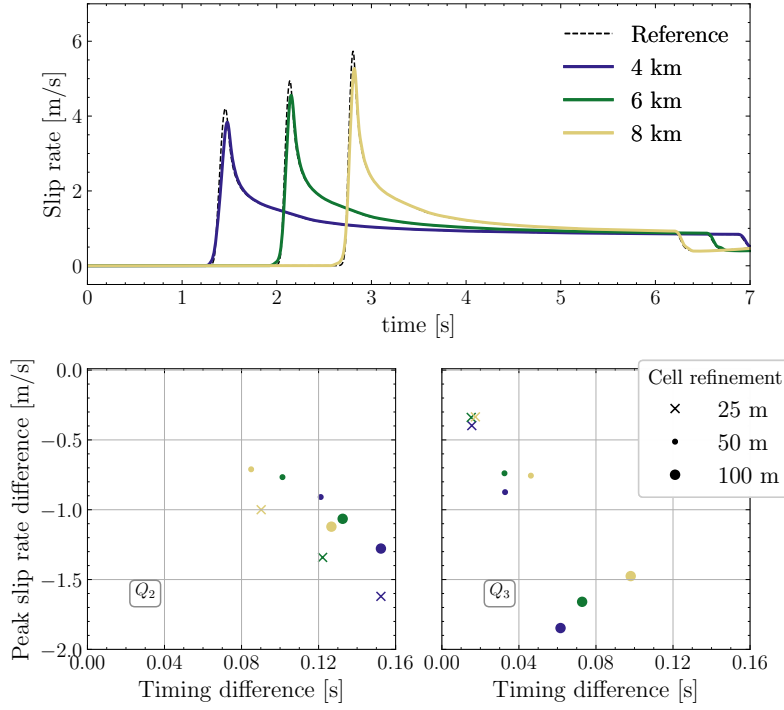

**Figure 9.** Filtered (Butterworth with  $f_c = 10$  Hz) slip rate profiles. The top row shows the simulation slip rate results to the TPV3 mesh-aligned model with alternative blending parameters  $A = 18/\delta$ ,  $\varphi_c = 0.65\delta$ . These results use  $Q_3$  elements with  $h = 25$  m and  $\delta = h$  and an interface-yielding criterion, color-coded by station location along the fault. The second row depicts the difference between the peak slip rate and timing between the reference and our simulation results from filtered slip rate profiles from three receivers at 4, 6 and 8 km along the fault. The scatter plots include such differences for the blended  $Q_2$  and  $Q_3$  elements in the simulations and various element sizes. The marker symbol depicts the cell refinement used in each simulation.

ing parameters influences the accuracy against a reference solution. Figure 9 (top row) shows the solution to the TPV3 benchmark problem by using a set of blending parameters  $A = 18/\delta$ ,  $\varphi_c = 0.65\delta$ , i.e. a steeper blending than in the result from Figure 5, also using the interface yielding criterion.

The results approach the reference solution, reflected in reduced differences in peak slip rate amplitude and timing. For this choice of blending parameters, we perform mesh refinement analysis and a variation of the simulation polynomial degree for the dynamic rupture TPV3 benchmark, which we compare against the well-defined high-resolution reference solution to the benchmark problem. We use a Butterworth filter with a cut-off frequency of 10 Hz for solutions with different  $h$ - and  $p$ -refinements and compare how the peak slip rate of our results differ from the reference in terms of amplitude and timing, as seen in Figure 9 (bottom row). We evaluate the differences for the receivers located at 4, 6, and 8 km along the fault.

Our results show systematically lower amplitudes for our  $\mathcal{Q}_3$ -element solutions. However, we also report on results when further increasing the resolution in the simulations.  $p$ -refinement leads to faster growth of the peak slip rate amplitude towards the reference and reduced timing differences for the different receivers along the fault. The systematic delay in timing gets reduced by cell refinement, which also affects the inelastic fault zone width. The amplitude of the peak slip rate depends on the discretization within the fault zone and the blending parameters used, as it describes the offset from the elastic stress response and its transition into the elastic media at the quadrature points within the subdomain. Also, using  $\mathcal{Q}_2$ -element fails to reproduce the asymptotic fall-off behind the peak slip rate arrival (Figure D7), denoting a requirement for higher spatial resolution.

Our method reproduces the reference solution at a relatively low polynomial refinement for a given phase-field distribution choice. Its accuracy is affected by the resolution of the yielding elements, implying that adaptive mesh refinement can be applied to the method for future optimization purposes. Higher polynomial orders can be tested after optimizing our implementation to establish that the method maintains the same numerical accuracy (convergence order) as the classical SEM.

## 5 Discussion

Dalguer and Day (2006) assessed the accuracy of the Traction at Split Node (TSN) method, the thick fault proposed by Madariaga et al. (1998), and the stress glut from Andrews (1976) in a staggered grid finite difference discretization. The explicit incorporation of discontinuous velocity nodes in the TSN method allows for a natural partition of the equations of motion at each side of the fault surface on which the split nodes are located. In this context, the stress glut and the thick fault methods require a fixed fault thickness with respect to the computational grid resolution. The stress glut method's fault zone width is two halves of contiguous elements, i.e. an inelastic zone of one grid step, with the fault center defined as the common border defining a plane of shear-stress grid points. The thick fault places the fault halfway between two shear-stress planes, and the fault zone thickness is two grid steps. Under these assumptions, the stress glut method reproduces well the qualitative features of the discrete fault reference solution but with quantitative deficiencies. It was reported that the rupture velocity remained systematically low. The thick fault reported a misfit in rupture time of 30% and higher, which then failed to match the rupture behavior of the reference solution qualitatively. One of the main conclusions of Dalguer and Day (2006) was that the formulation of the jump condition mainly controls the solution accuracy in finite-difference spontaneous rupture simulations.

In this work, we have modified the stress glut approach and have improved the solution accuracy by using a steady-state phase-field model enabling a smooth transition between the yield stress and the elastic shear stress. Our stress glut extension to the framework of SEM in the mesh-aligned configuration shows overall qualitative and quantitative agree-

ment with 2D benchmarks of kinematic and dynamic rupture problems when verified against a split-node SEM reference from Ampuero (2012). In general, the solutions show an expected systematic delay of the rupture front arrival (that is, slower rupture speed), depending on the prescribed half-thickness of the fault zone  $\delta$ , relative to the element dimensions. Introducing the diffuse interface description reduces fault zone spurious oscillations introduced by Gibbs phenomena due to the stress discontinuity from the imposed limiter on the stress. Similar to the typical employed visco-elastic Kelvin-Voigt damping in split-node SEM dynamic rupture modeling, and equivalent to introducing off-fault plasticity or damage (Andrews, 2005; Day et al., 2005; Gabriel et al., 2013; Xu et al., 2015), our diffuse fault zone introduces reduction of amplitude in both slip and slip rate metrics as well as in rupture speed. A higher  $p$ -refinement level combined with  $h$ -refinement, and our proposed blending function (e.g. Figure 5), approach the reference solution in the mesh-aligned case, with reduced spurious oscillations behind the rupture front.

### 5.1 Physical interpretation of the stress field of a diffuse fault

Andrews (1999) pointed out that the embedding of a crack through the stress glut formulation affects the neighboring stress in an irregular way that can be compared to the Eshelby inclusion problem (Eshelby & Peierls, 1957). The complexity of the stress field incurred by such anelastic ‘inclusions’ increases when it interacts with the evolving stress field around the dynamically propagating rupture and may prevent locations within the fault zone from reaching the yielding surface at a specific time.

This increased complexity in the stress field directly affects our dynamic rupture results, as before the onset of yielding and development of the fully spontaneous rupture front, distributed shear stress locally shadows the fault zone regions at the vicinity of the transition between the nucleation patch and the rest of the fault zone. The incipient rupture develops asymmetrical dynamic normal stress evolution, which leads to fault-oblique yielding within the fault zone. Note that this oblique geometry characterizes shear-driven deformation between two surfaces undergoing relative motion at each side of the embedded fault zone. This phenomenon at the vicinity of the boundary between the prescribed nucleation patch and the remainder of the prescribed fault zone alters the timing of the onset of rupture at locations neighboring the nucleation patch when using a volumetric yielding criterion in mesh-aligned numerical simulations. These temporally ‘dynamically locked’ patches are later reactivated by evolving stresses in their vicinity, producing a measurable, small-amplitude propagating secondary slip-pulse. We note that the TPV3 model setup includes a challenging characteristic, as it contains a sharp transition between the nucleation asperity and the rest of the fault (Galis et al., 2014); however, we also observe dynamically impacted fault zone yielding in alternative descriptions of the nucleation patch (see in Appendix C, Figure C2).

We designed the interface yielding criterion as defined in Eq. (4) to suppress the observed tendency for fault-oblique yielding at asperities within the fault zone. As further discussed in Appendix C, this alternative yielding criterion implies the yielding of all regions behind a fully spontaneous fault zone rupture front. It is a justifiable assumption applied to our diffuse fault when our goal is to merely emulate the results from planar, discrete fault representations. However, for thicker fault zones the interface yielding assumption introduces perturbations on the stress field within the fault zone, especially at the vicinity of the rupture front, which in turn introduce spurious oscillations of the shear stress component propagating in fault-strike direction (as we show in kinematic and dynamic rupture simulations).

### 5.2 Mesh independence

Our steady-state phase-field approach does not require the mesh to be designed to align with a pre-existing fault. We show that kinematic and dynamic rupture can evolve independently of the spectral element boundaries. Results obtained with the mesh-aligned relative to the dynamic rupture problem lead to a close match with the reference solu-



tion. Non-aligned mesh configurations using  $\mathcal{Q}_3$  elements show a general amplitude reduction in the slip and slip rate metrics and grow closer to the reference solution –as the mesh-aligned case– when increasing the fault zone width. Alternatively, the non-aligned mesh solutions require an increased spatial resolution of the diffuse fault zone to reach the same level of agreement with the fault-interface reference solution as in the mesh-aligned case. This effect becomes especially apparent for the spontaneous dynamic rupture models, where a low integration point density of the elements constituting the nucleation patch may prevent self-sustained spontaneously propagating rupture due to the sensitivity of dynamic rupture to nucleation size, shape and procedure (e.g., Festa & Vilotte, 2006; Shi et al., 2008; Lu et al., 2009; Bizzarri, 2010; Gabriel et al., 2012, 2013; Galis et al., 2014). Alternative nucleation strategies that are smooth in space and/or time can reduce numerical artifacts in spontaneous dynamic rupture problems such as stress localization in the surroundings of a sharply defined nucleation patch. Such smooth approaches also minimize the influence of a potentially ill-constrained nucleation procedure on the subsequent stages of realistic earthquake scenario simulations (e.g., Harris et al., 2021; Biemiller et al., 2022). We observe comparable numerical artifacts, apparent especially in the stress fields, at quadrature points of element cells located only partially within the diffuse fault zone, e.g., in the mesh-independent fault configurations using low polynomial order (see Figures 4, 7, C3). Increasing fault zone width can mitigate this issue, however, at the same time too high nucleation overstresses should be avoided.

### 5.3 Alternative smeared crack models

Smeared crack models have been applied within the framework of finite element methods to model the fracture mechanics of mode I, II, and mixed-mode cracks in concrete. Thereby the so-called “*stress locking*” (Rots, 1988; Rots & Blaauwendraad, 1989) phenomenon refers to spurious stress build-up around the cracking elements, which may pollute the numerical results and lead to an overestimated energy dissipation and non-zero residual strength of a cracked structure. The cause of this spurious stress transfer has been related to a poor kinematic representation of the discontinuous displacement field in the vicinity of the macroscopic crack (Jirásek & Zimmermann, 1998b, 1998a). Unless the direction of the macroscopic crack (represented by a band of cracking elements) is parallel to the edges of finite elements, the directions of maximum principal strain determined from the finite element interpolation at individual integration points of the element deviate from the normal to the crack band. The principal lateral stress has a non-zero projection on the crack-band normal, generating spurious cohesive forces. However, higher-order elements offer better kinematic flexibility, such that they can partially relax the spurious stresses by adjusting the interpolated displacement field. Jirásek and Zimmermann (2001a, 2001b) deals with stress locking and instability via a varying scalar damage parameter as a function of the crack deformation of a mixed-mode embedded crack.

The diffuse thick fault approach presented here keeps the crack width fixed throughout the simulation time, which may perturb the stress component at elements crossing the fault interface. This argues in favor of considering non-local approaches in the future or extending our approach into a non-steady-state phase-field method. We may also choose a functional based on a non-local plasticity formulation describing the transition from the inelastic to the pure elastic domain within our fault-local compact support as an alternative to our blending approach. This treatment may be approached by defining the yielding condition and metrics in an average sense, which offers an alternative treatment to the stress localizations described in Section 5.1. Future work may explore the physical constraints to inform the blending parameters that mathematically define our diffuse fault model.

Recently, Fei and Choo (2019, 2020, 2021) have described phase-field models of geological motivated rock fracture that incorporate pressure dependence and frictional contacts for mode I, II, and mixed crack modes. Their approach is formulated as a set of governing equations for different contact conditions in the finite element method framework where

frictional energy dissipation emerges in the crack driving force during slip. Their method is proposed to allow arbitrary interface geometry representation without an explicit function or enriched basis, an advantage of phase-field methods. It can also accommodate contact constraints without a dedicated algorithm. Their approach involves ensuring that the stress tensor component in the nonslip directions is compatible between the interface and bulk regions. This results in modifying the separation between the volumetric-deviatoric stress decomposition approach as proposed by Amor et al. (2009). Our formulation of the modified stress tensor in Eq. (5) resembles theirs for a prescribed shape of stationary crack interface for the phase evolution equation. Our blending function and signed distance function variables play an equivalent role to the degradation function on their phase-field variable. After modifying the stress in their approach, they use Newton’s method to solve the discretized momentum balance equation, and the nodal increment in displacement requires explicitly solving for an updated stiffness tensor to calculate the element-wise Jacobian at the end of each time step. In this context, the crack driving force is calculated from the change of the plastic strain and used to calculate the updated phase-field variable.

A diffuse description motivated by steady-state phase-field profiles allows us to explore the yielding surface’s transition into elastic media as a distribution across the fault representation while keeping its logical simplicity in the formulation. This allows the method to be ported into alternative numerical frameworks. Development of our representation into the framework of phase-field requires critical ingredients of the phase-field formulation (based on the theory of fractures of Griffith and Taylor (1921)), such as introducing a phase-field evolution equation and the incorporation of a critical fracture energy which translates into the regularized continuum gradient damage mechanics (Miehe et al., 2015). This increases the complexity in its formulation and introduces parameters to solve for. However, the evolution of the phase-field, and thus the fault-normal growth at different distances along the embedded inclusion of the yielding surface, is pertinent to natural observations. Fault lateral growth is observed in nature as changes in the structural fault complexity along the propagation direction of the parent fault (Perrin et al., 2016). Such variation may avoid accumulating localized stress components throughout time at the inter-element boundary within the numerical grid. In addition, such a hypothetical spectral-element-based phase-field method would avoid explicitly calculating an updated stiffness tensor at the end of each time step.

In contrast to our diffuse fault representation with constant blending and respective parameters, alternative diffuse fault models incorporating increased thermomechanical complexities have been developed. A contemporaneous diffuse crack representation incorporating finite strain nonlinear material behavior and multi-physics coupling into dynamic earthquake rupture modeling is described by Gabriel et al. (2021) using the GPR model (Resnyansky et al., 2003; Romenskii, 2007). The model uses a first-order hyperbolic model of inelasticity coupled to finite strain elasto-visco-plasticity of continuum mechanics (Tavelli et al., 2020) and is extended for dynamic rupture using a high-order Discontinuous Galerkin scheme and the ExaHype PDE engine (Reinarz et al., 2020). Their model also permits the representation of arbitrarily complex geometries via a diffuse interface approach. In neither of their two scalar fields, the local material damage describing the fault geometry and secondary cracks and the solid volume fraction function need to be mesh-aligned, allowing thus faults and cracks with complex topology and the use of adaptive Cartesian meshes (AMR). However, the problem of parameter selection for their unified model of continuum mechanics is a non-trivial task due to the large amounts of parameters and may require numerical optimization algorithms applied to data obtained from observations and laboratory experiments. Our method also requires locally high resolution to describe the diffuse fault zone and would benefit from the future implementation of fault zone AMR, building upon previous implementations of SEM with AMR (e.g., Rudi et al., 2015, 2017; Tanarro et al., 2020).


## 5.4 Outlook

Here, we explore simple 2D benchmarks for kinematic and spontaneous dynamic earthquake rupture, including geometrical complexities on a structured mesh. The next step can involve exploring the method’s potential for modeling branching and crossing faults. Fault intersections and dynamic fault interactions alter the spatial distribution of stress concentrations (e.g., Gabriel et al., 2023) as well as influence the earthquake energy budget (e.g., Okubo et al., 2019), thus, directly affect earthquake rupture dynamics. Future extension of our approach to 3D is essential for direct observational constraints and verification studying real earthquakes. 3D unit elements are well established in spectral element methods applied to seismic wave propagation (e.g., Komatitsch & Tromp, 1999) and rupture dynamics (Galvez et al., 2014) and Andrews (1999) demonstrates the feasibility of strategies to evaluate the slip and slip rate from the shear traction components in 3D calculations. Thus, we expect that modifying our approach via a diffuse description of the stress glut should readily be extendable to 3D.

Applications of our method may help to further our understanding of fault zone evolution and the effects of internal rheology distribution at coseismic time scales. SEM is a volumetric method which allows to account for variable material parameters and mesh independence in principle allows to use the method to model time-evolving fault geometries, e.g., to capture the coupling between different physical mechanisms on-fault and within the bulk and evaluate their relative importance for rupture dynamics.

## 6 Conclusion

In this work, we present a novel steady-state phase-field model for rupture dynamics that extends the stress glut approach (Andrews, 1999). Using the high-order accurate and geometrically flexible framework of spectral elements, our diffuse fault zone formulation results in comparable kinematic and dynamic rupture propagation to the conventional planar traction at split node spectral element method for dynamic rupture simulations. Our approach supports a general description of the evolution of the effective friction coefficient, which dictates fault yielding and sliding as a function of time, location, slip, slip rate, and potential additional variables. To verify our approach, we first compare mesh-aligned kinematic and dynamic rupture model solutions. Our stress glut spectral element implementation aligns well with the discrete fault split-node spectral element reference solutions. Moving beyond the conventional planar interface, we introduce a diffuse fault zone description. This novel representation condenses fault volumetric complexities into a distribution within a compact support. This diffuse fault description follows a prescribed blending function that characterizes the transition from the inelastic state of the embedded crack to the pure elastic state of the surrounding rock matrix. Our model demonstrates its versatility using mesh-independent planar and curved fault geometries, simplifying the often tedious task of mesh generation. Importantly, our steady-state phase-field formulation is not restricted to spectral element methods: Our diffuse description of the fault zone is independent of the type of spatial discretization, conserving the original logical simplicity of the stress glut approach. This offers potential extensions to existing seismic wave propagation codes, facilitating more realistic dynamic rupture simulations. Distinct differences emerge in the stress and velocity fields generated by our fault representation compared to planar interface reference solutions. The resulting dynamic stress complexity interacts with the volumetric friction law, leading to dynamic fault reactivation and co-seismic, fault-oblique yielding patterns within the fault zone, depending on the chosen yielding criteria. These differences alter rupture front dynamics and seismic wave radiation, unveiling additional earthquake source complexities potentially overlooked in classical approaches. We conclude that a diffuse fault representation may offer a closer approximation to the complex physics of earthquakes while providing greater modeling flexibility. Our study opens new possibilities for phase-field-based modeling in earthquake physics.

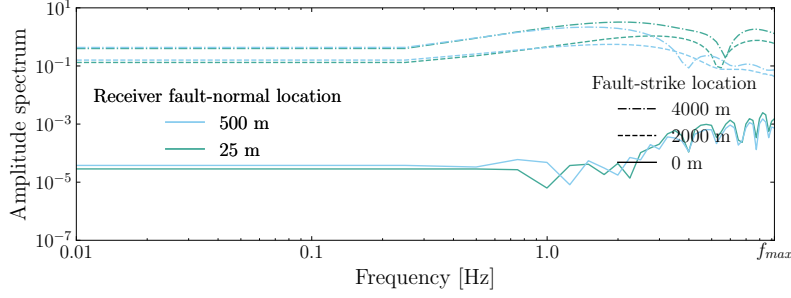

**Figure B1.** Amplitude spectra of the accelerograms for receivers located at 0, 2, and 4 km along fault strike, and 25, and 500 m in a fault-normal direction. Extracted for the Kostrov mesh-aligned model, using  $\mathcal{Q}_3$  square elements of 25 m width, depicted in Figure 2.

## Appendix A On the effective stiffness tensor

The effective stiffness tensor within the fault zone at a yielded location is found implicitly in Eq. (5),

$$\begin{aligned} \overline{\overline{\mathbf{C}}}_{\text{eff}} := & \overline{\overline{\mathbf{C}}} + \phi(\varphi) (-\text{sgn}(\tau)\mu[\lambda(\mathbf{n} \otimes \mathbf{t} + \mathbf{t} \otimes \mathbf{n}) \otimes \mathbf{1} + \\ & 2G(\mathbf{n} \otimes \mathbf{t} + \mathbf{t} \otimes \mathbf{n}) \otimes (\mathbf{n} \otimes \mathbf{n})] + \\ & G(\mathbf{n} \otimes \mathbf{t} + \mathbf{t} \otimes \mathbf{n}) \otimes (\mathbf{n} \otimes \mathbf{t} + \mathbf{t} \otimes \mathbf{n}). \end{aligned} \quad (\text{A1})$$


Note that this expression is the same as Eqs. (30)-(32) from the phase-field method of (Fei & Choo, 2019). There it is required to assemble the Jacobian matrix at the end of the stress update scheme within a FEM framework. As an advantage of using a SEM framework, we avoid explicitly calculating this stiffness tensor at the end of each time step.

## Appendix B Frequency results of the Kostrov kinematic model

As mentioned in Section 4.3, we analyse the frequency content of fault normal accelerograms at receivers located at different distances normal and along the fault, shown in Figure B1. The simulation setting is the same Kostrov kinematic model used in Figure 2. Given the prescribed shear velocity used in the Kostrov model, the cut-off frequency of our choice of model parameters is 9 Hz. Tests with the volumetric yielding criterion deliver roughly flat amplitude spectra of the accelerograms for receivers at 0 km along fault-strike. In the case of using the interface yielding (Figure B1), receivers close to the fault nucleation contain an increased frequency contribution above 2 Hz. Such frequency contribution can be explained due to the sharp reduction of the overshoot before the peak slip rate that takes place after using the interface yielding criterion. Regarding receiver pairs at 2 km and 4 km along fault strike (away from the nucleation patch), receivers at 0.5 km normal to the fault show a downward shift at frequencies above 1 Hz, deviating from the spectrum from receivers closer to the fault. This situation is observed for both yielding criteria.

## Appendix C On the yielding criterion applied to the rupture model

Our setup applied to the kinematic Kostrov crack produces slight differences between the model with the interface yielding criterion and the model with the volumetric yielding criterion. In a mesh-aligned geometrical configuration, the main difference is a smooth overshoot slip rate prior to the peak slip rate arrival, as seen in Figure C1(A), for the volumetric criterion, while the interface criterion rather contains a sudden reduction at this position. In the mesh unfitted geometrical configuration (Figure C1(A)), using the interface criterion with a thick fault geometry introduces numerical oscillations to the trailing signal behind the rupture front. As indicated in Section 5.1, our setup applied

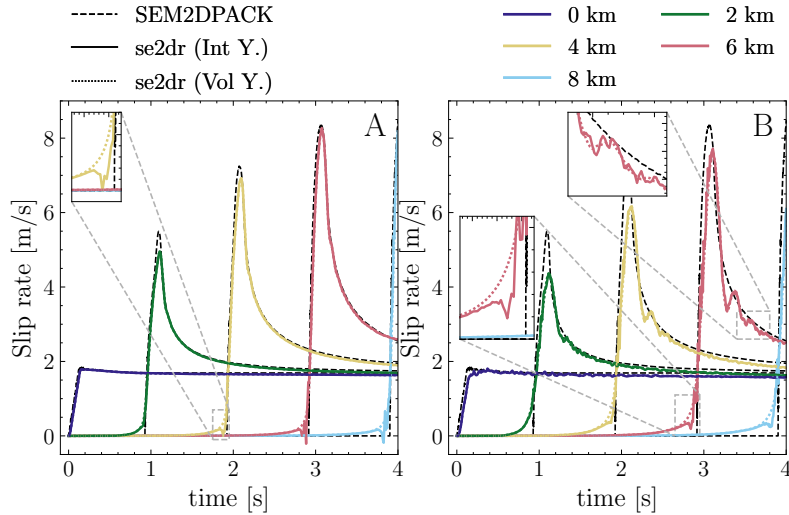


**Figure C1.** Comparison of the 2D Kostrov crack solution yielding criteria. The figure contains (A) the mesh-aligned setup shown in Figure 2 with  $\delta = h$  using the volumetric yielding criterion (dotted colored lines) and the interface yielding (continuous colored lines). The same comparison for both yielding criterion is shown for (B) the tilted setup shown in Figure 3 with  $\delta = 2.5h$ .

to the TPV3 model generates a fault-oblique yielding which, in the transition between the nucleation and the rest of the fault zone, leaves an unyielded location within the fault zone, behind the rupture front. As the simulation progresses, this location reaches the yielding surface due to the evolution of the stress field, producing a small pulse in the slip rate profile when using the volumetric yielding criterion, while introducing the interface yielding produces a solution closer to the reference, free of secondary pulses, as seen in Figure 6. Taking a look into the stress field, the shear stress centered around the transition between the nucleation and the rest of the fault zone for the same model configuration under a reduced element width  $h = 50$  m is depicted in Figure C2(A) for the volumetric yielding criterion. We extract a transect crossing such unyielded location and sample the shear and fault normal stresses, shown in Figure C2(B). The same is done for a simulation that uses the interface yielding, for the figures C2C and C2(D). Note the asymmetry of the shear stress profile in Figure C2(B), with positive values of the differential shear stress due to the unyielded location, while Figure C2(C) shows the state of such stresses, and no unyielded location is left behind the developed fully propagating rupture, which advances past this point. Note as well that the solution using the volumetric criterion delivers a smooth stress field within the fault zone outside the nucleation patch, while the interface yielding solution generates a slight oscillatory perturbation. For this reason, we consider the interface yielding criterion a gateway to emulate planar interface solutions.


The small pulse in the slip rate profile decays fast with distance normal to the fault as observed in Figure C3(A,B) and contributes to high frequency signal as observed in the spectrogram in Figure C3(C), producing a high frequency content in the amplitude spectrum towards the cut-off frequency.

## Appendix D On the refinement tests for each model and configuration


In this supplementary section we include h-refinement tests for our adopted models Kostrov, and TPV3. For the Kostrov model we include the horizontal (Figure D1), tilted  $20^\circ$  (Figure

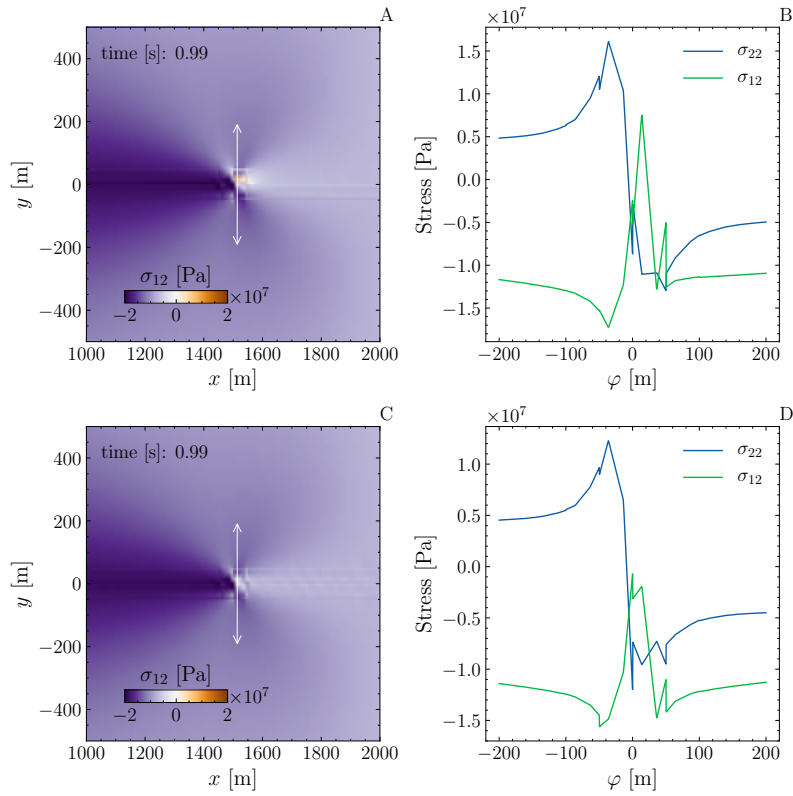

**Figure C2.** Comparison of the 2D TPV3 dynamic rupture solution. The mesh is composed of  $\mathcal{Q}_3$  square elements of width  $h = 50$  m. The solutions shown here use the volumetric yielding (top row), and the interface yielding (bottom row). The blending parameters and the ratio between the fault inelastic zone width relative to the element width is the same as in the results from Figure 5. (A) depicts the shear stress field zoomed at the transition between the nucleation and the rest of the fault zone. Superposed is the location of the transect extracted in (B), sampling the fault normal and shearing components of the stress field. The center of the transect is located at (1513.8 m, 0 m) so that it crosses the location left unyielded at the time, behind the rupture front. Likewise, (C) and (D) show the shear stress field and the transect, respectively.

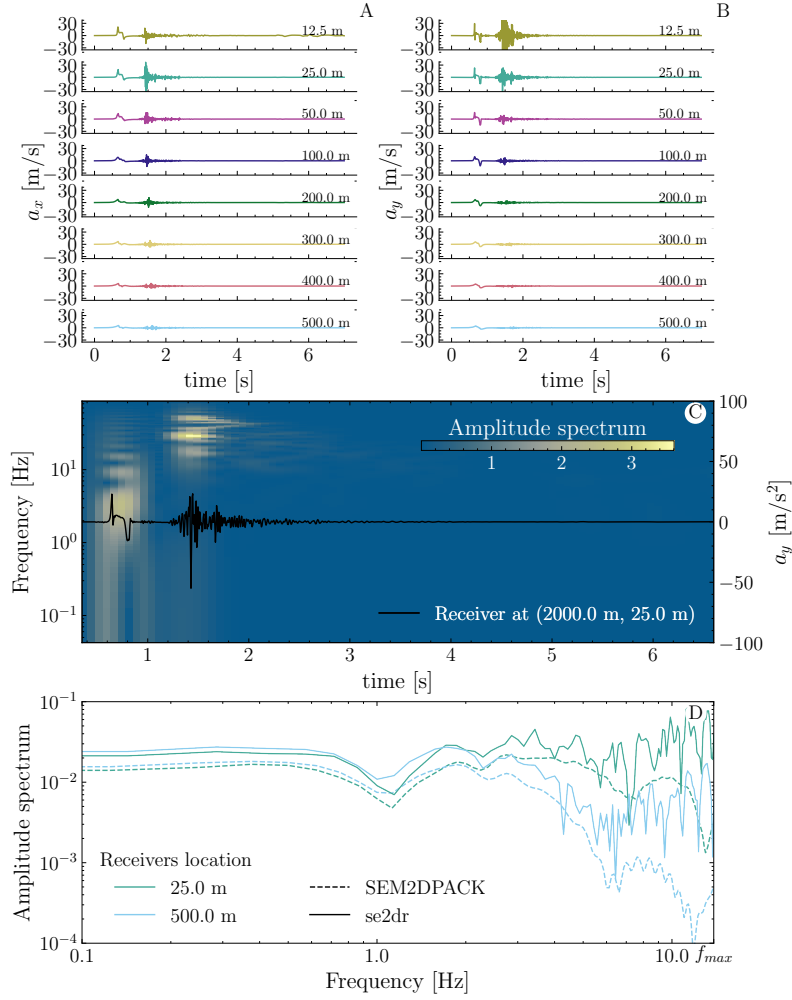

**Figure C3.** Phase-field stress glut model, TPV3 mesh-aligned model: Variation of the (A)  $x$ - and (B)  $y$ -components of synthetic accelerograms, at stations located at 2 km along the fault, and varying distances normal to the fault for the simulation in Figure 6 employing the volumetric yielding criterion. (C) Spectrogram extracted from the  $y$ -component of the acceleration from a receiver at the coordinates (2 km, 25 m). (D) Amplitude spectra of the fault-normal accelerograms at two receivers at 2 km along the fault and, 25 m and 500 m normal to the fault, simulated with *se2dr* (continuous lines) and the split-node discrete fault approach in *SEM2DPACK* (dashed).

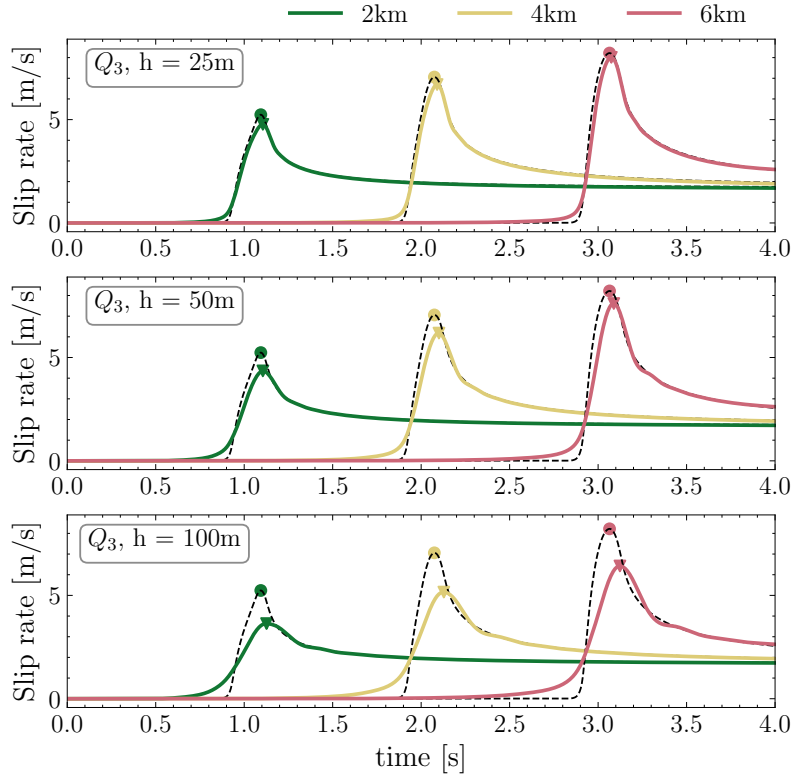

**Figure D1.** h-refinement test for Kostrov's model in the horizontal geometrical configuration. The models depicted use  $Q_3$  elements with element width  $h=25,50$ , and  $100\text{m}$ , and  $\delta = h$ . We impose a volumetric yielding criterion within the fault zone.

D2), and sigmoid (Figure (Figure D3)) configurations. For the TPV3 model we, in addition to what has been presented in the main text, include h-refinements for the tilted  $20^\circ$  (Figure D4) configuration. We also include additional slip rate profiles including more receivers along the fault for the horizontal (Figure D5), and tilted  $20^\circ$  (Figure D6). For completeness, we include the slip rate profiles up to 3 s, of the h-refinement using  $Q_2$  elements, which is used for the lower left inset of Figure 9.

### Acknowledgments


This work was supported by the European Research Council (ERC) under the European Union's Horizon 2020 research and innovation programme (TEAR, Grant agreement No. 852992).

The authors acknowledge additional support from ChEESE (ERC Grant No. 823844), the National Science Foundation (NSF Grant No. EAR-2121666), and the Southern California Earthquake Center (SCEC Grant No. 21112). Computing resources were provided by the Institute of Geophysics of LMU Munich (Oeser et al., 2006). We thank Jean-Paul Ampuero for openly providing *SEM2DPACK* and Duo Li for helpful discussions.


### Data availability

The code *se2dr* is openly available online as a branch of *se2wave* at the repository <https://bitbucket.org/dmay/se2wave>. Instructions to run and reproduce our tests can be found under the following link <https://syncandshare.lrz.de/getlink/fi3vdMk2s6rPc7TS1qxyRa/> ZenodoData and will be available in a Zenodo repository after acceptance.




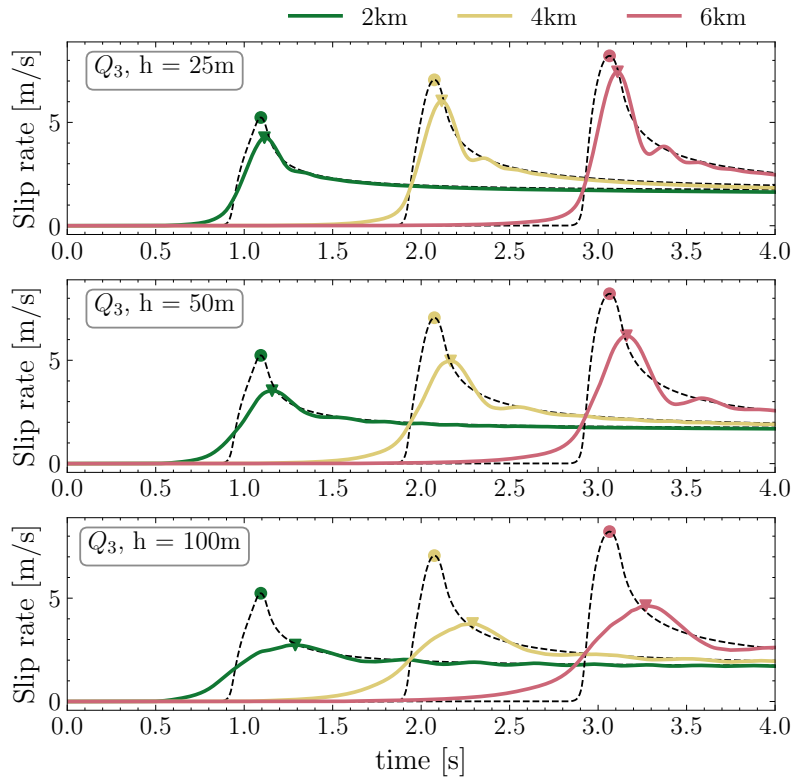


**Figure D2.**  $h$ -refinement test for Kostrov's model in the tilted ( $20^\circ$ ) geometrical configuration. The models depicted use  $Q_3$  elements with element width  $h=25, 50$ , and  $100\text{m}$ , and  $\delta = 2.5h$ . We impose a volumetric yielding criterion within the fault zone.

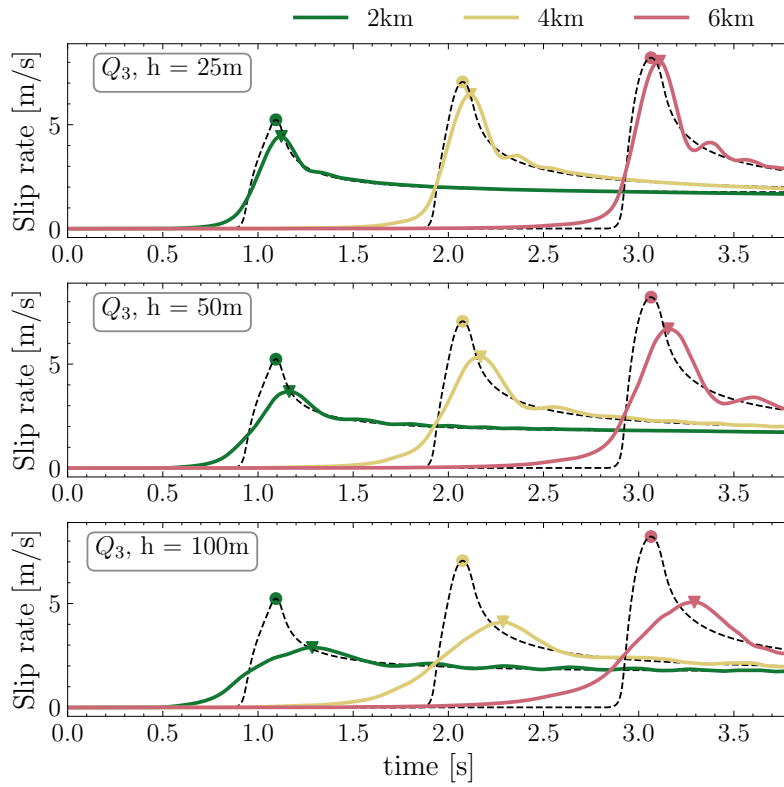


**Figure D3.**  $h$ -refinement test for Kostrov's model in the sigmoid geometrical configuration. The models depicted use  $Q_3$  elements with element width  $h=25, 50,$  and  $100\text{m}$ , and  $\delta = 2.5h$ . We impose a volumetric yielding criterion within the fault zone.

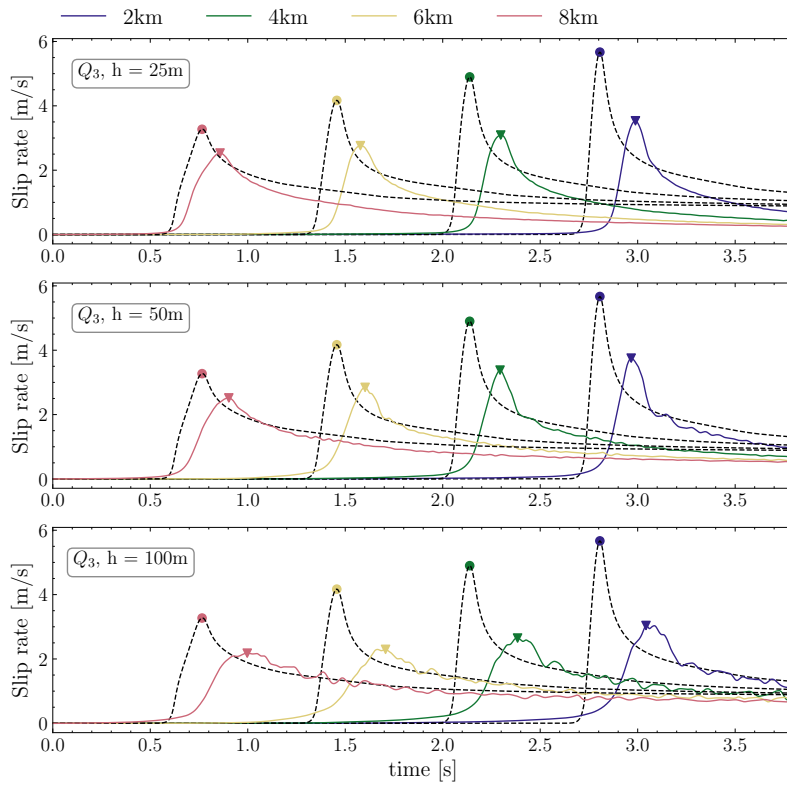


**Figure D4.** h-refinement test for TPV3 model in the tilted ( $20^\circ$ ) geometrical configuration. The models depicted use  $Q_3$  elements with element width  $h=25, 50,$  and  $100\text{m}$ , and  $\delta = 1.43h$ . We impose a volumetric yielding criterion within the fault zone.

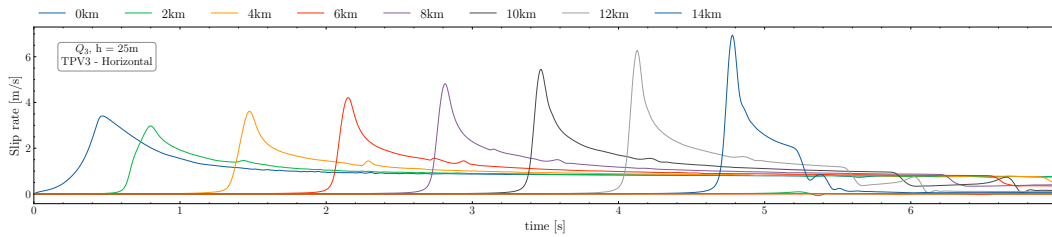

**Figure D5.** Horizontal configuration of TPV3 model, simulation using  $Q_3$  elements with element width of  $h=25\text{m}$ , and  $\delta = h$ , through 7s of simulation time. Using volumetric yielding criteria. The profiles include additional receiver locations along the fault geometry, every 2km from the nucleation up to 14km.

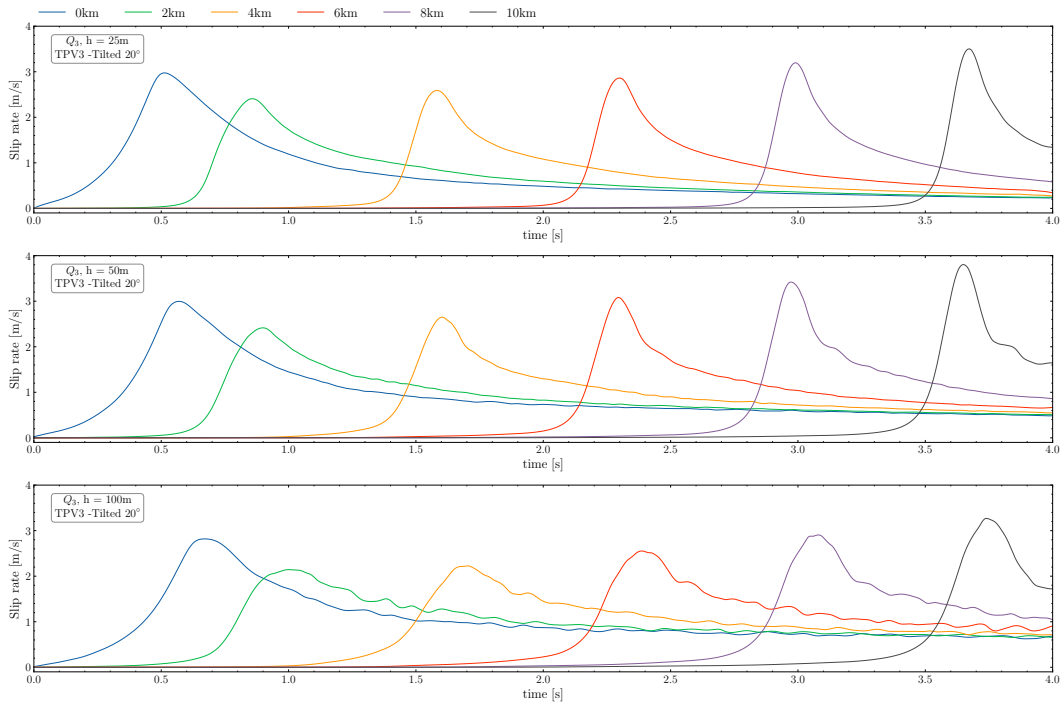

**Figure D6.** Tilted ( $20^\circ$ ) configuration of TPV3 model, simulation using  $Q_3$  elements with element width of  $h=25, 50,$  and  $100\text{m}$ , and  $\delta = 1.43h$ , through  $4\text{s}$  of simulation time. Using volumetric yielding criteria. The profiles include additional receiver locations along the fault geometry, every  $2\text{km}$  from the nucleation up to  $10\text{km}$ .

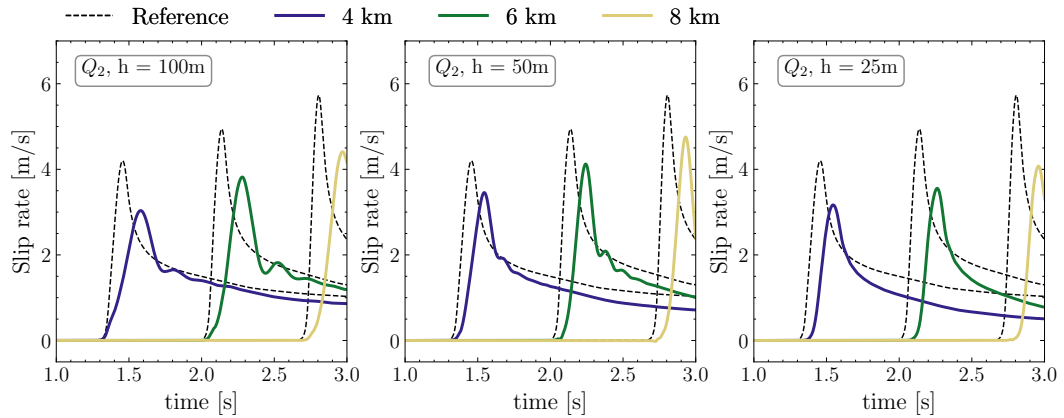

**Figure D7.** Filtered (Butterworth with  $f_c = 10\text{Hz}$ ) slip rate profiles for results using  $Q_2$  elements and alternative blending parameters  $A = 18/\delta$ ,  $\varphi_c = 0.65\delta$ , following the parameter choices for the lower left inset of Figure 9.

## References

- Abhyankar, S., Brown, J., Constantinescu, E. M., Ghosh, D., Smith, B. F., & Zhang, H. (2018). PETSc/TS: A Modern Scalable ODE/DAE Solver Library. *arXiv preprint arXiv:1806.01437*.
- Amor, H., Marigo, J.-J., & Maurini, C. (2009). Regularized formulation of the variational brittle fracture with unilateral contact: Numerical experiments. *Journal of the Mechanics and Physics of Solids*, 57(8), 1209-1229. doi: 10.1016/j.jmps.2009.04.011
- Ampuero, J.-P. (2012). SEM2DPACK: A Spectral Element Method tool for 2D wave propagation and earthquake source dynamics User's Guide [Computer software manual]. Retrieved from <https://github.com/jpampuero/sem2dpack>
- Andrews, D. J. (1976). Rupture propagation with finite stress in antiplane strain. *Journal of Geophysical Research (1896-1977)*, 81(20), 3575-3582. doi: 10.1029/JB081i020p03575
- Andrews, D. J. (1999). Test of two methods for faulting on finite-difference calculations. *Bulletin of the Seismological Society of America*, 89(4), 931-937. doi: 10.1785/BSSA0890040931
- Andrews, D. J. (2005). Rupture dynamics with energy loss outside the slip zone. *Journal of Geophysical Research: Solid Earth*, 110(B01307). doi: 10.1029/2004JB003191
- Backus, G., & Mulcahy, M. (1976). Moment tensors and other phenomenological descriptions of seismic sources—I. Continuous displacements. *Geophysical Journal International*, 46(2), 341-361. doi: 10.1111/j.1365-246X.1976.tb04162.x
- Balay, S., Abhyankar, S., Adams, M. F., Brown, J., Brune, P., Buschelman, K., ... Zhang, H. (2019). *PETSc Web page*. <https://www.mcs.anl.gov/petsc>. Retrieved from <https://www.mcs.anl.gov/petsc>
- Balay, S., Abhyankar, S., Adams, M. F., Brown, J., Brune, P., Buschelman, K., ... Zhang, H. (2020). *PETSc users manual* (Tech. Rep. No. ANL-95/11 - Revision 3.14). Argonne National Laboratory. Retrieved from <https://www.mcs.anl.gov/petsc>
- Balay, S., Gropp, W. D., McInnes, L. C., & Smith, B. F. (1997). Efficient management of parallelism in object oriented numerical software libraries. In E. Arge, A. M. Bruaset, & H. P. Langtangen (Eds.), *Modern software tools in scientific computing* (pp. 163-202). Birkhäuser Press.
- Beckermann, C., Diepers, H.-J., Steinbach, I., Karma, A., & Tong, X. (1999). Modeling melt convection in phase-field simulations of solidification. *Journal of Computational Physics*, 154(2), 468-496. doi: 10.1006/jcph.1999.6323
- Benjemaa, M., Glinsky-Olivier, N., Cruz-Atienza, V. M., Virieux, J., & Piperno, S. (2007). Dynamic non-planar crack rupture by a finite volume method. *Geophysical Journal International*, 171(1), 271-285. doi: 10.1111/j.1365-246X.2006.03500.x
- Ben-Zion, Y., & Shi, Z. (2005). Dynamic rupture on a material interface with spontaneous generation of plastic strain in the bulk. *Earth and Planetary Science Letters*, 236(1), 486-496. doi: 10.1016/j.epsl.2005.03.025
- Beroza, G. C., & Spudich, P. (1988). Linearized inversion for fault rupture behavior: Application to the 1984 Morgan Hill, California, earthquake. *Journal of Geophysical Research: Solid Earth*, 93(B6), 6275-6296. doi: 10.1029/JB093iB06p06275
- Biemiller, J., Gabriel, A.-A., & Ulrich, T. (2022). The dynamics of unlikely slip: 3d modeling of low-angle normal fault rupture at the mai'iu fault, papua new guinea. *Geochemistry, Geophysics, Geosystems*, 23(5), e2021GC010298. doi: 10.1029/2021GC010298
- Bizzarri, A. (2010, 06). How to Promote Earthquake Ruptures: Different Nucleation Strategies in a Dynamic Model with Slip-Weakening Friction. *Bulletin of the Seismological Society of America*, 100(3), 923-940. doi: 10.1785/0120090179

- Boore, D. M., & Joyner, W. B. (1978). The influence of rupture incoherence on seismic directivity. *Bulletin of the Seismological Society of America*, 68(2), 283-300. doi: 10.1785/BSSA0680020283
- Bourdin, B., Francfort, G., & Marigo, J.-J. (2000). Numerical experiments in revisited brittle fracture. *Journal of the Mechanics and Physics of Solids*, 48(4), 797-826. doi: 10.1016/S0022-5096(99)00028-9
- Bourdin, B., Francfort, G. A., & Marigo, J.-J. (2008). The variational approach to fracture. *Journal of Elasticity*, 91(1), 5-148. doi: 10.1007/s10659-007-9107-3
- Bukchin, B. (1995). Determination of stress glut moments of total degree 2 from teleseismic surface wave amplitude spectra. *Tectonophysics*, 248(3), 185-191. (Focal Mechanism and Seismotectonics) doi: 10.1016/0040-1951(94)00271-A
- Cappa, F., Perrin, C., Manighetti, I., & Delor, E. (2014). Off-fault long-term damage: A condition to account for generic, triangular earthquake slip profiles. *Geochemistry, Geophysics, Geosystems*, 15(4), 1476-1493. doi: 10.1002/2013GC005182
- Castro, R. R., & Ben-Zion, Y. (2013). Potential Signatures of Damage-Related Radiation from Aftershocks of the 4 April 2010 (Mw 7.2) El Mayor-Cucapah Earthquake, Baja California, México. *Bulletin of the Seismological Society of America*, 103(2A), 1130-1140. doi: 10.1785/0120120163
- Chaljub, E., Maufroy, E., Moczo, P., Kristek, J., Hollender, F., Bard, P.-Y., ... Chen, X. (2015). 3-D numerical simulations of earthquake ground motion in sedimentary basins: testing accuracy through stringent models. *Geophysical Journal International*, 201(1), 90-111. doi: 10.1093/gji/ggu472
- Chaljub, E., Moczo, P., Tsuno, S., Bard, P.-Y., Kristek, J., Käser, M., ... Kristekova, M. (2010). Quantitative Comparison of Four Numerical Predictions of 3D Ground Motion in the Grenoble Valley, France. *Bulletin of the Seismological Society of America*, 100(4), 1427-1455. doi: 10.1785/0120090052
- Chen, P., Jordan, T. H., & Zhao, L. (2005). Finite-Moment Tensor of the 3 September 2002 Yorba Linda Earthquake. *Bulletin of the Seismological Society of America*, 95(3), 1170-1180. doi: 10.1785/0120040094
- Cheng, Y., Ross, Z. E., & Ben-Zion, Y. (2018). Diverse Volumetric Faulting Patterns in the San Jacinto Fault Zone. *Journal of Geophysical Research: Solid Earth*, 123(6), 5068-5081. doi: 10.1029/2017JB015408
- Chester, F. M., & Chester, J. S. (1998). Ultracataclasite structure and friction processes of the Punchbowl fault, San Andreas system, California. *Tectonophysics*, 295(1), 199-221. doi: 10.1016/S0040-1951(98)00121-8
- Chester, F. M., & Logan, J. M. (1986). Implications for mechanical properties of brittle faults from observations of the Punchbowl fault zone, California. *pure and applied geophysics*, 124(1), 79-106. doi: 10.1007/BF00875720
- Clévéde, E., Bouin, M.-P., Bukchin, B., Mostinskiy, A., & Patau, G. (2004). New constraints on the rupture process of the 1999 August 17 Izmit earthquake deduced from estimates of stress glut rate moments. *Geophysical Journal International*, 159(3), 931-942. doi: 10.1111/j.1365-246X.2004.02304.x
- Cruz-Atienza, V. M., & Virieux, J. (2004). Dynamic rupture simulation of non-planar faults with a finite-difference approach. *Geophysical Journal International*, 158(3), 939-954. doi: 10.1111/j.1365-246X.2004.02291.x
- Dalguer, L. A., & Day, S. M. (2006). Comparison of fault representation methods in finite difference simulations of dynamic rupture. *Bulletin of the Seismological Society of America*, 96(5), 1764-1778. doi: 10.1785/0120060024
- Day, S. M., Dalguer, L. A., Lapusta, N., & Liu, Y. (2005). Comparison of finite difference and boundary integral solutions to three-dimensional spontaneous rupture. *Journal of Geophysical Research: Solid Earth*, 110(B12). doi: 10.1029/2005JB003813
- de la Puente, J., Ampuero, J.-P., & Käser, M. (2009). Dynamic rupture modeling on unstructured meshes using a discontinuous Galerkin method.

- Journal of Geophysical Research: Solid Earth*, 114(B10302), 1–17. doi: 10.1029/2008JB006271
- De Borst, R., Remmers, J. J. C., Needleman, A., & Abellan, M.-A. (2004). Discrete vs smeared crack models for concrete fracture: bridging the gap. *International Journal for Numerical and Analytical Methods in Geomechanics*, 28(7-8), 583-607. doi: 10.1002/nag.374
- Dieterich, J. H. (1981). Constitutive properties of faults with simulated gouge. In N. L. Carter, M. Friedman, J. M. Logan, & D. W. Stearns (Eds.), *Monograph 24: Mechanical behavior of crustal rocks* (p. 103-120). American Geophysical Union (AGU). doi: 10.1029/GM024p0103
- Dumbser, M., & Käser, M. (2006). An arbitrary high-order discontinuous Galerkin method for elastic waves on unstructured meshes — II. The three-dimensional isotropic case. *Geophysical Journal International*, 167(1), 319-336. doi: 10.1111/j.1365-246X.2006.03120.x
- Dunham, E. M., Belanger, D., Cong, L., & Kozdon, J. E. (2011). Earthquake Ruptures with Strongly Rate-Weakening Friction and Off-Fault Plasticity, Part 1: Planar Faults. *Bulletin of the Seismological Society of America*, 101(5), 2296-2307. doi: 10.1785/0120100075
- Duru, K., & Dunham, E. M. (2016). Dynamic earthquake rupture simulations on nonplanar faults embedded in 3d geometrically complex, heterogeneous elastic solids. *Journal of Computational Physics*, 305, 185-207. doi: 10.1016/j.jcp.2015.10.021
- Eshelby, J. D., & Peierls, R. E. (1957). The determination of the elastic field of an ellipsoidal inclusion, and related problems. *Proceedings of the Royal Society of London. Series A. Mathematical and Physical Sciences*, 241(1226), 376-396. doi: 10.1098/rspa.1957.0133
- Faulkner, D., Lewis, A., & Rutter, E. (2003). On the internal structure and mechanics of large strike-slip fault zones: field observations of the carboneras fault in southeastern Spain. *Tectonophysics*, 367(3), 235-251. doi: 10.1016/S0040-1951(03)00134-3
- Fei, F., & Choo, J. (2019). A phase-field method for modeling cracks with frictional contact. *International Journal for Numerical Methods in Engineering*, 121(4), 740–762. doi: 10.1002/nme.6242
- Fei, F., & Choo, J. (2020). A phase-field model of frictional shear fracture in geologic materials. *Computer Methods in Applied Mechanics and Engineering*, 369, 113265. doi: 10.1016/j.cma.2020.113265
- Fei, F., & Choo, J. (2021). Double-phase-field formulation for mixed-mode fracture in rocks. *Computer Methods in Applied Mechanics and Engineering*, 376, 113655. doi: 10.1016/j.cma.2020.113655
- Fei, F., Mia, M. S., Elbanna, A. E., & Choo, J. (2023). A phase-field model for quasi-dynamic nucleation, growth, and propagation of rate-and-state faults. *International Journal for Numerical and Analytical Methods in Geomechanics*, 47(2), 187-211. doi: 10.1002/nag.3465
- Festa, G., & Vilotte, J.-P. (2006). Influence of the rupture initiation on the intersonic transition: Crack-like versus pulse-like modes. *Geophysical Research Letters*, 33(15). doi: 10.1029/2006GL026378
- Gabriel, A.-A., Ampuero, J.-P., Dalguer, L. A., & Mai, P. M. (2012). The transition of dynamic rupture styles in elastic media under velocity-weakening friction. *Journal of Geophysical Research: Solid Earth*, 117(B9). doi: 10.1029/2012JB009468
- Gabriel, A.-A., Ampuero, J.-P., Dalguer, L. A., & Mai, P. M. (2013). Source properties of dynamic rupture pulses with off-fault plasticity. *Journal of Geophysical Research: Solid Earth*, 118(8), 4117-4126. doi: 10.1002/jgrb.50213
- Gabriel, A.-A., Li, D., Chiochetti, S., Tavelli, M., Peshkov, I., Romenski, E., & Dumbser, M. (2021). A unified first-order hyperbolic model for nonlinear

- dynamic rupture processes in diffuse fracture zones. *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 379(2196), 20200130. doi: 10.1098/rsta.2020.0130
- Gabriel, A.-A., Taufiqurrahman, T., Li, D., Ulrich, T., Li, B., Carena, S., ... Gallovič, F. (2023). Conversations between earthquakes: Dynamics and delays of the 2019 Ridgecrest rupture sequence. (PREPRINT (Version 1) available at Research Square) doi: 10.21203/rs.3.rs-1906712/v1
- Galis, M., Pelties, C., Kristek, J., Moczo, P., Ampuero, J.-P., & Mai, P. M. (2014). On the initiation of sustained slip-weakening ruptures by localized stresses. *Geophysical Journal International*, 200(2), 890-909. doi: 10.1093/gji/ggu436
- Galvez, P., Ampuero, J.-P., Dalguer, L. A., Somala, S. N., & Nissen-Meyer, T. (2014). Dynamic earthquake rupture modelled with an unstructured 3-D spectral element method applied to the 2011 M9 Tohoku earthquake. *Geophysical Journal International*, 198(2), 1222-1240. doi: 10.1093/gji/ggu203
- Griffith, A. A., & Taylor, G. I. (1921). VI. The phenomena of rupture and flow in solids. *Philosophical Transactions of the Royal Society of London. Series A, Containing Papers of a Mathematical or Physical Character*, 221(582-593), 163-198. doi: 10.1098/rsta.1921.0006
- Hanks, T. C. (1982).  $f_{max}$ . *Bulletin of the Seismological Society of America*, 72(6A), 1867-1879. doi: 10.1785/BSSA07206A1867
- Harris, R. A., Barall, M., Aagaard, B., Ma, S., Roten, D., Olsen, K., ... Dalguer, L. (2018). A Suite of Exercises for Verifying Dynamic Earthquake Rupture Codes. *Seismological Research Letters*, 89(3), 1146-1162. doi: 10.1785/0220170222
- Harris, R. A., Barall, M., Andrews, D. J., Duan, B., Ma, S., Dunham, E. M., ... Abrahamson, N. (2011). Verifying a Computational Method for Predicting Extreme Ground Motion. *Seismological Research Letters*, 82(5), 638-644. Retrieved from <https://doi.org/10.1785/gssr1.82.5.638> doi: 10.1785/gssr1.82.5.638
- Harris, R. A., Barall, M., Archuleta, R., Dunham, E., Aagaard, B., Ampuero, J.-P., ... Templeton, E. (2009). The SCEC/USGS dynamic earthquake rupture code verification exercise. *Seismological Research Letters*, 80(1), 119-126. doi: 10.1785/gssr1.80.1.119
- Harris, R. A., Barall, M., Lockner, D. A., Moore, D. E., Ponce, D. A., Graymer, R. W., ... Eberhart-Phillips, D. (2021). A geology and geodesy based model of dynamic earthquake rupture on the rogers creek-hayward-calaveras fault system, california. *Journal of Geophysical Research: Solid Earth*, 126(3), e2020JB020577. doi: 10.1029/2020JB020577
- Herrendörfer, R., Gerya, T., & van Dinther, Y. (2018). An Invariant Rate- and State-Dependent Friction Formulation for Viscoelastoplastic Earthquake Cycle Simulations. *Journal of Geophysical Research: Solid Earth*, 123(6), 5018-5051. doi: 10.1029/2017JB015225
- Huang, Y., Ampuero, J.-P., & Helmberger, D. V. (2014). Earthquake ruptures modulated by waves in damaged fault zones. *Journal of Geophysical Research: Solid Earth*, 119(4), 3133-3154. doi: 10.1002/2013JB010724
- Hughes, T. J. R. (2000). Chapter 9 - Algorithms for Hyperbolic and Hyperbolic-Parabolic Problems. In *The finite element method: Linear Static and Dynamic Finite Element Analysis* (p. 490 - 567). Dover Publications.
- Ida, Y. (1972). Cohesive force across the tip of a longitudinal-shear crack and Griffith's specific surface energy. *Journal of Geophysical Research*, 77(20), 3796-3805. doi: 10.1029/jb077i020p03796
- Idini, B., & Ampuero, J.-P. (2020). Fault-Zone Damage Promotes Pulse-Like Rupture and Back-Propagating Fronts via Quasi-Static Effects. *Geophysical Research Letters*, 47(23), e2020GL090736. (e2020GL090736 10.1029/2020GL090736) doi: <https://doi.org/10.1029/2020GL090736>



- Igel, H. (2017). *Computational Seismology: A practical introduction*. Oxford University Press, USA. doi: 10.1080/09553007914550501
- Jirásek, M., & Zimmermann, T. (1998a). Analysis of rotating crack model. *Journal of Engineering Mechanics*, 124(8), 842-851. doi: 10.1061/(ASCE)0733-9399(1998)124:8(842)
- Jirásek, M., & Zimmermann, T. (1998b). Rotating crack model with transition to scalar damage. *Journal of Engineering Mechanics*, 124(3), 277-284. doi: 10.1061/(ASCE)0733-9399(1998)124:3(277)
- Jirásek, M., & Zimmermann, T. (2001a). Embedded crack model: I. Basic formulation. *International Journal for Numerical Methods in Engineering*, 50(6), 1269-1290. doi: 10.1002/1097-0207(20010228)50:6<1269::AID-NME11>3.0.CO;2-U
- Jirásek, M., & Zimmermann, T. (2001b). Embedded crack model. Part II: combination with smeared cracks. *International Journal for Numerical Methods in Engineering*, 50(6), 1291-1305. doi: 10.1002/1097-0207(20010228)50:6<1291::AID-NME12>3.0.CO;2-Q
- Jordan, T. H., & Juarez, A. (2019). Representation of complex seismic sources by orthogonal moment-tensor fields. *Geophysical Journal International*, 216(3), 1867-1889. doi: 10.1093/gji/ggy492
- Jordan, T. H., & Juarez, A. (2020). Erratum: 'Representation of complex seismic sources by orthogonal moment-tensor fields'. *Geophysical Journal International*, 222(2), 1333-1338. doi: 10.1093/gji/ggaa164
- Jordan, T. H., & Juarez, A. (2021). Stress-strain characterization of seismic source fields using moment measures of mechanism complexity. *Geophysical Journal International*, 227(1), 591-616. doi: 10.1093/gji/ggab218
- Kame, N., & Uchida, K. (2008). Seismic radiation from dynamic coalescence, and the reconstruction of dynamic source parameters on a planar fault. *Geophysical Journal International*, 174(2), 696-706. doi: 10.1111/j.1365-246X.2008.03849.x
- Kaneko, Y., Lapusta, N., & Ampuero, J.-P. (2008). Spectral element modeling of spontaneous earthquake rupture on rate and state faults: Effect of velocity-strengthening friction at shallow depths. *Journal of Geophysical Research: Solid Earth*, 113(B9). doi: 10.1029/2007JB005553
- Klinger, Y., Okubo, K., Vallage, A., Champenois, J., Delorme, A., Rougier, E., ... Bhat, H. S. (2018). Earthquake damage patterns resolve complex rupture processes. *Geophysical Research Letters*, 45(19), 10,279-10,287. doi: 10.1029/2018GL078842
- Komatitsch, D., & Tromp, J. (1999). Introduction to the spectral element method for three-dimensional seismic wave propagation. *Geophysical Journal International*, 139(3), 806-822. doi: 10.1046/j.1365-246x.1999.00967.x
- Komatitsch, D., & Tromp, J. (2002). Spectral-element simulations of global seismic wave propagation—I. Validation. *Geophysical Journal International*, 149(2), 390-412. doi: 10.1046/j.1365-246X.2002.01653.x
- Kostrov, B. V. (1964). Selfsimilar problems of propagation of shear cracks. *Journal of Applied Mathematics and Mechanics*, 28(5), 889-898. doi: 10.1016/0021-8928(64)90010-3
- Lee, S.-J., Huang, B.-S., Ando, M., Chiu, H.-C., & Wang, J.-H. (2011). Evidence of large scale repeating slip during the 2011 Tohoku-Oki earthquake. *Geophysical Research Letters*, 38(19). doi: 10.1029/2011GL049580
- Liu, F., & Borja, R. I. (2013). Extended finite element framework for fault rupture dynamics including bulk plasticity. *International Journal for Numerical and Analytical Methods in Geomechanics*, 37(18), 3087-3111. doi: 10.1002/nag.2179
- Lu, X., Lapusta, N., & Rosakis, A. J. (2009, 05). Analysis of supershear transition regimes in rupture experiments: The effect of nucleation conditions and

- friction parameters. *Geophysical Journal International*, 177(2), 717-732. doi: 10.1111/j.1365-246X.2009.04091.x
- Madariaga, R. (1977). High-frequency radiation from crack (stress drop) models of earthquake faulting. *Geophysical Journal International*, 51(3), 625-651. doi: 10.1111/j.1365-246X.1977.tb04211.x
- Madariaga, R. (1983). High frequency radiation from dynamic earthquake. *Ann. Geophys*, 1, 17.
- Madariaga, R., Olsen, K., & Archuleta, R. (1998). Modeling dynamic rupture in a 3D earthquake fault model. *Bulletin of the Seismological Society of America*, 88(5), 1182-1197. doi: 10.1785/BSSA0880051182
- Marfurt, K. J. (1984). Accuracy of finite-difference and finite-element modeling of the scalar and elastic wave equations. *Geophysics*, 49(5), 533-549. doi: 10.1190/1.1441689
- Marty, S., Passelègue, F. X., Aubry, J., Bhat, H. S., Schubnel, A., & Madariaga, R. (2019). Origin of high-frequency radiation during laboratory earthquakes. *Geophysical Research Letters*, 46(7), 3755-3763. doi: doi.org/10.1029/2018GL080519
- McGuire, J. J. (2017). A MATLAB Toolbox for Estimating the Second Moments of Earthquake Ruptures. *Seismological Research Letters*, 88(2A), 371-378. doi: 10.1785/0220160170
- McGuire, J. J., Zhao, L., & Jordan, T. H. (2001). Teleseismic inversion for the second degree moments of earthquake space-time distributions. *Geophysical Journal International*, 145(3), 661-678. doi: 10.1046/j.1365-246x.2001.01414.x
- McGuire, J. J., Zhao, L., & Jordan, T. H. (2002). Predominance of Unilateral Rupture for a Global Catalog of Large Earthquakes. *Bulletin of the Seismological Society of America*, 92(8), 3309-3317. doi: 10.1785/0120010293
- Miehe, C., & Schänzel, L.-M. (2014). Phase field modeling of fracture in rubbery polymers. Part I: Finite elasticity coupled with brittle failure. *Journal of the Mechanics and Physics of Solids*, 65, 93-113. doi: 10.1016/j.jmps.2013.06.007
- Miehe, C., Schänzel, L.-M., & Ulmer, H. (2015). Phase field modeling of fracture in multi-physics problems. part i. balance of crack surface and failure criteria for brittle crack propagation in thermo-elastic solids. *Computer Methods in Applied Mechanics and Engineering*, 294, 449-485. doi: 10.1016/j.cma.2014.11.016
- Milliner, C., Donnellan, A., Aati, S., Avouac, J.-P., Zinke, R., Dolan, J. F., ... Bürgmann, R. (2021). Bookshelf Kinematics and the Effect of Dilatation on Fault Zone Inelastic Deformation: Examples From Optical Image Correlation Measurements of the 2019 Ridgecrest Earthquake Sequence. *Journal of Geophysical Research: Solid Earth*, 126(3), e2020JB020551. (e2020JB020551 2020JB020551) doi: 10.1029/2020JB020551
- Milliner, C. W. D., Dolan, J. F., Hollingsworth, J., Leprince, S., Ayoub, F., & Sammis, C. G. (2015). Quantifying near-field and off-fault deformation patterns of the 1992 Mw 7.3 Landers earthquake. *Geochemistry, Geophysics, Geosystems*, 16(5), 1577-1598. doi: 10.1002/2014GC005693
- Mirzabozorg, H., & Ghaemian, M. (2005). Non-linear behavior of mass concrete in three-dimensional problems using a smeared crack approach. *Earthquake Engineering & Structural Dynamics*, 34(3), 247-269. doi: 10.1002/eqe.423
- Moës, N., Dolbow, J., & Belytschko, T. (1999). A finite element method for crack growth without remeshing. *International Journal for Numerical Methods in Engineering*, 46(1), 131-150. doi: 10.1002/(SICI)1097-0207(19990910)46:1<131::AID-NME726>3.0.CO;2-J
- Nielsen, S., & Madariaga, R. (2003, 12). On the Self-Healing Fracture Mode. *Bulletin of the Seismological Society of America*, 93(6), 2375-2388. doi: 10.1785/0120020090

- Oeser, J., Bunge, H.-P., & Mohr, M. (2006). Cluster design in the earth sciences tethys. In M. Gerndt & D. Kranzlmüller (Eds.), *High performance computing and communications* (pp. 31–40). Berlin, Heidelberg: Springer Berlin Heidelberg.
- Okubo, K., Bhat, H. S., Rougier, E., Marty, S., Schubnel, A., Lei, Z., ... Klinger, Y. (2019). Dynamics, radiation, and overall energy budget of earthquake rupture with coseismic off-fault damage. *Journal of Geophysical Research: Solid Earth*, *124*(11), 11771–11801. doi: 10.1029/2019JB017304
- Palmer, A. C., & Rice, J. R. (1973). The growth of slip surfaces in the progressive failure of over-consolidated clay. *Proceedings of the Royal Society of London. A. Mathematical and Physical Sciences*, *332*(1591), 527–548. doi: 10.1098/rspa.1973.0040
- Passelègue, F. X., Spagnuolo, E., Violay, M., Nielsen, S., Di Toro, G., & Schubnel, A. (2016). Frictional evolution, acoustic emissions activity, and off-fault damage in simulated faults sheared at seismic slip rates. *Journal of Geophysical Research: Solid Earth*, *121*(10), 7490–7513. doi: 10.1002/2016JB012988
- Pelties, C., de la Puente, J., Ampuero, J.-P., Brietzke, G. B., & Käser, M. (2012). Three-dimensional dynamic rupture simulation with a high-order discontinuous galerkin method on unstructured tetrahedral meshes. *Journal of Geophysical Research: Solid Earth*, *117*(B2). doi: 10.1029/2011JB008857
- Perrin, C., Manighetti, I., & Gaudemer, Y. (2016). Off-fault tip splay networks: A genetic and generic property of faults indicative of their long-term propagation. *Comptes Rendus Geoscience*, *348*(1), 52–60. (From past to current tectonics) doi: 10.1016/j.crte.2015.05.002
- Peter, D., Komatitsch, D., Luo, Y., Martin, R., Le Goff, N., Casarotti, E., ... Tromp, J. (2011). Forward and adjoint simulations of seismic wave propagation on fully unstructured hexahedral meshes. *Geophysical Journal International*, *186*(2), 721–739. doi: 10.1111/j.1365-246X.2011.05044.x
- Pranger, C., Sanan, P., May, D. A., Le Pourhiet, L., & Gabriel, A.-A. (2022). Rate and state friction as a spatially regularized transient viscous flow law. *Journal of Geophysical Research: Solid Earth*, *127*(6), e2021JB023511. (e2021JB023511 2021JB023511) doi: 10.1029/2021JB023511
- Preuss, S., Herrendörfer, R., Gerya, T., Ampuero, J.-P., & van Dinther, Y. (2019). Seismic and aseismic fault growth lead to different fault orientations. *Journal of Geophysical Research: Solid Earth*, *124*(8), 8867–8889. doi: 10.1029/2019JB017324
- Ramos, M. D., Thakur, P., Huang, Y., Harris, R. A., & Ryan, K. J. (2022). Working with Dynamic Earthquake Rupture Models: A Practical Guide. *Seismological Research Letters*, *93*(4), 2096–2110. doi: 10.1785/0220220022
- Reinartz, A., Charrier, D. E., Bader, M., Bovard, L., Dumbser, M., Duru, K., ... others (2020). Exahype: an engine for parallel dynamically adaptive simulations of wave problems. *Computer Physics Communications*, *254*, 107251.
- Resnyansky, A. D., Romensky, E. I., & Bourne, N. K. (2003). Constitutive modeling of fracture waves. *Journal of Applied Physics*, *93*(3), 1537–1545. doi: 10.1063/1.1534382
- Romenskii, E. I. (2007). Deformation model for brittle materials and the structure of failure waves. *Journal of applied mechanics and technical physics*, *48*(3), 437–444. doi: 10.1007/s10808-007-0054-3
- Rots, J. G. (1988). *Computational modeling of concrete fracture* (Unpublished doctoral dissertation). Delft University of Technology.
- Rots, J. G., & Blaauwendraad, J. (1989). Crack models for concrete: discrete or smeared? fixed, multi-directional or rotating? *HERON*, *34* (1), 1989.
- Rudi, J., Malossi, A. C. I., Isaac, T., Stadler, G., Gurnis, M., Staar, P. W. J., ... Ghattas, O. (2015). An extreme-scale implicit solver for complex pdes: Highly heterogeneous flow in earth’s mantle. In *Proceedings of the interna-*

- tional conference for high performance computing, networking, storage and analysis. New York, NY, USA: Association for Computing Machinery. doi: 10.1145/2807591.2807675
- Rudi, J., Stadler, G., & Ghattas, O. (2017). Weighted BFBT Preconditioner for Stokes Flow Problems with Highly Heterogeneous Viscosity. *SIAM Journal on Scientific Computing*, 39(5), S272-S297. doi: 10.1137/16M108450X
- Ruina, A. (1983). Slip instability and state variable friction laws. *Journal of Geophysical Research: Solid Earth*, 88(B12), 10359-10370. doi: 10.1029/JB088iB12p10359
- Seriani, G., & Priolo, E. (1994). Spectral element method for acoustic wave simulation in heterogeneous media. *Finite elements in analysis and design*, 16(3), 337-348. doi: 10.1016/0168-874X(94)90076-0
- Sharples, W., Moresi, L., Velic, M., Jadamec, M., & May, D. (2016). Simulating faults and plate boundaries with a transversely isotropic plasticity model. *Physics of the Earth and Planetary Interiors*, 252, 77-90. doi: 10.1016/j.pepi.2015.11.007
- Shi, Z., Ben-Zion, Y., & Needleman, A. (2008). Properties of dynamic rupture and energy partition in a solid with a frictional interface. *Journal of the Mechanics and Physics of Solids*, 56(1), 5-24. doi: 10.1016/j.jmps.2007.04.006
- Spatschek, R., Brener, E., & Karma, A. (2011). Phase field modeling of crack propagation. *Philosophical Magazine*, 91(1), 75-95. doi: 10.1080/14786431003773015
- Sun, Y., & Beckermann, C. (2007). Sharp interface tracking using the phase-field equation. *Journal of Computational Physics*, 220(2), 626-653. doi: 10.1016/j.jcp.2006.05.025
- Tanarro, Á., Mallor, F., Offermans, N., Peplinski, A., Vinuesa, R., & Schlatter, P. (2020, Aug 01). Enabling adaptive mesh refinement for spectral-element simulations of turbulence around wing sections. *Flow, Turbulence and Combustion*, 105(2), 415-436. doi: 10.1007/s10494-020-00152-y
- Tavelli, M., Chicchetti, S., Romenski, E., Gabriel, A.-A., & Dumbser, M. (2020). Space-time adaptive ADER discontinuous Galerkin schemes for nonlinear hyperelasticity with material failure. , *limi*.
- Tavelli, M., Dumbser, M., Charrier, D. E., Rannabauer, L., Weinzierl, T., & Bader, M. (2019a). A simple diffuse interface approach on adaptive cartesian grids for the linear elastic wave equations with complex topography. *Journal of Computational Physics*, 386, 158-189. doi: 10.1016/j.jcp.2019.02.004
- Tavelli, M., Dumbser, M., Charrier, D. E., Rannabauer, L., Weinzierl, T., & Bader, M. (2019b). A simple diffuse interface approach on adaptive Cartesian grids for the linear elastic wave equations with complex topography. *Journal of Computational Physics*, 386, 158-189. doi: 10.1016/j.jcp.2019.02.004
- Templeton, E. L., & Rice, J. R. (2008). Off-fault plasticity and earthquake rupture dynamics: 1. Dry materials or neglect of fluid pressure changes. *Journal of Geophysical Research: Solid Earth*, 113(B09306). doi: 10.1029/2007JB005529
- Ulrich, T., Gabriel, A.-A., Ampuero, J.-P., & Xu, W. (2019). Dynamic viability of the 2016 mw 7.8 kaikōura earthquake cascade on weak crustal faults. *Nature Communications*, 10(1), 1213. doi: 10.1038/s41467-019-09125-w
- Uphoff, C., May, D. A., & Gabriel, A.-A. (2022). A discontinuous Galerkin method for sequences of earthquakes and aseismic slip on multiple faults using unstructured curvilinear grids. *EarthArxiv*. (submitted) doi: 10.31223/X50627
- Vallée, M., Xie, Y., Grandin, R., Villegas-Lanza, J. C., Nocquet, J.-M., Vaca, S., ... Rolandone, F. (2023). Self-reactivated rupture during the 2019 Mw=8 northern Peru intraslab earthquake. *Earth and Planetary Science Letters*, 601, 117886. doi: 10.1016/j.epsl.2022.117886
- Weldon II, R. J., & Springer, J. E. (1988). Active faulting near the Cajon Pass well, southern California; Implications for the stress orientation near the

- San Andreas Fault. *Geophysical Research Letters*, 15(9), 993-996. doi: 10.1029/GL015i009p00993
- Wilcox, L. C., Stadler, G., Burstedde, C., & Ghattas, O. (2010). A high-order discontinuous galerkin method for wave propagation through coupled elastic-acoustic media. *Journal of Computational Physics*, 229(24), 9373-9396.
- Withers, K. B., Olsen, K. B., Day, S. M., & Shi, Z. (2018). Ground Motion and Intraevent Variability from 3D Deterministic Broadband (0-7.5 Hz) Simulations along a Nonplanar Strike-Slip Fault. *Bulletin of the Seismological Society of America*, 109(1), 229-250. doi: 10.1785/0120180006
- Wollherr, S., Gabriel, A.-A., & Uphoff, C. (2018). Off-fault plasticity in three-dimensional dynamic rupture simulations using a modal Discontinuous Galerkin method on unstructured meshes: Implementation, verification and application. *Geophysical Journal International*, 214(3), 1556-1584. doi: 10.1093/GJI/GGY213
- Xu, S., Ben-Zion, Y., Ampuero, J.-P., & Lyakhovskiy, V. (2015). Dynamic ruptures on a frictional interface with off-fault brittle damage: Feedback mechanisms and effects on slip and near-fault motion. *Pure and Applied Geophysics*, 172(5), 1243-1267. Retrieved from <https://doi.org/10.1007/s00024-014-0923-7> doi: 10.1007/s00024-014-0923-7
- Yuan, S., Gesele, K., Gabriel, A.-A., May, D. A., Wassermann, J., & Igel, H. (2021). Seismic source tracking with six degree-of-freedom ground motion observations. *Journal of Geophysical Research: Solid Earth*, 126(3), e2020JB021112. doi: 10.1029/2020JB021112
- Zhang, X., Sloan, S. W., Vignes, C., & Sheng, D. (2017). A modification of the phase-field model for mixed mode crack propagation in rock-like materials. *Computer Methods in Applied Mechanics and Engineering*, 322, 123-136. doi: 10.1016/j.cma.2017.04.028
- Zhang, Z., Zhang, W., & Chen, X. (2014). Three-dimensional curved grid finite-difference modelling for non-planar rupture dynamics. *Geophysical Journal International*, 199(2), 860-879. doi: 10.1093/gji/ggu308