

1 **Offsetting Carbon Capture and Storage costs with methane and**
2 **geothermal energy production through reuse of a depleted**
3 **hydrocarbon field coupled with a saline aquifer**

4

5 Jonathan Scafidi¹ and Stuart M.V. Gilfillan¹

6 ¹School of GeoSciences, University of Edinburgh, James Hutton Road,
7 Edinburgh, EH9 3FE, UK

8 Keywords: carbon capture and storage; dissolution storage; dissolved
9 methane; geothermal energy; re-using oil and gas infrastructure

10 **Abstract**

11 Co-production of methane and geothermal energy from produced
12 subsurface brines with onsite power generation and carbon capture has
13 been proposed as a technically feasible means to reduce the costs of
14 offshore carbon storage sites. In such a facility, methane is degassed
15 from produced brine, this brine is then cooled allowing the extraction of
16 heat and then CO₂ is dissolved into it for reinjection into a porous rock
17 formation. Once injected into the porous reservoir formation, this CO₂-
18 loaded brine will sink due to its relatively higher density, providing secure
19 storage. Here, for the first time, we investigate, the economic feasibility
20 and energy balance of such a system within the UK North Sea. We
21 examine the suitability of a depleted hydrocarbon field coupled with a
22 saline formation located in the Inner Moray Firth, Scotland. We find that
23 such a system would be highly likely to have a positive energy balance,

24 and would be an order of magnitude cheaper than decommissioning.
25 Furthermore, as only 10% of the sites storage capacity is needed for
26 disposal of the CO₂ emissions associated with its operation, there is
27 significant potential for additional revenue creation from storing CO₂ from
28 other sources. Whilst the chosen case study site was not ideal, due to its
29 relatively shallow depth, and hence lower than ideal heat potential, it
30 demonstrates that reuse of redundant oil & gas infrastructure that would
31 otherwise be decommissioned could help to offset some of the financial
32 barriers to developing a carbon storage industry in the UK North Sea.

33 **1 INTRODUCTION**

34 **1.1 BACKGROUND**

35 Global carbon dioxide emissions from fossil fuel use must be drastically
36 reduced to limit anthropogenic warming to 2°C above pre-industrial levels
37 as agreed by the European Union and the 194 signatory states to the
38 Paris Agreement. Carbon capture and storage (CCS) involves the capture
39 of CO₂ from point sources followed by long-term storage in geological
40 formations. CCS is the only existing technology that can directly reduce
41 emissions from industrial processes such as cement and steel
42 manufacture and many forms of chemical synthesis (Alcalde *et al.*, 2018)
43 Combined with the combustion of bioenergy (BECCS), the technology
44 offers the potential of significant negative emissions and is included in
45 numerous future energy modelling scenarios that meet the 2°C target of

46 the Paris Agreement (Azar, Johansson and Mattsson, 2013; Scott *et al.*,
47 2013; IEA, 2014; IPCC, 2014)

48 Despite the potential emissions reductions offered by CCS, and
49 projections of the long-term cost-effectiveness of it compared with other
50 carbon reduction technologies (e.g. IPCC, 2014), the upfront capital
51 expenditure required for a CCS project are a significant barrier to its
52 industrial scale deployment. The current financial regimes have yet to
53 produce a sufficiently high carbon price to result in widespread
54 implementation of CCS and hence there have been concerted efforts to
55 make it more cost-effective. Using captured CO₂ to enhance oil recovery
56 (EOR) is one method that has proved to be successful at offsetting some
57 of the capital costs of capture and storage (IEA, 2015; Stewart *et al.*,
58 2018). Recently, methane and geothermal energy co-production has been
59 proposed as an option at storage sites to generate additional revenue in a
60 similar fashion to CO₂-EOR (Bryant and Pope, 2015; Ganjdanesh and
61 Hosseini, 2016).

62 **1.2 CO-PRODUCTION OF METHANE, BRINE, AND GEOTHERMAL ENERGY**

63 Subsurface waters in many sedimentary basins have been found to
64 contain dissolved methane and these have been commercially exploited to
65 produce natural gas for decades in a several regions (Marsden, 1979;
66 Mankin, 1983; Littke *et al.*, 1999). Building on these existing extraction
67 sites, Bryant (2013) proposed an onshore “closed-loop” system where
68 brine is extracted from deep, hot, overpressured saline aquifers and the

69 methane separated. The methane and hot brine could be sold for power
70 generation and heating respectively. CO₂ captured from the power
71 generation process would be dissolved into the now cold brine before
72 reinjection into the subsurface. This closed-loop model emits very little
73 CO₂ and provides scope for disposal of CO₂ from other external sources.
74 Additionally, as CO₂ saturated brine is denser than native brine and sinks
75 this technique would remove the risk of leakage through buoyant
76 migration. Pressure management and brine disposal issues associated
77 with supercritical CO₂ storage in saline aquifers are also addressed
78 through the brine reinjection process.

79 Here, inspired by this concept, we investigate the economic feasibility of a
 80 system (Figure 1) with onsite power generation (gas to electricity) and
 81 carbon capture coupled with a depleted hydrocarbon reservoir and saline
 82 aquifer in a nearshore depleted hydrocarbon field located in the Inner
 83 Moray Firth of the UK North Sea.

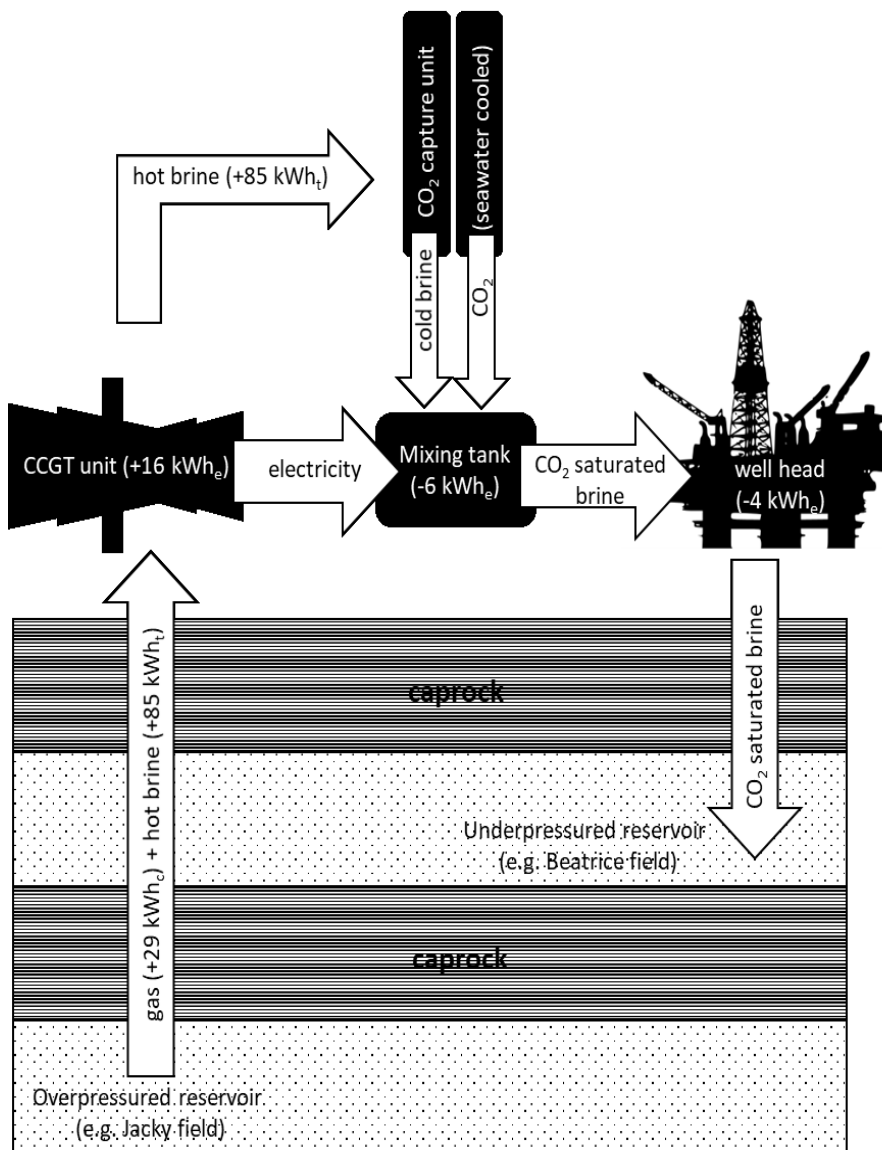


Figure 1: Schematic overview of the system, illustrating both the above surface capture and separation process and the subsurface underpressured storage aquifer and overpressured production aquifer required for the closed loop system. This also highlights the potential energy produced and required in the different stages of the process. kWh_e = high grade energy (electricity); kWh_t = low grade energy (heat)

84 In this system, brine would be produced from saline aquifers in the region
85 utilising existing oil & gas infrastructure. We aim to determine if such a
86 scheme will be economically and technically feasible in an area without
87 access to deep, hot, overpressured aquifers and if reusing oil & gas
88 infrastructure can limit its costs, postpone decommissioning and help
89 open up the UK North Sea to a future carbon storage industry.

90 In this system (based on that originally proposed by Bryant (2013))
91 methane saturated brine is extracted from an overpressured saline
92 aquifer. The methane is recovered and used to fuel an onsite combined
93 cycle gas turbine (CCGT). CCGTs are common on offshore platforms
94 (Welander, 2000), with the majority achieving efficiencies of between 50 -
95 60%, with modern units being the most efficient (Aminov *et al.*, 2016).
96 The "gas-to-wire" concept is being explored as an option in the UK and a
97 recent report (Oil & Gas Authority, 2018) suggests that it is both
98 technically and economically feasible to repurpose existing infrastructure
99 and tie-in offshore wind developments to produce electricity from gas.
100 Furthermore the collaboration between gas and offshore wind will help to
101 reduce operating costs and the technology could be applied to offshore
102 hydrogen production as an aid to balancing the intermittency of
103 renewable energy sources (Oil & Gas Authority, 2018).

104 In our modelled scenario, an onsite carbon capture unit powered by
105 geothermal energy would also be installed to capture the CO₂ produced
106 from the CCGT. In this setup, a post-combustion ammonia capture

107 system will be considered, as this is significantly more energy efficient
108 with lower capital expenditure (CAPEX) and operating expenses (OPEX)
109 than standard amine capture systems (Sutter, Gazzani and Mazzotti,
110 2016). The ammonia capture system requires heating and cooling which
111 can be provided by geothermal energy from the extracted brine and
112 seawater, respectively.

113 The captured CO₂ is then dissolved into the brine and injected into a
114 depleted hydrocarbon field where it sinks due to its relatively higher
115 density. Eventually brine injection will switch to the saline aquifer for
116 pressure management purposes. The injection process is powered by a
117 portion of the electricity produced by the gas turbine with the remainder
118 being sold into the national electricity grid. Figure 1 shows a schematic of
119 the whole system. This process has the added benefit of generating low
120 carbon electricity while reusing existing platforms, helping to reduce both
121 CAPEX and OPEX.

122 1.3 CASE STUDY SITE AND AQUIFERS

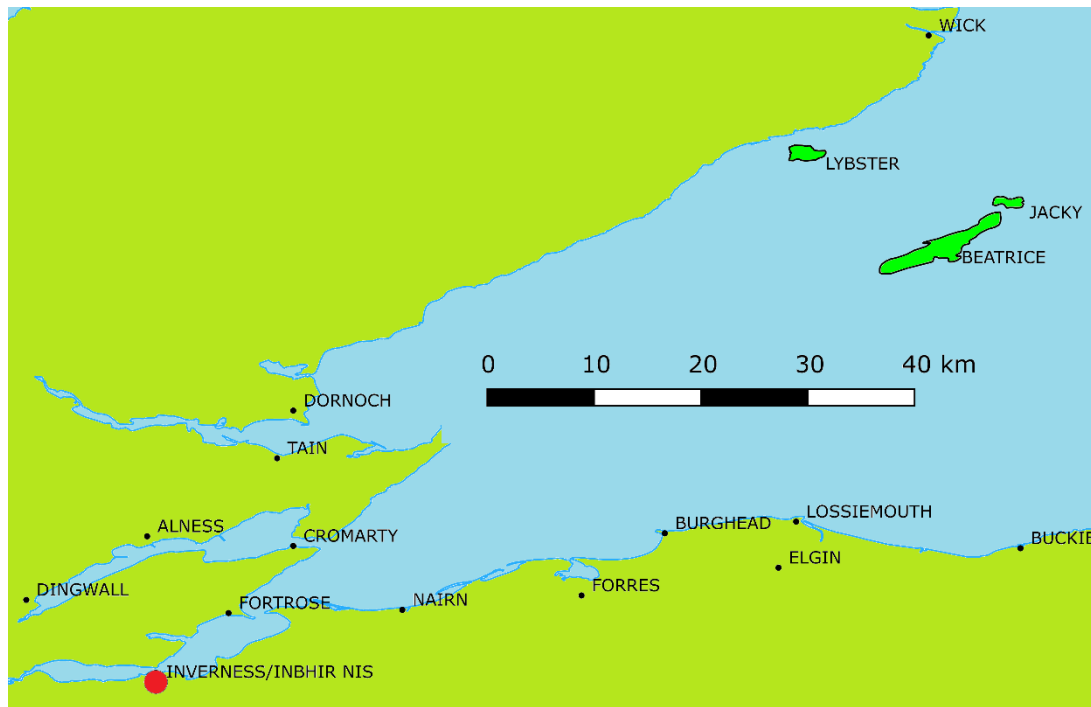


Figure 2: Location of the Beatrice and Jacky oil fields (outlined in black with bright green fill) in the Moray Firth (see Figure 4 for zoom in of oil fields). Made using data from OGA (2018)

123 The Beatrice and Jacky oilfields are situated in the Inner Moray Firth
124 (Figure 2). They contain five platforms between them along with oil
125 pipelines to shore and an electrical connection to the UK national grid.
126 They both produced waxy oil with a low API (38 - 38.9°) and low gas to
127 oil ratio (GOR). The producing formations in both fields were the Beatrice
128 and Mains formations (Figure 3), though the two fields are separated by a
129 fault. Field production records indicate that this fault maintains a
130 significant pressure difference between the two fields and indicate that
131 the Beatrice oilfield is located within a closed aquifer and the Jacky oilfield
132 is within an open, connected aquifer. A 3D model of the two fields can be
133 seen in Figure 4). This is supported by the fact that the Beatrice oilfield
134 required artificial lift and downhole pumps from the start of production

135 (Stevens, 1991b) and the Jacky oilfield flowed without artificial lift for
 136 almost two years (Ithaca Energy, 2009).

Section E



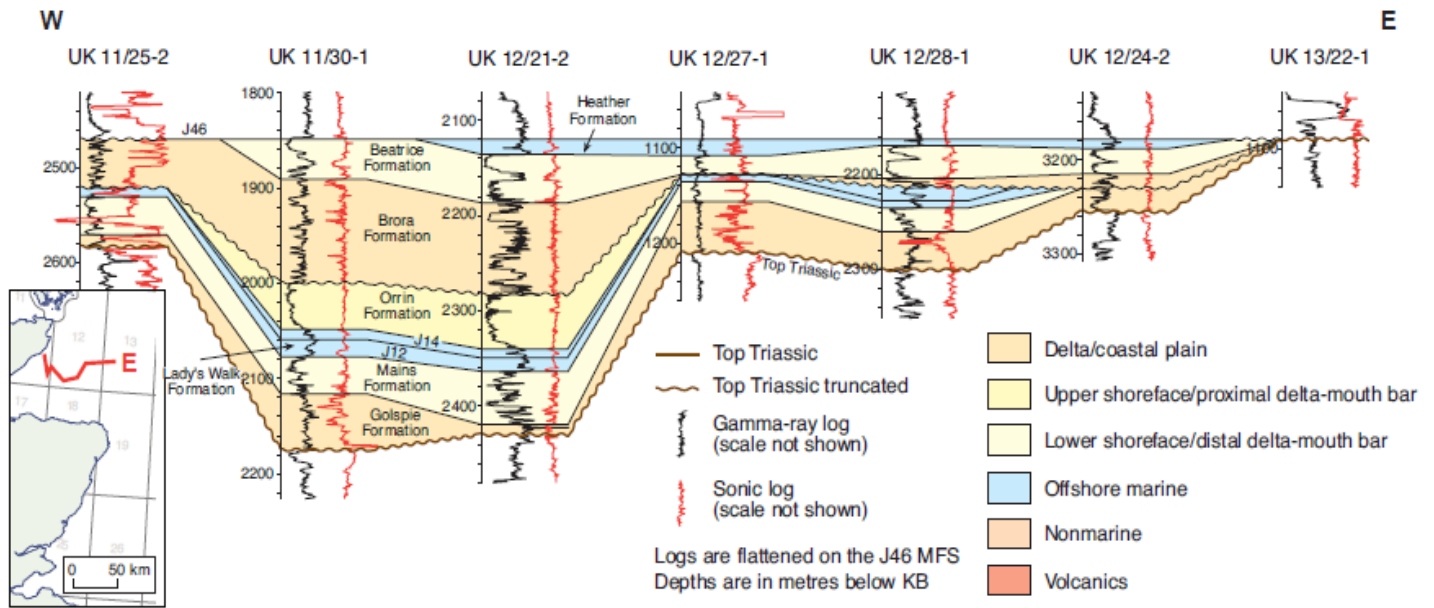


Figure 3: Well logs showing the extent of the Beatrice and Mains formations in the Moray Firth. Adapted from Evans et al. (2003)

137 Extraction of methane rich brine from an overpressured aquifer (in this
 138 case the Jacky oilfield side of the fault) and subsequent CO₂ disposal into
 139 an underpressured one (in this case the Beatrice field side of the fault)
 140 would reduce the energy and therefore costs required to run the closed

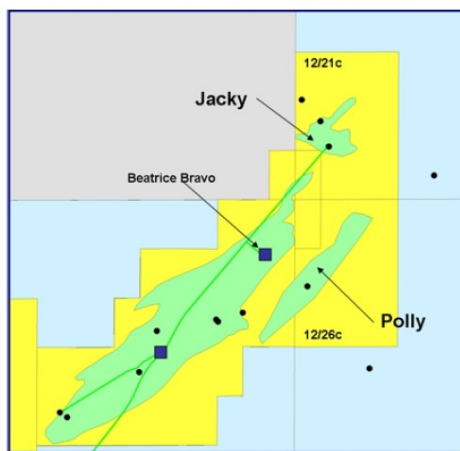

Source: NSE

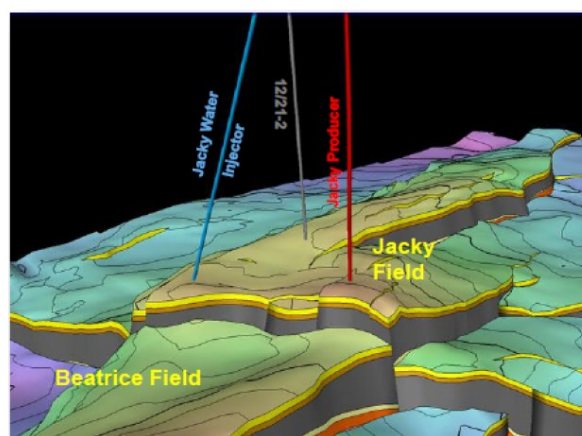

Source: NSE

Figure 4: Left: Map of the Beatrice and Jacky fields with the nearby Polly prospect. Right: 3D model of the Beatrice and Jacky fields showing the fault that separates them along with the 3 Jacky field wells. Adapted from North Sea Energy Inc. (2013)

141 loop system. Hence, the existing relationship between the Beatrice and
142 Jacky oilfields is ideal for this concept, particularly as both fields are
143 located relatively near to shore, and with grid gas and electricity
144 connections. Once the pressure on the overpressured side drops
145 substantially due to brine production, disposal can be switched from the
146 underpressured side for pressure management purposes. In this study we
147 assume that this occurs after two years, which is how long the Jacky field
148 flowed without artificial lift. After this point, we have accounted for the
149 energy required to undertake brine extraction in our calculations.

150 **2. EVALUATING EVIDENCE FOR METHANE SATURATION WITHIN THE OIL FIELDS**

151 For this system to be viable, it is imperative that the extracted brine is
152 saturated with methane. A systematic study of well logs from the Beatrice
153 and Jacky oil fields was performed to ascertain if this was the case for the
154 study site. This focused on the identification of gas trips, background gas
155 levels, and identification of the gas effect in well logs (Figure 5).

156 Alongside this qualitative assessment, saturation calculations using
157 production data were compared with theoretical data from the literature.

158 **2.1 Qualitative assessment**

159 The gas effect (indicating the presence of free gas in pore spaces) was
160 identified in all wells with neutron logs within the oil fields, specifically, six
161 instances in the Mains formation and fifteen in the Beatrice formation.
162 Where neutron logs were not recorded there were a further three gas
163 shows in the Mains formation and three in the Beatrice formation. These

164 gas shows can be accounted by the wells intersecting a portion of the
165 saline formation that are over-saturated with methane.

166 Wells within the Beatrice field exhibited evidence for small amounts of
167 free gas at the top of individual reservoir sands rather than an overall gas
168 cap, strongly implying gas saturation of the brines. Furthermore, no
169 evidence of a gas/oil contact is present in the resistivity logs from the
170 field.

171 Background gas levels of 0.1-0.8% occur in many of the wells with a
172 maximum of 3.45% in well 12/21c-6 in the Jacky field. This is also the
173 case for wells outside of the oilfields. A biogenic origin for gas is
174 suggested in the petroleum geochemistry report for well 12/27-1 as it is
175 dry and isotopically light ($\delta^{13}\text{C} -55\text{‰}$), a similar situation to the Russian
176 (Littke *et al.*, 1999) and Japanese (Marsden, 1979) methane saturated
177 sedimentary basins.

178 Gas shows were also recorded in several wells outside the Beatrice and
179 Jacky oilfields. A gas discovery in the Beatrice formation not associated
180 with oil was found in well 12/27-1, and exhibited a flow rate of 9.5 million
181 standard cubic feet (mmscf)/day ($\sim 270,000 \text{ m}^3/\text{day}$). Wells 11/24a-2 and
182 11/24a-2z recorded background gas levels up to 1.42%, with wells
183 11/30-6, 12/20b-1 and 12/24-2 also recording pronounced gas shows.

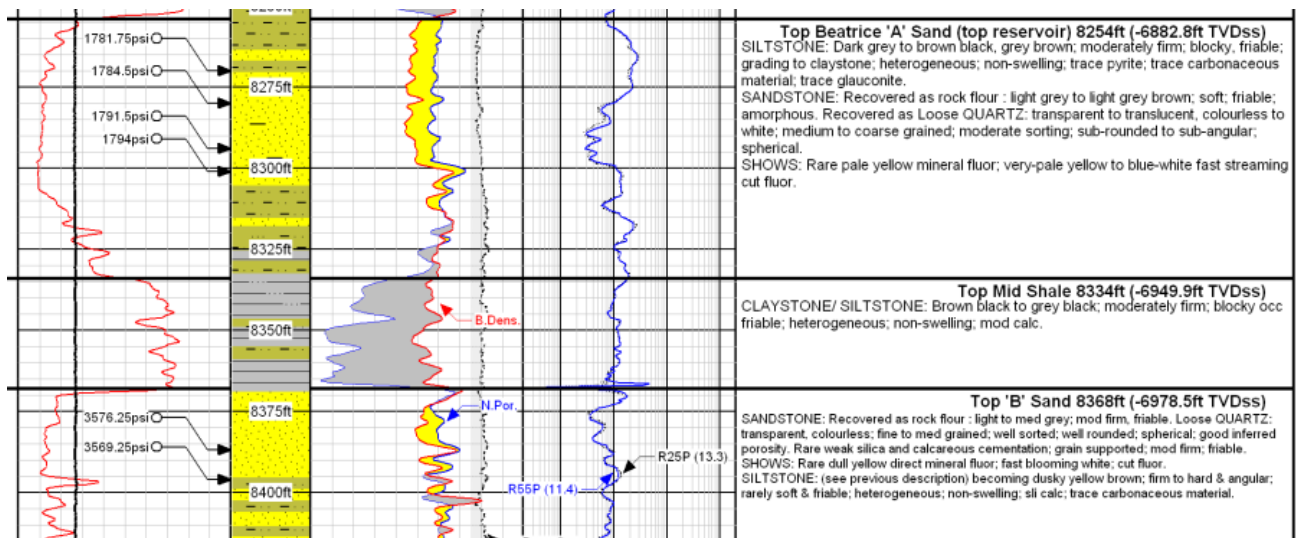


Figure 5: Reservoir section from composite well log for the Jacky field injection well 12/21c-J2 showing large gas effect between 8310ft and 8200ft (area between red and black lines shaded yellow) on the neutron and density logs which are labelled N. Por. and B. Dens. Respectively. Where the gas effect is present the space between the log lines is shaded in yellow. Note the low pressure in A sand after several years of oil production.

184 Unfortunately, the majority of well logs that penetrated the Beatrice
 185 Formation did not record bulk density and neutron data. However, those
 186 that did (mostly within the oil fields) exhibited a clear gas effect (Figure
 187 5). Density/neutron logs recorded outside the oil fields also exhibited the
 188 gas effect in wells 11/29-1 and 12/26c-5. Evidence for the methane
 189 saturation of the Mains Formation is less pronounced, as beyond the
 190 oilfields, little attention was paid to the formation in the well logs.
 191 However, gas shows were recorded in wells 12/26c-5 and 12/27-1 with
 192 large gas effects observed in both wells 12/26c-5 and 11/29-1.

193 Based on the number of positive gas shows, the gas effect, the biogenic
 194 origin, and the large gas discovery, we conclude that methane saturation
 195 of brine is highly probable throughout both the Mains and Beatrice
 196 formations of the Moray Firth basin.

197 **2.2 Methane saturation calculation**

198 To further constrain the methane saturation level of the saline formations
199 within the sedimentary basin, we perform a comparison between the
200 theoretical methane solubility at reservoir conditions and the gas
201 produced during the lifetime of the Beatrice Field, divided by the volume
202 of produced water. Theoretical data from both Duan & Mao (2006) and
203 McGee et al., (1991) imply a methane solubility in brine at the conditions
204 found in the Beatrice and Mains formations of the Moray Firth basin to be
205 ~ 0.1 mol/kg. The data and calculations for the Beatrice field are outlined
206 in Table 1 in the appendix. As calculated in table 1, the theoretical
207 solubility of methane under the conditions of the Beatrice field is ~ 0.1
208 mol/kg. The calculated solubility using the total volume of produced gas
209 divided by the total volume of produced water is 0.23 mol/kg. This
210 calculated solubility from the field production data is clearly above the
211 theoretical level, but within the same order of magnitude, which is to be
212 expected given the uncertainties surrounding both calculations, such as
213 the variation in temperature across the formation and the accuracy of the
214 produced water volumes. Additionally, the figure of 0.23 mol/kg should be
215 taken as a maximum as some of the gas produced may have been in a
216 free gas state, hence the "gas effect" seen in the well logs. These
217 calculations are clearly indicative of methane saturation or over saturation
218 of the formation waters within the Beatrice field.

219 The same approach was used to ascertain the theoretical and calculated
220 methane saturation levels within the Jacky field as outlined in table 2 in
221 the appendix.

222 Within the Jacky field, the theoretical solubility is 0.1 mol/kg and the
223 calculated solubility is 0.60 mol/kg. This is three times higher than the
224 Beatrice field but still within the same order of magnitude as both the
225 calculated and theoretical solubilities. It is probable that more gas may
226 have exsolved from the formation water in this part of the reservoir after
227 several years of production due to the drop in reservoir pressure. This
228 would cause free gas to flow towards the well increasing the gas to water
229 ratio, and again implies that there was free gas in the field, meaning that
230 the formation water is almost certainly fully saturated with respect to
231 methane.

232 **3. ANALYSIS PERFORMED AND METHODS USED**

233 We performed a comparison of three scenarios: gas production only,
234 electricity production from gas only, and a full system with electricity
235 generation and CO₂ dissolution brine storage.

236 An assessment of the volume of water available was used to calculate the
237 size of both the methane resource and the potential mass of CO₂ that
238 could be stored. Using these estimates, an energy balance for each
239 component of the system was calculated, allowing an estimate of the

240 capital and operating costs over the lifetime of the system to be
241 determined.

242 A Monte Carlo simulation was used to produce frequency distributions for
243 each of the scenarios. Base equations used in all scenarios were
244 calculated for the size of the water and methane resources, and expected
245 production. Then the gas production, CO₂ storage, and full system
246 scenarios were calculated.

247 Probability quantiles were calculated for each scenario where the first
248 quantile represents the value where 75% of results equalled or exceeded
249 that value. The second quantile represents the value where 50% of
250 results equalled or exceeded that value, which is the same as the mean
251 value and referred to as such from here on. The third quantile represents
252 the value where 25% of results equalled or exceeded that value.

253 **3.1 ASSESSING THE SIZE OF THE RESOURCE**

254 Essential components of the scenario calculations are ranges of values for
255 the size of the water and methane resources, and expected production
256 volumes. The volume of water in the Mains formation was calculated by
257 combining data from the literature (Richards *et al.*, 1993) and well logs.
258 The areal extent of the Mains formation was taken from the Scottish
259 Centre for Carbon Storage (2009) report which assessed the volume of
260 the formation using its aerial extent and average thickness. The formation
261 is of variable thickness as observed in well logs but minimum and
262 maximum values are provided by Richards *et al.* (1993). These values

263 were combined with an assumption of an even distribution across the
264 areal extent of the formation, due to a lack of further data.

265 The majority of the available porosity data for the Mains formation is from
266 measurement of samples obtained from the Beatrice field, which has an
267 average value of 15%. Outside of the field, well 12/27-1 exhibits a higher
268 average porosity of 23%. The porosity of the Mains formation within the
269 Beatrice oilfield was used with a normal distribution. Based on the
270 findings of Haszeldine et al. (1984), extrapolating reservoir quality
271 outside of the oilfields was justifiable as there was no evidence that
272 porosity was related to oil charge.

273 The net:gross was calculated from well logs and combined with evidence
274 from Richards et al. (1993). A maximum and minimum value with even
275 distribution was used as a model input using this data. This reflects the
276 different proportions of mud and sand in different parts of the formation.

277 Water density values were used for brine with a salinity of 35000 ppm
278 and temperatures of between 75°C and 95°C to account for changes in
279 depth across the formation. The methane solubility in the Beatrice
280 formation and Mains formation brines was calculated using the literature
281 figure from Duan & Mao (2006) of ~0.1 mol/kg, and the figure calculated
282 from Oil & Gas Authority (2017) data from the Beatrice field of 0.23
283 mol/kg. The error of methane solubility was calculated to be +/- 0.05
284 mol/kg.

285 The Jacky field had a much higher calculated figure (0.60 mol/kg) than
286 that of Beatrice. This could be explained by the fact that the field only
287 produced for a short time compared to Beatrice (causing more degassing
288 per unit of water produced), the field only produced from the top sand of
289 the Beatrice Formation, or that there was a significant gas to oil ratio in
290 that field. However, both the Jacky and Beatrice fields had very low gas to
291 oil ratios, so we can confidently rule out that mechanism as a cause of the
292 higher calculated figure (Stevens, 1991a; Ithaca Energy, 2017). Despite
293 ruling out one of the mechanisms, this higher value was not considered
294 for the total methane volume calculation as we cannot rule out the effects
295 of short-term production or isolated production from the reservoir, and it
296 is likely to be higher than the value that would be achieved during longer-
297 term production.

298 The molar volume of an ideal gas at standard temperature and pressure
299 was used to ascertain the volume of produced gas at the surface. The
300 following equation gives the potential size of the methane resource in the
301 Mains formation:

$$302 \quad A \times h \times \phi \times NtG \times \rho_{brine} \times sol_{CH_4} \times 0.0224 \text{ m}^3 \quad [1]$$

303 Where A is areal extent of the Mains formation, h is the thickness of the
304 Mains formation, ϕ is the porosity of the Mains formation, NtG is the
305 net:gross ratio of sand to mud in the Mains formation, ρ_{brine} is the density
306 of the formation brine, sol_{CH_4} is the solubility of methane in brine, and
307 0.0224 m^3 is the molar volume of ideal gas at STP. We use these water

308 volume and methane solubility calculations to determine a range of values
309 for methane per m³ formation water produced.

310 **3.2 Daily well production**

311 Production data from the Jacky oilfield (Oil & Gas Authority, 2017) was
312 used to calculate a range of figures for projected daily water production
313 per well. The Jacky field was used for two reasons, firstly, as it produced
314 from an over pressured section of the basin and secondly, as it possessed
315 only one production well, as opposed to more than thirty present in the
316 Beatrice field. The total production of liquids (oil and water) were divided
317 by the number of days of production over the field's lifetime. The Jacky
318 field has produced between 1300 and 1600 m³ of brine and oil per day in
319 the first two years of its operation (Oil & Gas Authority 2017). We use
320 these as maximum and minimum figures and assume that the well
321 lifetime is the same as the project lifetime: 30 years. This is in line with
322 the 34 year lifetime of production from the Beatrice field.

323 **3.3 GAS PRODUCTION SCENARIO**

324 The well production and dissolved methane concentration values were
325 used to produce values for gas production volumes per m³ brine that is
326 brought to the surface and degassed. As the solubility of methane is
327 negligible at surface conditions (Ganjdanesh and Hosseini, 2016) we
328 assume a 100% recovery rate from the brine. This is not to say that
329 100% of the resource present in the formation is recoverable, only that all
330 of the gas contained within the extracted brine is degassed from it. This

331 was then converted into monetary terms via conversion to kWh. Gross
332 monetary value was calculated using the real cost of wholesale gas in the
333 UK corrected to April 2017 prices using data from Ofgem (2017b) and The
334 Office for National Statistics (2017). The maximum and minimum gas
335 prices from the 2010-2017 period were used under the assumption that
336 future gas prices will be similar.

337 Known per barrel cost of oil production from the Jacky field (Edison
338 Investment Research, 2009) was converted to a per m³ figure for total
339 produced liquids (both oil and water) of £5.74₂₀₁₇ and subtracted to give a
340 net monetary value. Combining this cost with the amount of gas produced
341 per m³ of water provided the cost per m³ gas. It is worth noting that this
342 price per barrel figure is for oil and takes into account the exploration,
343 development, and production costs. It is extremely likely that these will
344 be considerably lower for a brine production system using existing
345 infrastructure, but we use the oil production cost figure due to a lack of
346 other available cost estimates.

347 **3.4 ELECTRICITY PRODUCTION SCENARIO**

348 Assumption of complete combustion of methane in a modern CCGT
349 (combined cycle gas turbine) with an efficiency of 58.3% (Aminov *et al.*,
350 2016) was used to calculate electricity production:

$$351 \quad kWh_{gas} m^{-3}_{brine} \times e_{CCGT} \quad [2]$$

352 Where $kWh_{gas}m^{-3}_{brine}$ is the energy equivalent of gas per cubic metre of
353 brine, and e_{CCGT} is the efficiency of a CCGT.

354 In monetary terms, we can calculate what this power generation is worth
355 using an inflation adjusted average price for electricity from wholesale
356 electricity price data from Ofgem (2017) and historic consumer price
357 index data from the Office for National Statistics (2017). As previously,
358 the maximum and minimum electricity prices from the 2010-2017 period
359 were used under the assumption that electricity prices over the next
360 decade will not be significantly lower or higher.

361 **3.4.1 CO₂ Volume**

362 The potential storage volume of CO₂ dissolved in brine in the Beatrice
363 oilfield was calculated using the production volumes of oil from the field
364 along with the formation volume factor and CO₂ solubility data from
365 Rochelle & Moore (2002) and Bando et al. (2003). This assumes that the
366 produced oil can be replaced entirely by CO₂ saturated water.

$$367 \rho_{brine} \times M(CO_2) \times sol_{CO_2} \times V \quad [3]$$

368 Where ρ_{brine} is the brine density, $M(CO_2)$ is the molar mass of CO₂, sol_{CO_2} is
369 the CO₂ solubility in brine, and V is the volume of water in the Mains
370 formation.

371 The storage capacity of the Mains formation is considered to be the
372 amount of CO₂ that can be dissolved in the total volume of formation

373 water. This assumes that as water is produced and reinjected into the
374 formation its pressure does not change.

375 However, a more realistic scenario is to calculate the amount of CO₂
376 storage per m³ of formation water as not all water is likely to be
377 accessible:

$$378 \rho_{brine} \times M(CO_2) \times sol_{CO_2} \quad [4]$$

379 Where ρ_{brine} is the brine density, $M(CO_2)$ is the molar mass of CO₂, and
380 sol_{CO_2} is the CO₂ solubility in brine.

381 This figure can then be used to ascertain the amount of extra space
382 available for additional CO₂ from outside the system.

383 **3.4.2 Injection/extraction costs**

384 The injection wellhead pressure used was 11.5 MPa as this figure covers
385 the minimum injection pressure required for the Beatrice field and that
386 required for pressure maintenance within the Mains formation.

387 Assuming a pump efficiency of 0.8 (Ganjdanesh and Hosseini, 2016) the
388 energy requirement can be calculated using equation 5, from Burton &
389 Bryant (2009)

$$390 W_{inj} = \frac{q_{brine} \times P_{mixing}}{\eta_{pump}} \quad [5]$$

391 Where q_{brine} is the brine flow rate (equal to production rate), P_{mixing} is the
392 mixing pressure, and η_{pump} is the pump efficiency. As we have taken a

393 pessimistic figure for injection wellhead pressure, we can also assume this
394 equation is the same as the maximum extraction energy.

395 **3.5 FULL CLOSED-LOOP SYSTEM WITH GEOTHERMAL AND CAPTURE SCENARIO**

396 **3.5.1 Carbon capture cost**

397 The mass of brine required to provide enough energy to capture 1 kg of
398 CO₂ can be calculated using the following assumptions: (i) That the
399 ammonia capture process captures 90% of carbon dioxide from methane
400 combustion (Gazzani, Sutter and Mazzotti, 2014). (ii) Using the chilled
401 ammonia process as the maximum and the ammonia with organic solvent
402 process as the minimum energy requirement. (iii) The Ammonia
403 regeneration temperature is less than 70°C and requires cooling water of
404 20°C or less (Novek *et al.*, 2016). Water temperatures in the Moray Firth
405 are 6-10°C year round (Skjoldal, 2007) and so seawater can be used for
406 cooling purposes. As we assume complete combustion of methane, there
407 is a 1:1 ratio of mols methane to mols CO₂ and therefore we can use the
408 methane volume per m³ brine in the equation, corrected for 90% capture
409 efficiency:

$$410 \quad V_{gas} m^{-3}_{brine} \times \rho_{CO_2} \times E_{amm.} \times \eta_{cap.} \quad [6]$$

411 Where $V_{gas} m^{-3}_{brine}$ is the volume of gas per cubic metre of brine, ρ_{CO_2} is the
412 CO₂ density, $E_{amm.}$ is the ammonia carbon capture cost, and $\eta_{cap.}$ is the
413 capture efficiency.

414

415

416 **3.5.2 Mixing tank cost**

417 The energy cost of compression to dissolve the CO₂ into the brine prior to
418 injection is given by the following equation from Burton & Bryant (2009)

$$419 \quad W_{CO_2} = \frac{SN_{CO_2}nRT_1}{(n-1)} \left[\left(\frac{p_x}{p_1} \right)^{n-1/n} - 1 \right] \quad [7]$$

420 Where S is the number of stages, N_{CO_2} is the mols per kg of CO₂, n is the
421 polytropic coefficient, R is the gas constant, T_1 is the inlet temperature, p_x
422 is an intermediate stage pressure, and p_1 is the inlet pressure.

423

424 **3.5.3 Geothermal energy**

425 Using the geothermal gradients calculated by Argent et al. (2002) for
426 wells 21/23-1 and 12/24-2 of 29.7 °C/km and 32.4 °C/km respectively
427 (both +6 °C for average sea bottom temperature) we find that the lowest
428 temperature for the Mains formation is in well 11/30aA18 at 65 °C. The
429 maximum temperature is found in well 11/25-1 where the base of the
430 Mains formation would be 110 °C using the higher gradient. Assuming an
431 error margin of ±5 °C, the minimum and maximum used are 60 °C and
432 115 °C respectively. The 115 °C value was extrapolated from a graph of
433 the existing data up to 110 °C from Clarke & Glew (1985). Using the
434 energy calculations in table 4 in the appendix, we can calculate the
435 geothermal energy that could be produced per unit volume in the brine:

$$436 \quad kWh_{therm.} \cdot kg^{-1}_{brine} \times \rho_{brine} \quad [8]$$

437 Where $kWh_{therm. kg^{-1} brine}$ is the geothermal energy per kg of brine, and
438 ρ_{brine} is the brine density.

439 **3.5.4 Calculating Net energy balance**

440 This study assumes a project lifetime of thirty years with a free flowing
441 well for the first two years, as was the case in the Jacky field. The thermal
442 energy extracted from the brine can only be used for the capture process
443 and is assumed to cover that energy requirement. The electrical energy
444 balance for the first two years is given as:

$$445 (kWh_{gas} m^{-3} brine \times e_{CCGT} \times q_{brine}) - q_{brine}(W_{CO_2} \times m_{CO_2} + W_{inj}) [9]$$

446 And for subsequent years:

$$447 (kWh_{gas} m^{-3} brine \times e_{CCGT} \times q_{brine}) - (W_{CO_2} + 2W_{inj} \times q_{brine}) [10]$$

448 Where $kWh_{gas} m^{-3} brine$ is the energy equivalent of gas per cubic metre of
449 brine, e_{CCGT} is the efficiency of a CCGT, q_{brine} is the brine flow rate, W_{CO_2} is
450 the mixing tank energy requirement, and W_{inj} is the injection/extraction
451 energy requirement.

452 The net energy balance can then be assigned a monetary value using the
453 inflation adjusted average price for electricity.

454

455 **3.5.5 CAPEX, OPEX and decommissioning costs**

456 No reliable figures are available for individual wells but the consensus in
457 the literature is that drilling and completing a North Sea oil well costs
458 upwards of £10 million. One 2014 opinion piece stated a cost of between

459 £15 and £40 million (MacDonald, 2014). This considerable cost in drilling
460 and completion makes a strong case for re-use of existing wells for CCS
461 activities where possible.

462 In this study it is assumed that the per barrel production cost from Edison
463 Investment Research (2009) includes the drilling of the wells at the Jacky
464 site as well as the OPEX of the production platforms. Using the average
465 figure of 40% for production costs per barrel of oil in the UK (The Wall
466 Street Journal, 2016), we calculate an OPEX figure of £2.30 in 2017
467 money per m³ brine produced.

468 CCGT units cost around £10 million for a 17.3 MW model (Welander,
469 2000). Estimates of the cost of a post combustion capture system for gas
470 range from a low(p80) of 813 £₂₀₁₃/kW to a high(p20) 964 £₂₀₁₃/kW
471 (DECC and Mott MacDonald, 2012) (£885.45 and £1,049.91 in 2017
472 money). Hence, CO₂ capture costs from a 17.2 MW CCGT that equate to
473 between 15.2 and 17.2 £million (2017 monetary values).

474 According to Oil & Gas UK (2012), average costs for plugging and
475 abandonment of platform wells is £2.9 million, subsea exploration and
476 appraisal wells are £3.5 million, and over £15 million for a subsea
477 production well. Topsides cost £4200 per tonne and jackets cost £3100
478 per tonne. This does not include disposal costs or pipeline removal costs.

479 Using these cost estimates, we calculate that decommissioning of the
480 infrastructure associated with the Jacky field (two platform wells and a
481 subsea exploration well, along with 663 tonnes of topside and 950 tonnes

482 of jacket (Ithaca Energy, 2017)) would cost a minimum of £15 million. In
483 addition, there are also several subsea modules, pipelines, and cuttings
484 piles that would need to be removed which would increase
485 decommissioning costs further. Unfortunately, more detailed estimates of
486 the costs of total decommissioning are not available from the current
487 operator due to commercial sensitivity.

488

489 Using the same Oil and Gas UK estimates, decommissioning of the he
490 infrastructure at the Beatrice field (21,773 tonnes of topsides and 13,886
491 tonnes of jackets across 6 installations, along with 43 platform wells
492 (Repsol Sinopec, 2018)) would cost around £260 million. As with the
493 Jacky field, more specific cost estimates for site specific decommissioning
494 are not available from the current operator due to commercial sensitivity.
495 However, in the case of both fields the significant costs of
496 decommissioning provide a strong case to delay it for as long as possible
497 and invest in re-use of the infrastructure, particularly if it can result in
498 further revenue generation which can be used to assist in offsetting future
499 decommissioning costs.

500

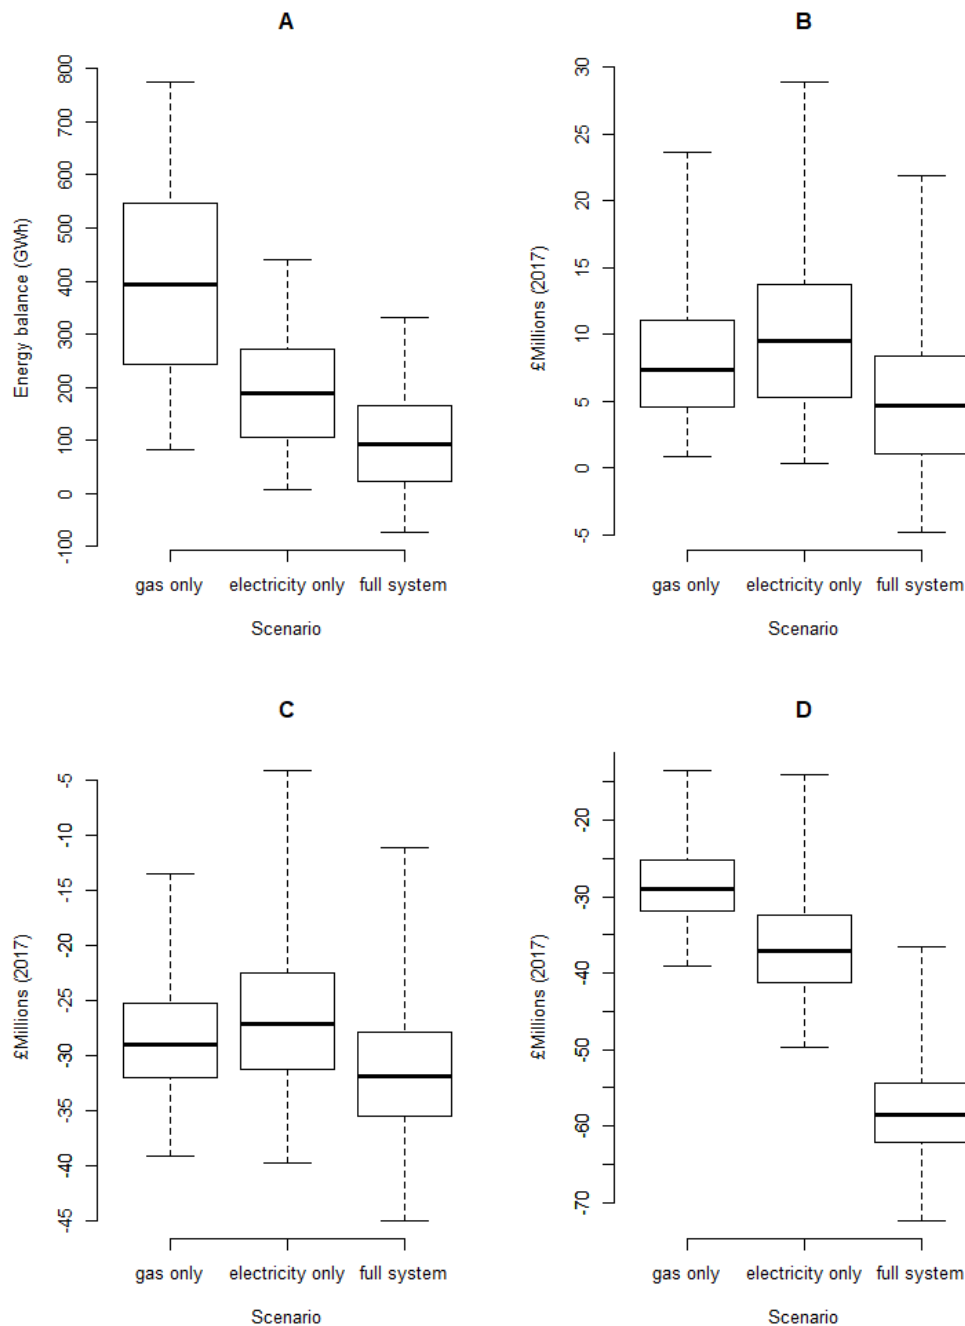


Figure 6: A - Full 30 year project energy balance for gas, electricity, and full system scenarios; B - Full 30 year project revenue balance; C - Full 30 year project revenue balance including full field exploration and maximum development costs (based on the Jacky field), D - Full 30 year project revenue balance including OPEX costs (based on the Jacky field) plus CAPEX costs for CCGT and carbon capture. White boxes extend to the 25th and 75th percentiles, bold horizontal lines within boxes represent the median value, whiskers extend to the full range of values

502 Table of results is in appendix 1 (Table 5).

503 **5. DISCUSSION**

504 The size of the resource is significant when compared to yearly gas
505 consumption in the UK. Our calculations show that the total gas resource
506 ranges from between 3.7 TWh and 1000 TWh. The total UK gas demand
507 for 2017 was ~875 TWh (Halliwell and Lucking, 2017). The mean
508 resource was calculated as 155 TWh which would cover ~18 % of this
509 assuming similar levels of demand in future years.

510 The costs of this system are in the tens of millions, however building a
511 carbon storage site from scratch would cost in the hundreds of millions
512 (Shell UK, 2016). Decommissioning also runs into the hundreds of millions
513 and so reuse of infrastructure in this way provides a cheaper way of
514 getting a large-scale carbon storage industry started.

515 The storage potential for dissolved CO₂ in the formation is an order of
516 magnitude greater than the amount generated within the system from
517 methane extraction and CO₂ capture. The generated CO₂ only accounts
518 for between ~3 and ~10 % of the available storage space. This opens up
519 such a scheme to disposal of externally produced CO₂, which given the EU
520 emissions trading scheme carbon price could also be monetised.

521 Assuming a price of between £10 and £30 (2017 money) per tonne, this
522 could add up to between £7 million and £40 million in revenue. A carbon
523 credit for emissions avoidance of £10 would also add between £0.3 million
524 and £1.8 million over the lifetime of the project. Given the current desire
525 to reach net-zero in developed nations close to 2050, it is highly probable

526 that these CO₂ reduction incentives will increase and hence these
527 additional revenue estimates can be taken as minimum values.

528 Whilst this study shows that co-production of methane, brine and
529 geothermal energy is potentially viable at the chosen site, the area
530 selected is not ideal, as it is not the onshore deep, hot (>100°C),
531 overpressured aquifers considered by Ganjdanesh *et al.* (2014). However,
532 as our work shows that such a co-production scheme in a sub-optimal
533 location is a better option than immediate decommissioning, other North
534 Sea locations with higher pressure regimes and hotter aquifers have the
535 potential to generate significant profit. This is especially the case where
536 greater geothermal energy potential could be used to generate electricity,
537 rather than solely be used in the carbon capture process.

538 This study has shown that the reuse of existing infrastructure for a low
539 carbon CO₂ disposal site is worth serious consideration. The North Sea
540 contains a significant amount of infrastructure earmarked for
541 decommissioning in the near future, but re-use could be the key to
542 helping to overcome the financial barriers currently in place preventing
543 development of a large-scale carbon storage industry.

544 Whilst the Mains formation capacity estimate is somewhat uncertain as it
545 is based on estimated volumes, the capacity estimate for the depleted
546 Beatrice field is much higher confidence due to accurate production
547 figures. The Beatrice field has the potential to store between 18 and 26
548 Mt (megatonnes) of CO₂ without the risk of leakage as the CO₂ saturated

549 brine is denser than the native brine and will tend to sink, unlike
550 supercritical CO₂ that remains buoyant in the subsurface.

551 Recent work has illustrated that production of brine from a North Sea
552 saline formation can significantly increase the potential storage capacity
553 of the Captain sandstone formation and assist in pressure management
554 during the lifetime of the site (Jin *et al.*, 2012). Our study has shown that
555 the addition of gas and geothermal energy production could help to
556 reduce running costs during brine production operations. Economies of
557 scale could be introduced where several platforms could feed gas to a
558 central power generation hub. As the only necessities for this system are
559 a depleted, underpressured field and an overpressured aquifer there are
560 many other potential options available in the North Sea currently
561 accessible through existing infrastructure. If decommissioning is allowed
562 to continue without consideration of such reuse of the existing
563 infrastructure then these opportunities will be lost and CCS in the North
564 Sea will be considerably more expensive.

565

566 **6. CONCLUSIONS**

567 Here we show that the potential methane saturated brine resource in the
568 Mains formation is significant when compared to UK gas demand.

569 However, production of brine gas alone from the Mains formation is
570 unlikely to be commercially viable, even if used to generate and sell
571 electricity.

572 However, if brine is being produced for pressure management or for
573 dissolution CO₂ storage, then electricity generation can provide some of
574 the energy requirements for running the system. Producing geothermal
575 energy alongside the gas with electricity production can cover the energy
576 costs of a closed loop dissolved carbon storage facility offshore with its
577 own carbon capture unit. Hence, this system has the potential to run off
578 low carbon energy generated on site.

579 Furthermore, the likely amounts of produced CO₂ by this system would
580 not fully saturate the produced brine. This opens up the potential of
581 importing CO₂ from external sources for storage. This could provide
582 additional income depending on the carbon price and help overcome
583 financial barriers for new carbon storage sites.

584 Hence, we find that a viable system could build upon existing
585 infrastructure in the UK North Sea, a mature basin with large numbers of
586 platforms and depleted fields. This would be an order of magnitude less
587 expensive than current plans to decommission all UK North Sea

588 infrastructure and could help to open up the UK North Sea to a world

589 leading large-scale carbon storage industry.

590

591

7. APPENDIX

592

Table 1: Calculation of actual solubility of methane in Beatrice oil field

Produced Water Properties	Figure	Unit	Notes
Density of produced water	9.98E+02	kg/m ³	Assuming 35000ppm chlorides and 80°C using online calculator (CSG Network, University of Michigan and NOAA, 2011)
Volume of produced water	1.27E+08	m ³	(Oil & Gas Authority, 2017)
Mass of produced water	1.26E+11	kg	Volume of produced water × density of produced water
Methane Properties			
Volume methane produced	7.20E+08	m ³	(Oil & Gas Authority, 2017)
Density of methane at 1.013 bar and 25C	6.57E-01	kg/m ³	(Air Liquide, 2018)
Mass of methane produced	4.73E+08	kg	Volume methane produced × Density of methane at 1.013 bar and 25C
Molecular weight	1.60E+01	g/mol	(Air Liquide, 2018)
	1.60E-02	kg/mol	
Solubility Calculation			
Mols gas produced	2.95E+10	mol	Mass methane/molecular weight
Methane solubility in Beatrice field	2.33E-01	mol/kg	Mols gas produced/mass of produced water
	0.23	mol/kg	to 2 significant figures

593

594

595

596

597

598

599

600

Table 2: Calculation of actual solubility of methane in Jacky oil field

Produced Water Properties	Figure	Unit	Notes
Density of produced water	9.95E+02	kg/m3	Assuming 35000ppm chlorides and 85°C using online calculator (CSG Network, University of Michigan and NOAA, 2011)
Volume of produced water	1.70E+06	m3	(Oil & Gas Authority, 2017)
Mass of produced water	1.69E+09	kg	Volume of produced water* Mass of produced water
Methane Properties			
Volume methane produced	2.48E+07	m3	(Oil & Gas Authority, 2017)
Density of methane at 1.013 bar and 25C	6.57E-01	kg/m3	(Air Liquide, 2018)
Mass of methane produced	1.63E+07	kg	Volume methane produced* Density of methane at 1.013 bar and 25C
Molecular weight	1.60E+01	g/mol	(Air Liquide, 2018)
	1.60E-02	kg/mol	
Solubility Calculation			
Mols gas produced	1.02E+09	mol	mass methane/molecular weight
Methane solubility in Jacky field	6.01E-01	mol/kg	mols gas produced/mass of produced water
	0.60	mol/kg	to 2 significant figures

601

602

Table 3: A comparison of the two chilled ammonia carbon capture processes, their energy

603

requirements, and the equivalent mass of brine required to provide the required geothermal

604 energy at different brine temperatures. Masses were calculated from the data in table 4 **Error!**

605 **Reference source not found..**

606

Process	Energy cost MJ/kg CO ₂	kg brine required at 60 °C	kg brine required at 70 °C	kg brine required at 80 °C	kg brine required at 90 °C	Source
Chilled Ammonia	2.43	120.2	100.0	85.6	74.7	(Sutter, Gazzani and Mazzotti, 2016)
Ammonia + organic solvent	1.39	68.7	57.2	49.0	42.8	(Novek <i>et al.</i> , 2016)

607 Table 4: Energy release from cooling hot brine (35000ppm) to 10 °C; calculated from Clarke &

608 Glew (1985). The value for 115 °C was extrapolated from the rest of the data.

Molality	Initial temp . (°C)	Specific Heat Capacity (j/kg.k)	Change in Temp (°C)	Mas s (kg)	Energy released (j)	Energy released (MJ -2 significant figures)
0.6	60	4044.3	50	1	202217	0.20
0.6	70	4049.1	60	1	242944.2	0.24
0.6	80	4055.4	70	1	283878	0.28
0.6	90	4063.6	80	1	325089.6	0.33
0.6	100	4073.9	90	1	366647.4	0.37
0.6	110	4088.8	100	1	408877	0.41
0.6	115	-	105	1	413900	0.41

609

610

611 Table 5: Results of the Monte Carlo analysis

GAS RESOURCE (TWh)						
TWh gas in Mains formation						
	Min	1st Quantile	Median	Mean	3rd Quantile	Max
	3.7	68	120	155	210	1000
CO2 STORAGE CAPACITIES (kg)						
CO2 storage potential of mains fm.						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	2.23E+10	2.09E+11	3.42E+11	4.03E+11	5.44E+11	2.00E+12
CO2 storage potential of Beatrice oil field						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	1.83E+09	2.04E+09	2.23E+09	2.23E+09	2.43E+09	2.64E+09
Excess CO2 capacity per m3 brine						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	1.90E+00	3.80E+00	5.60E+00	5.60E+00	7.50E+00	9.40E+00
ENERGY PRODUCTION (kWh)						
total produced gas						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	1.37E+08	3.02E+08	4.54E+08	4.55E+08	6.05E+08	8.40E+08
total produced electricity						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	6.90E+07	1.66E+08	2.49E+08	2.51E+08	3.32E+08	4.97E+08
total produced thermal energy						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	7.93E+08	1.11E+09	1.35E+09	1.35E+09	1.58E+09	2.00E+09
ENERGY BALANCES (kWh)						
gas scenario energy balance						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	8.34E+07	2.43E+08	3.95E+08	3.96E+08	5.46E+08	7.75E+08
electricity scenario energy balance						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	6.98E+06	1.07E+08	1.90E+08	1.91E+08	2.73E+08	4.41E+08

full system energy balance						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	-7.52E+07	2.17E+07	9.45E+07	9.61E+07	1.66E+08	3.34E+08
lifetime project energy costs						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	1.20E+08	1.43E+08	1.54E+08	1.55E+08	1.65E+08	1.94E+08
REVENUE BALANCES (£millions, 2017)						
gas scenario revenue						
	Min.	1 st Qu.	Median	Mean	3 rd Qu.	Max.
	8.48E-01	4.24E+00	7.35E+00	8.11E+00	1.10E+01	2.36E+01
electricity scenario revenue						
	Min.	1 st Qu.	Median	Mean	3 rd Qu.	Max.
	3.12E-01	5.32E+00	9.46E+00	9.88E+00	1.38E+01	2.89E+01
full system scenario revenue						
	Min.	1 st Qu.	Median	Mean	3 rd Qu.	Max.
	-4.82E+00	1.09E+00	4.69E+00	4.95E+00	8.35E+00	2.18E+01
REVENUE BALANCES INCLUDING FIELD OPEX (£millions, 2017)						
gas scenario revenue balance						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	-3.91E+01	-3.19E+01	-2.89E+01	-2.84E+01	-2.52E+01	-1.35E+01
electricity scenario revenue balance						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	-3.97E+01	-3.12E+01	-2.71E+01	-2.66E+01	-2.25E+01	-4.12E+00
full system revenue balance						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	-4.50E+01	-3.55E+01	-3.18E+01	-3.16E+01	-2.78E+01	-1.11E+01
REVENUE BALANCES INCLUDING FIELD OPEX & CAPEX (£millions, 2017)						
gas scenario revenue balance						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	-3.91E+01	-3.19E+01	-2.89E+01	-2.84E+01	-2.52E+01	-1.35E+01

electricity scenario revenue balance						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	-4.97E+01	-4.12E+01	-3.71E+01	-3.66E+01	-3.25E+01	-1.41E+01
full system scenario revenue balance						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	-7.24E+01	-6.22E+01	-5.85E+01	-5.82E+01	-5.44E+01	-3.65E+01
EXTRA SPACE SALES AND CARBON AVOIDANCE (£millions, 2017)						
extra space CO2 sales						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	7.83E+00	1.60E+01	2.13E+01	2.17E+01	2.68E+01	4.30E+01
CO2 avoidance payments						
	Min.	1st Qu.	Median	Mean	3rd Qu.	Max.
	2.97E-01	6.59E-01	9.88E-01	9.93E-01	1.32E+00	1.83E+00

612

613 **8. REFERENCES**

614 Air Liquide (2018) 'Methane - Physical Properties', *Gas Encyclopedia*.

615 Available at: <https://encyclopedia.airliquide.com/methane> (Accessed: 24
616 May 2018).

617 Alcalde, J. *et al.* (2018) 'Estimating geological CO2 storage security to
618 deliver on climate mitigation', *Nature Communications*, 9(1). doi:
619 10.1038/s41467-018-04423-1.

620 Aminov, Z. *et al.* (2016) 'Evaluation of the energy efficiency of combined
621 cycle gas turbine. Case study of Tashkent thermal power plant,
622 Uzbekistan', *Applied Thermal Engineering*. Elsevier Ltd, 103, pp. 501–509.
623 doi: 10.1016/j.applthermaleng.2016.03.158.

624 Argent, J. D. *et al.* (2002) 'Heterogeneous exhumation in the Inner Moray
625 Firth, UK North Sea: constraints from new AFTA® and seismic data',

626 *Journal of the Geological Society*, 159(6), pp. 715–729. doi:
627 10.1144/0016-764901-141.

628 Azar, C., Johansson, D. J. A. and Mattsson, N. (2013) 'Meeting global
629 temperature targets - The role of bioenergy with carbon capture and
630 storage', *Environmental Research Letters*, 8(3). doi: 10.1088/1748-
631 9326/8/3/034004.

632 Bando, S. *et al.* (2003) 'Solubility of CO₂ in aqueous solutions of NaCl at
633 (30 to 60)°C and (10 to 20) MPa', *Journal of Chemical and Engineering*
634 *Data*, 48(3), pp. 576–579. doi: 10.1021/je0255832.

635 Bryant, S. L. (2013) 'The One-Stop Carbon Solution', *Scientific American*.
636 Nature Publishing Group, 309(5).

637 Bryant, S. L. and Pope, G. A. (2015) 'Storing carbon dioxide and
638 producing methane and geothermal energy from deep saline aquifers', pp.
639 1–10.

640 Burton, M. and Bryant, S. L. (2009) 'Eliminating Buoyant Migration of
641 Sequestered CO₂ Through Surface Dissolution : Implementation Costs and
642 Technical Challenges', *SPE Reserv. Eval. Eng.*, 12(June), pp. 399–407.
643 doi: 10.2118/110650-PA.

644 Clarke, E. C. W. and Glew, D. N. (1985a) 'Evaluation of the
645 Thermodynamic Functions for Aqueous Sodium Chloride from Equilibrium
646 and Calorimetric Measurements below 154 C', *Journal of Physical and*
647 *Chemical Reference Data*, 14(2), pp. 489–610. doi: 10.1063/1.555730.

648 Clarke, E. C. W. and Glew, D. N. (1985b) 'Evaluation of the
649 Thermodynamics Functions for Aqueous Sodium Chloride from Equilibrium
650 and Calorimetric Measurements below 154C', *Journal of Physics and
651 Chemistry Reference Data*, pp. 489–610. doi:
652 <http://dx.doi.org/10.1063/1.555730>.

653 CSG Network, University of Michigan and NOAA (2011) 'Water Density
654 Calculator'. Available at: <http://www.csgnetwork.com/h2odenscalc.html>.

655 DECC and Mott MacDonald (2012) 'Potential cost reductions in CCS in the
656 power sector', (May), p. 94. Available at:
657 [https://hub.globalccsinstitute.com/sites/default/files/publications/47086/
658 deccpotentialcostreductionsinccs.pdf](https://hub.globalccsinstitute.com/sites/default/files/publications/47086/deccpotentialcostreductionsinccs.pdf).

659 Duan, Z. and Mao, S. (2006) 'A thermodynamic model for calculating
660 methane solubility, density and gas phase composition of methane-
661 bearing aqueous fluids from 273 to 523 K and from 1 to 2000 bar',
662 *Geochimica et Cosmochimica Acta*, 70(13), pp. 3369–3386. doi:
663 10.1016/j.gca.2006.03.018.

664 Edison Investment Research (2009) *Outlook: Ithaca Energy*.

665 Ganjdanesh, R. *et al.* (2014) 'Integrating carbon capture and storage with
666 energy production from saline aquifers: A strategy to offset the energy
667 cost of CCS', *Energy Procedia*. Elsevier B.V., 63, pp. 7349–7358. doi:
668 10.1016/j.egypro.2014.11.771.

669 Ganjdanesh, R. and Hosseini, S. A. (2016) 'Potential assessment of

670 methane and heat production from geopressured–geothermal aquifers’,
671 *Geothermal Energy*. Springer Berlin Heidelberg, 4(1), p. 16. doi:
672 10.1186/s40517-016-0058-4.

673 Gazzani, M., Sutter, D. and Mazzotti, M. M. (2014) ‘Improving the
674 efficiency of a chilled ammonia CO₂ capture plant through solid
675 formation: A thermodynamic analysis’, *Energy Procedia*. Elsevier B.V., 63,
676 pp. 1084–1090. doi: 10.1016/j.egypro.2014.11.116.

677 Halliwell, J. and Lucking, B. (2017) ‘Gas production, trade and demand’,
678 in, pp. 40–48. Available at:
679 <https://www.gov.uk/government/statistics/gas-section-4-energy-trends>.

680 Haszeldine, R. S., Samson, I. M. and Cornford, C. (1984) ‘Quartz
681 diagenesis and convective fluid movement: Beatrice Oilfield, UK. North
682 Sea’, *Clay Minerals*, 19, pp. 391–402.

683 IEA (2014) *World Energy Outlook, 2014*, International Energy Agency.

684 IEA (2015) ‘Storing CO₂ through enhanced oil recovery’, *International*
685 *Energy Agency, Paris, France*. Available at:
686 http://www.iea.org/publications/insights/insightpublications/Storing_CO2
687 [_through_Enhanced_Oil_Recovery.pdf%5Cnhttp://www.iea.org/publicatio](http://www.iea.org/publications/insights/insightpublications/CO2EOR_3Nov2015.pdf)
688 [ns/insights/insightpublications/CO2EOR_3Nov2015.pdf](http://www.iea.org/publications/insights/insightpublications/CO2EOR_3Nov2015.pdf).

689 IPCC (2014) *Fifth Assessment Report (AR5), Climate Change 2014:*
690 *Synthesis Report. Contribution of Working Groups I, II and III to the Fifth*
691 *Assessment Report of the Intergovernmental Panel on Climate Change*.

692 doi: 10.1017/CBO9781107415324.

693 Ithaca Energy (2009) *12/21c-J2 Wellsite Geology EOWR*.

694 Ithaca Energy (2017) *Decommissioning Programmes Draft for*
695 *Consultation: Jacky Wellhead Platform Subsea Installation and Associated*
696 *Pipelines*.

697 Jin, M. *et al.* (2012) *Evaluation of the CO₂ Storage Capacity of the*
698 *Captain Sandstone Formation*. doi: 10.2118/154539-MS.

699 Littke, R. *et al.* (1999) 'Gas generation and accumulation in the West
700 Siberian basin', *AAPG Bulletin*, 83(10), pp. 1642–1665. doi:
701 10.1306/E4FD4233-1732-11D7-8645000102C1865D.

702 MacDonald, D. (2014) *Opinion: Unconventional hydrocarbons in the North*
703 *Sea? - News for the Oil and Gas Sector, Energy Voice*.

704 Mankin, C. J. (1983) 'Unconventional Sources of Natural Gas', *Annual*
705 *Review of Energy*, 8(1), pp. 27–43.

706 Marsden, S. S. J. (1979) 'Natural Gas Dissolved in Brine - A Major Energy
707 Resource of Japan', in *54th Annual Fall Technical Conference and*
708 *Exhibition of the Society of Petroleum Engineers of AIME, Las Vegas, 23-*
709 *26th September 1979*, p. 7.

710 Novek, E. J. *et al.* (2016) 'Low-Temperature Carbon Capture Using
711 Aqueous Ammonia and Organic Solvents', *Environmental Science &*
712 *Technology Letters*, 3(8), pp. 291–296. doi: 10.1021/acs.estlett.6b00253.

713 Office for National Statistics (2017) 'Time series: CPIH All Items Index:
714 2015=100', *Office for National Statistics Website*.

715 Ofgem (2017a) 'Electricity prices: Day-ahead baseload contracts –
716 monthly average (GB)', *Ofgem*. Available at:
717 [https://www.ofgem.gov.uk/chart/electricity-prices-day-ahead-baseload-](https://www.ofgem.gov.uk/chart/electricity-prices-day-ahead-baseload-contracts-monthly-average-gb)
718 [contracts-monthly-average-gb](https://www.ofgem.gov.uk/chart/electricity-prices-day-ahead-baseload-contracts-monthly-average-gb) (Accessed: 22 July 2017).

719 Ofgem (2017b) 'Gas prices: Day-ahead contracts – monthly average
720 (GB)', *Ofgem*.

721 Oil & Gas Authority (2017) 'Production Data', *Data Centre*. Available at:
722 [https://www.ogauthority.co.uk/data-centre/data-downloads-and-](https://www.ogauthority.co.uk/data-centre/data-downloads-and-publications/production-data/)
723 [publications/production-data/](https://www.ogauthority.co.uk/data-centre/data-downloads-and-publications/production-data/) (Accessed: 20 June 2017).

724 Oil & Gas Authority (2018) *Gas-to-Wire: UK SNS & EIS*.

725 Richards, P. C. *et al.* (1993) 'Jurassic of the Central and Northern North
726 Sea', *Lithostratigraphic Nomenclature of the UK North Sea*, p. 252.

727 Rochelle, C. a. and Moore, Y. a. (2002) *The solubility of supercritical CO2*
728 *into pure water and synthetic Utsira porewater, British Geological Survey*
729 *Commissioned Report CR/02/052*.

730 Scott, V. *et al.* (2013) 'Last chance for carbon capture and storage',
731 *Nature Climate Change*. Nature Publishing Group, 3(2), pp. 105–111. doi:
732 10.1038/nclimate1695.

733 Scottish Centre for Carbon Storage (2009) *Opportunities for CO2 Storage*
734 *around Scotland: An Integrated Strategic Research Study*.

735 Shell UK (2016) *Peterhead CCS Project FEED Summary Report for Full*
736 *CCS Chain*. Available at:
737 [https://assets.publishing.service.gov.uk/government/uploads/system/upl](https://assets.publishing.service.gov.uk/government/uploads/system/uploads/attachment_data/file/531394/11.133_-_FEED_Summary_Report_for_Full_CCS_Chain.pdf)
738 [oads/attachment_data/file/531394/11.133_-](https://assets.publishing.service.gov.uk/government/uploads/attachment_data/file/531394/11.133_-_FEED_Summary_Report_for_Full_CCS_Chain.pdf)
739 [_FEED_Summary_Report_for_Full_CCS_Chain.pdf](https://assets.publishing.service.gov.uk/government/uploads/attachment_data/file/531394/11.133_-_FEED_Summary_Report_for_Full_CCS_Chain.pdf) (Accessed: 23 May
740 2019).

741 Skjoldal, H. R. (2007) 'ICES/EuroGOOS North Sea Pilot Project', *NORSEPP*
742 *ICES/EuroGOOS*, 2. Available at: [http://www.na-](http://www.na-basin.org/reports/NORSEPP)
743 [basin.org/reports/NORSEPP](http://www.na-basin.org/reports/NORSEPP).

744 Stevens, V. (1991a) 'The Beatrice Field, Block 11/30a, UK North Sea',
745 *Geological Society, London, Memoirs*, 14(1), pp. 245–252. doi:
746 [10.1144/GSL.MEM.1991.014.01.30](https://doi.org/10.1144/GSL.MEM.1991.014.01.30).

747 Stevens, V. (1991b) 'The Beatrice Field, Block 11/30a, UK North Sea',
748 *Geological Society, London, Memoirs-1991-Stevens-245-52*, (14), pp.
749 245–252.

750 Stewart, R. J. *et al.* (2018) 'Low carbon oil production: Enhanced oil
751 recovery with CO₂ from North Sea residual oil zones', *International*
752 *Journal of Greenhouse Gas Control*. Elsevier, 75, pp. 235–242. doi:
753 [10.1016/J.IJGGC.2018.06.009](https://doi.org/10.1016/J.IJGGC.2018.06.009).

754 Sutter, D., Gazzani, M. and Mazzotti, M. (2016) 'A low-energy chilled
755 ammonia process exploiting controlled solid formation for post-
756 combustion CO₂ capture', *Faraday Discussions*, 192, pp. 59–83.

757 The Wall Street Journal (2016) *Barrel Breakdown* - *WSJ.com*. Available
758 at: <http://graphics.wsj.com/oil-barrel-breakdown/> (Accessed: 20 May
759 2019).

760 Welander, I. (2000) 'Combined cycle plant to power Snorre production
761 platforms', *Offshore Digital Magazine*. Available at: [http://www.offshore-](http://www.offshore-mag.com/articles/print/volume-60/issue-4/technology/combined-cycle-plant-to-power-snorre-production-platforms.html)
762 [mag.com/articles/print/volume-60/issue-4/technology/combined-cycle-](http://www.offshore-mag.com/articles/print/volume-60/issue-4/technology/combined-cycle-plant-to-power-snorre-production-platforms.html)
763 [plant-to-power-snorre-production-platforms.html](http://www.offshore-mag.com/articles/print/volume-60/issue-4/technology/combined-cycle-plant-to-power-snorre-production-platforms.html).

764